


Power and CCT Tunable LED Linear High Bay

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

Product Appearance



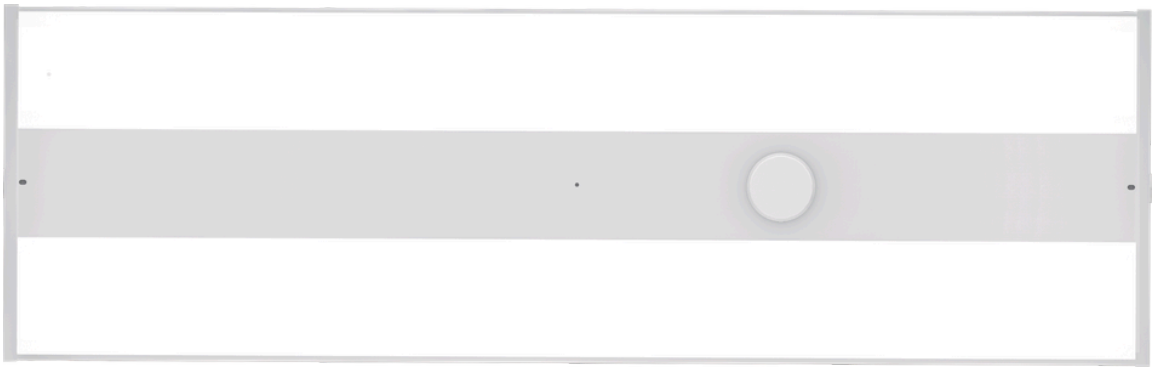

Intertek 5001965

5 Years warranty


0-10V DIMMERS

Microwave sensing

Product Features

- 1.DLC5.1 & FCC listed with LM79 & LM80.
- 2.High luminous efficacy 140 lm/W.
- 3.High quality LED driver, 0-10V dimming, Flicker free.
- 4.PF>0.95, driver efficiency >92%, THD<20%.
- 5.A new generation of integrated stamping design, with light transmittance PC cover, and UGR<28.
- 6.Installation: hanging,it can add extra motion sensor or emergency battery.
- 7.Designed for warehouses, gymnasiums, and industrial spaces.
- 8.Five years warranty.


Product Dimension

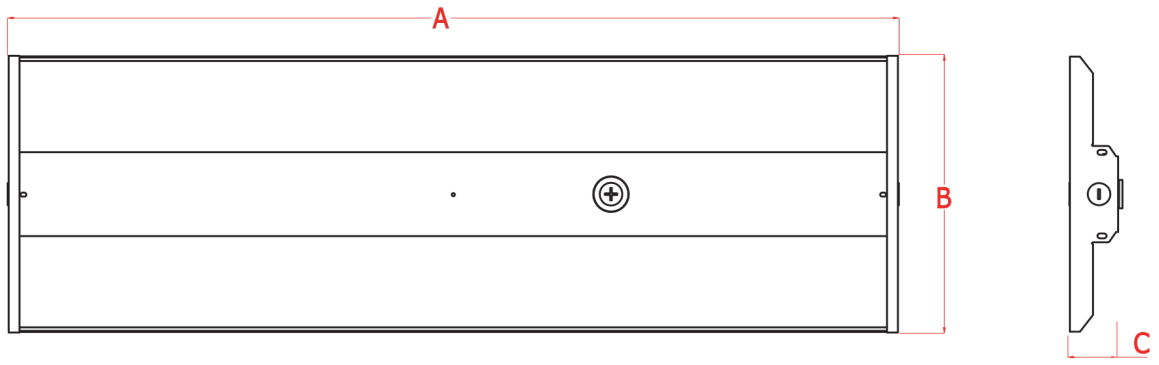

	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
	23.74"(603mm)	11.02"(280mm)	1.89"(48mm)
	47.76"(1213mm)	11.02"(280mm)	1.89"(48mm)
	23.74"(603mm)	11.02"(280mm)	1.89"(48mm)
	47.76"(1213mm)	11.02"(280mm)	1.89"(48mm)

Specification


	Power (Tunable)	Input Voltage	Input Current	Light Efficacy	PF	Ra	CCT (Tunable)
	120W-165W-220W	AC120-277V	1.8A	140lm/W	>0.95	>80	4000K-5000K
	165W-225W-325W	AC120-277V	2.7A	140lm/W	>0.95	>80	4000K-5000K
	120W-165W-220W	AC277-480V	0.8A	140lm/W	>0.95	>80	4000K-5000K
	165W-225W-325W	AC277-480V	1.2A	140lm/W	>0.95	>80	4000K-5000K

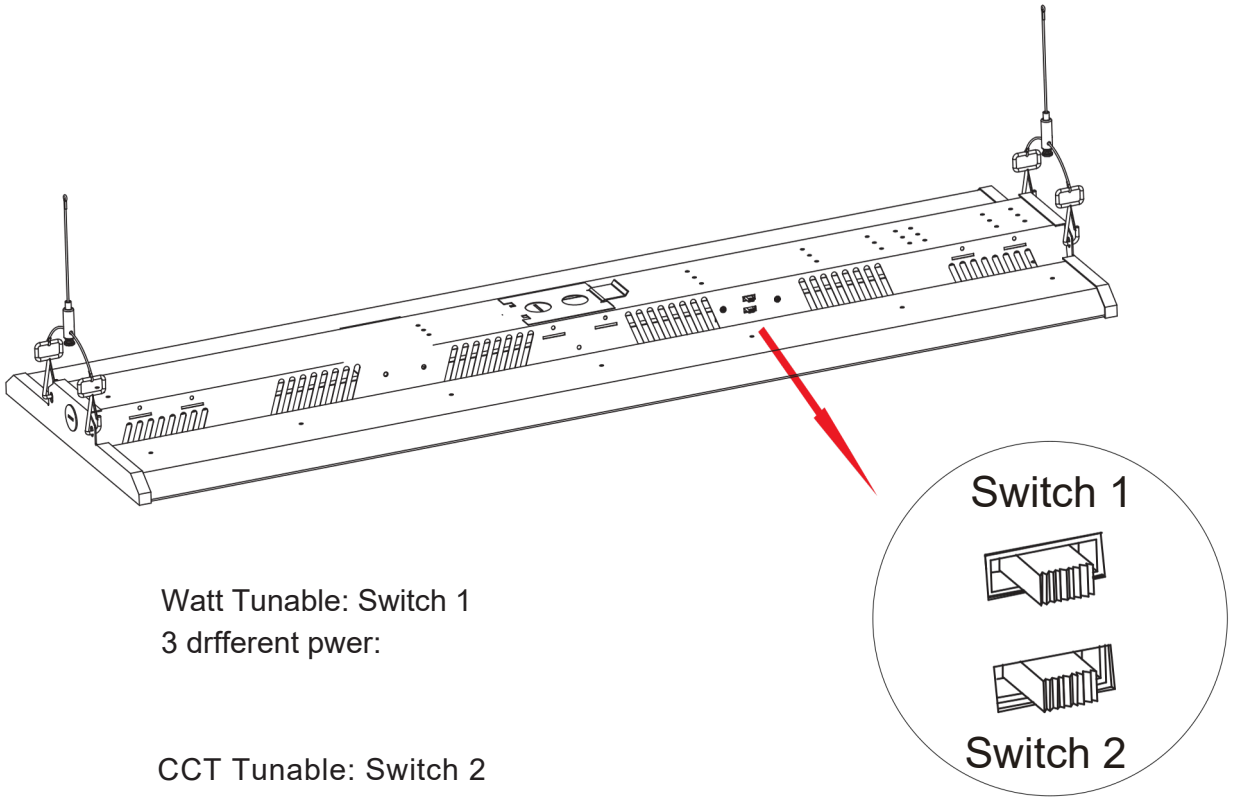

Watt Tunable: Switch 1
3 drfferent pwer:

CCT Tunable: Switch 2
4000K-5000K

MOUNTED TO LINEAR HIGH BAY LIGHT

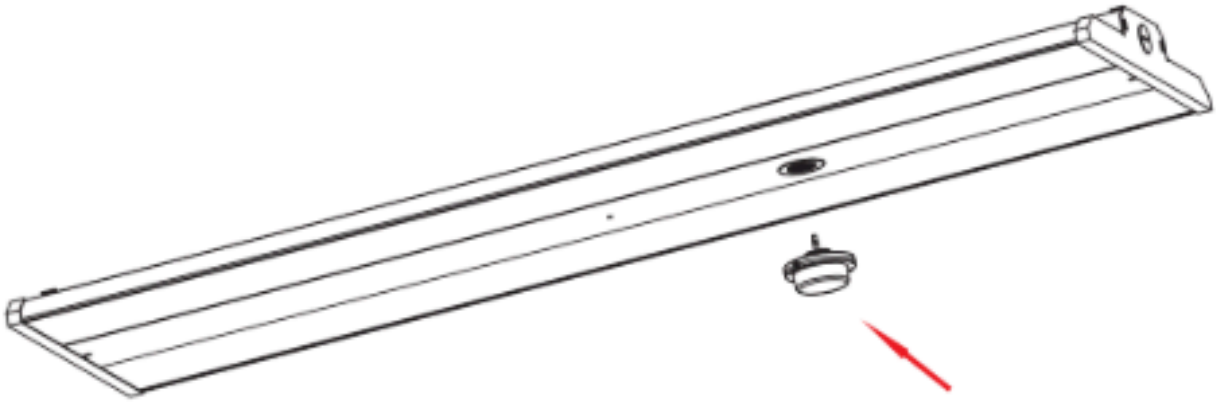


	Sensor Type	Connector	Controller
Bluetooth	PIR	Audio Jack	Keilton APP
			SPEC-RM51
			RC-100
			HD06R
Bluetooth			HAISEN BLUE APP
	Microwave		SPEC-RM51
			RC-100
			HD06R
Bluetooth			HAISEN BLUE APP

Networked Lighting Controls: HAISEN BLUE / GEBC / Keilton


INSTALLATION INSTRUCTIONS

Please cut off the power before installation


1.Remove the dust proof cover.

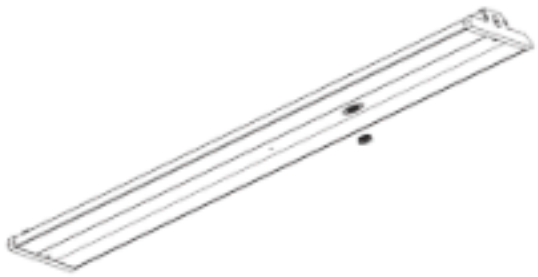

2.Installing a sensor.

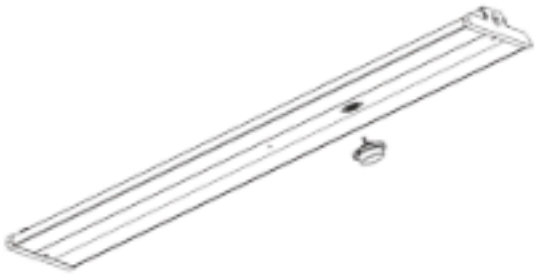


3.Drill two holes in the ceiling put the hook into the hole.

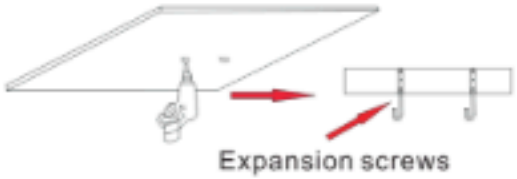


4.Take Y shape stainless steel rope out of the package.




5.Insert the hook into the slotted holes as shown below.

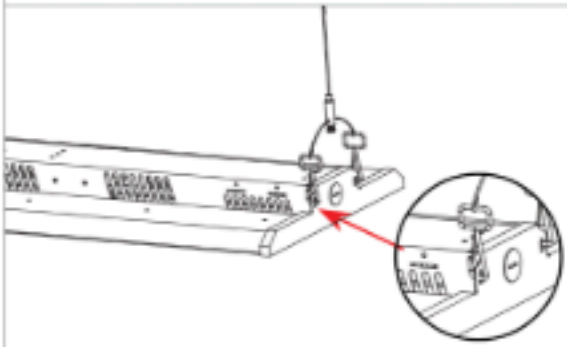


6.Hook up the safety steel on the ceiling anchor.

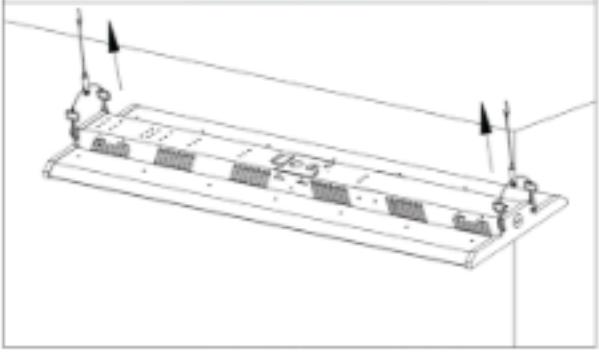

7.Turn off power,and make wiring connections with screw-on wire connectors insert the terminal cap and wires into the driver box.

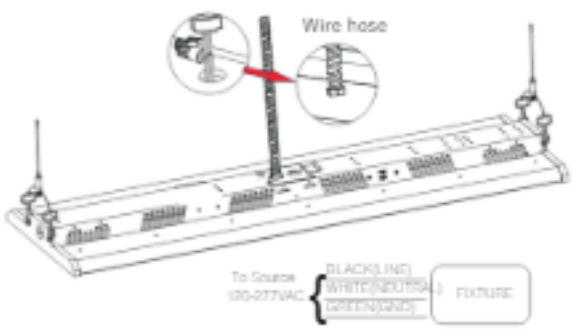

8.Toggle the dip switch to required power.

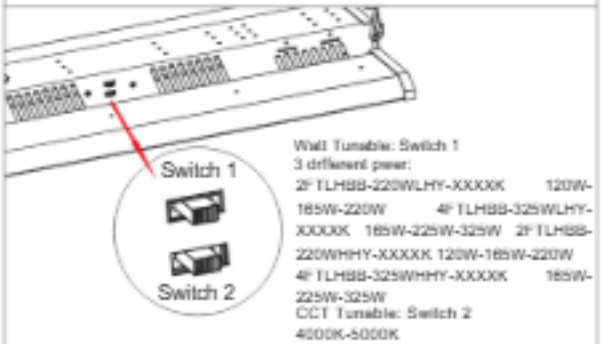


Packing /weight

	Outer Carton Size (LxWxH)	Qty/Carton (pcs)	20GP (QTY)	40HQ (QTY)
	25.12"*8.66"*12.13" (638*220*308mm)	4	2528	6076
	49.13"*8.66"*12.13" (1248*220*308mm)	4	1304	3128
	25.12"*8.66"*12.13" (638*220*308mm)	4	2528	6076
	49.13"*8.66"*12.13" (1248*220*308mm)	4	1304	3128

Packing

4pcs/box

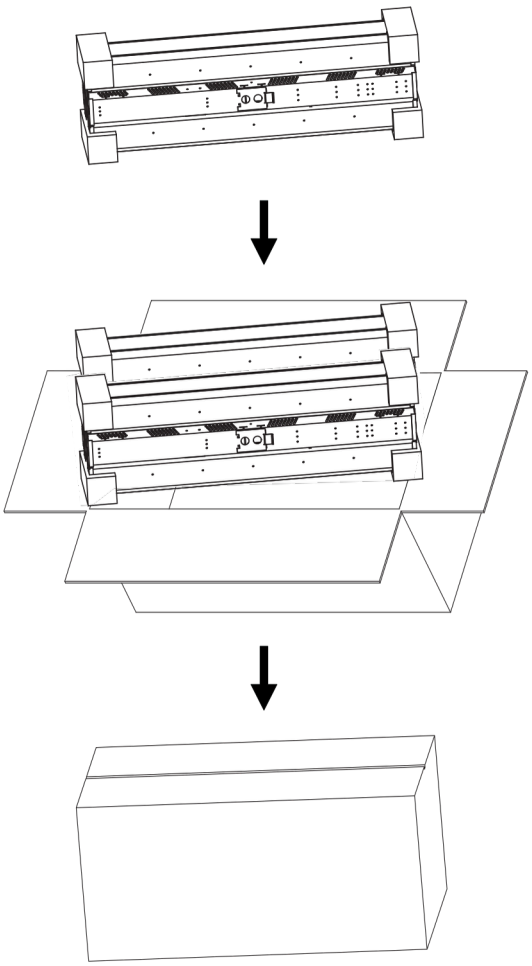

LED Linear High Bay





Note

1.The installation and maintenance must be completed by electricians or professionals.
2.Please cut off the power before installation and maintenance.
3.The fixture is not allowed to be covered by thermally insulating material.
4.Please keep away from the corrosive substance,and keep the fixture dry and clean.
5.Working temperature:-4°F~104°F,storage temperature:-22°F~140°F.