

LED Landscaping Light



Lumens Depot Landscaping lights are the best solutions to replace HID lamps. Superior performance and robust design make this product suitable for any general purpose landscape lighting application such as garden, signage, and accent lighting in heavy commercial and residential applications. Its great for lighting flags, monuments, steeples, and bridges.

- High Lumens per watt
- Easy to install and operate
- Ground Stake or Lawn Base options
- Wide rotation angle, flexible and convenient
- Durable, anti-aging, and resists damage
- Aluminum Alloy housing
- Good heat dissipation and anti-corrosion
- Optical-grade PC lampshade
- Transparent polycarbonate optical lens
- No UV or IR in the beam
- Strict waterproof and dustproof treatment for dry or wet locations
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury
- Universal 100-277Vac

LED Landscaping Light

Boise Series

Watts	Lumens	CCT	Housing Color	Input Voltage	Mount
10W	800Lm	3000K	Brown	12VAC/DC	Ground Stake
10W	1000Lm	3000K	Brown	100-277Vac	Lawn Base

Wide rotation angle,
flexible and convenient




Specifications

Color:	Brown
Driver:	Non-dimmable driver
Power:	10W
Voltage:	12VAC/DC 100-277VAC 50/60Hz
Product Size:	4.1339" X 2.7559" X 6.5748" 4.5276" X 2.7559" X 8.8583"
CRI:	Ra≥80
CCT:	3000K
Source:	COB
Beam Angle:	100°
Led Q'ty:	1 pcs
Applicable Environment	Dry/wet location
Cover Type:	Transparent PC
Lumens:	800LM 1000LM
Light Efficacy:	up to 80Lm/W up to 100Lm/W ETL
Package:	4" X 3" X 8" 5" X 4" X 10"
Package Q'ty:	40pcs 12pcs




CORRELATED COLOR TEMPERATURE (CCT)

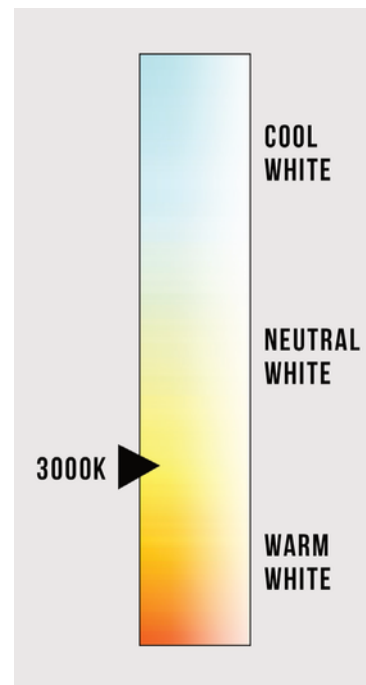

LED Landscaping Light

Distribution Diagram

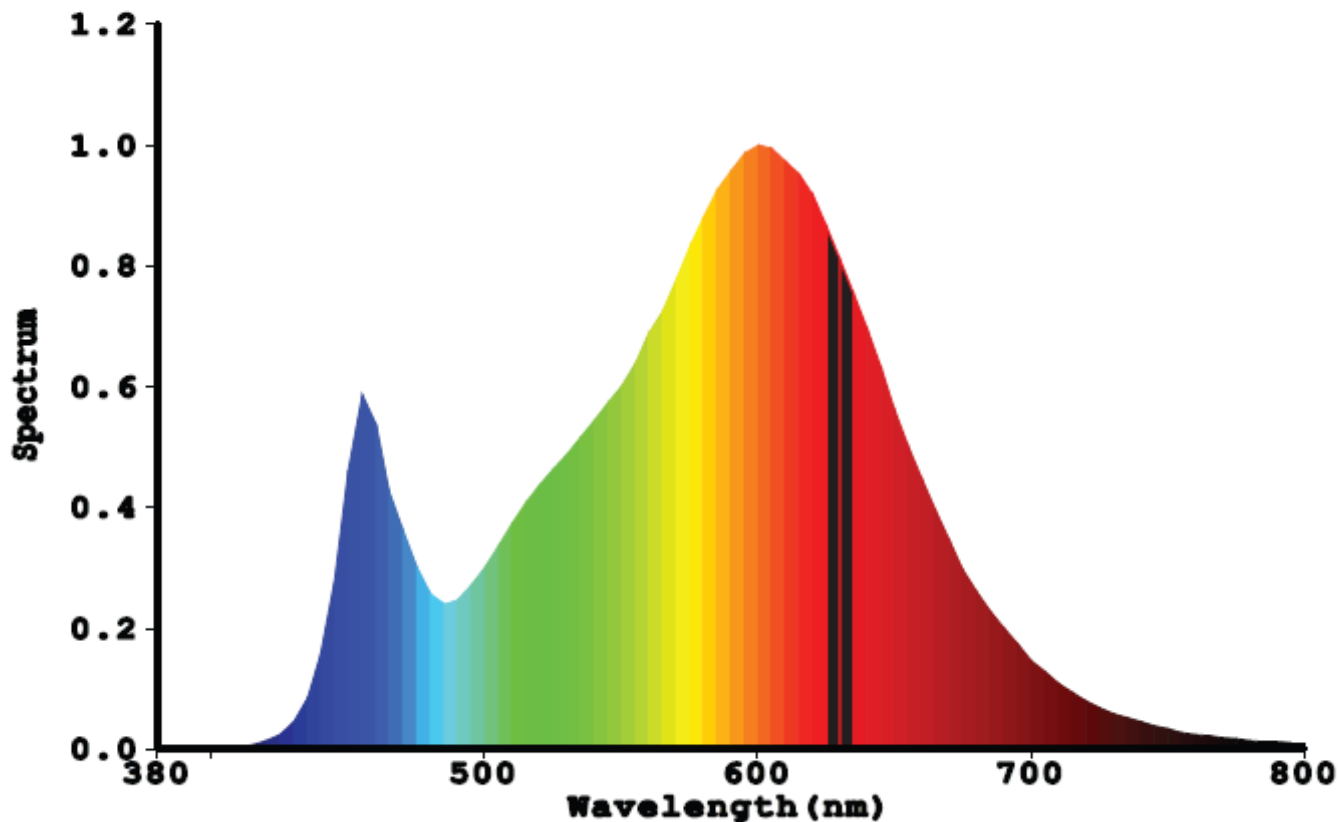

Color Parameters:

Chromaticity Coordinate: $x=0.4316(dx=-0.0027)$ $y=0.3975(dy=-0.0057)$
Chromaticity Coordinate: $u'=0.2500$ $v'=0.5180(duv=-1.90e-03)$
 $T_c=3038K$ Dominant WL: $\lambda_d=583.4nm$ Purity=48.8% Centroid WL: $588.0nm$
Ratio: R=24.5% G=72.8% B=2.7% Peak WL: $\lambda_p=600.0nm$ HWL: $122.8nm$
Render Index: $R_a=81.8$

R1 =81 R2 =93 R3 =94 R4 =78 R5 =81 R6 =91 R7 =80
R8 =57 R9 =5 R10=83 R11=76 R12=70 R13=84 R14=97 R15=74

Photo Parameters:


Flux: 792.34 lm Fe: 2.4202 W Efficacy: 82.26 lm/W

Electrical Parameters:

Luminaire: U=110.2V I=0.08883A P=9.632W PF=0.9835


Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm [0] Ip=33037 (G=5, D=58)
REF=27248 (R=3)%=-0.224% PMT: 30.4 centigrade [150.0]

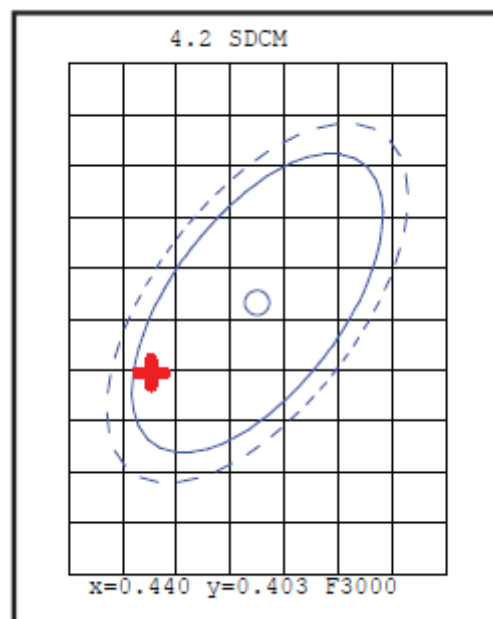

LED Landscaping Light

Installation


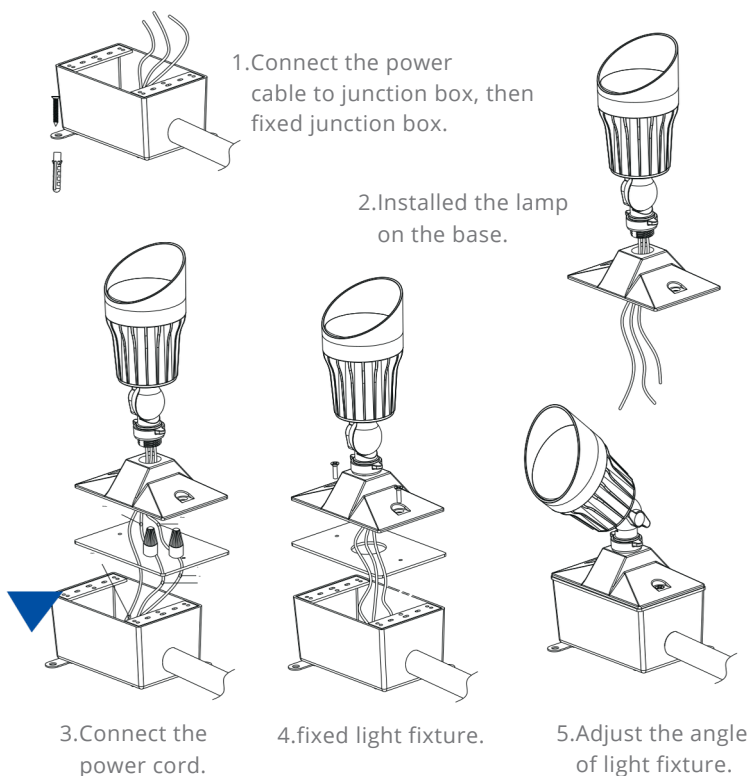


Warning: Risk of electrical shock Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply; Verify that supply voltage is within right and reasonable limits. Connect the fixture with 100-277V 50/60Hz power supply; Make all electrical and grounded connections in accordance with the National Electrical Code and applicable local code requirements; All wiring connections should be capped with UL approved wire connections. Warning: Risk of burn Wear gloves and safety glasses at all times when moving luminaire from carton, installing, servicing or performing maintenance; Avoid direct eye exposure to the light source while it is on. LED lights are very bright. Do not stare LED light beam in any case. Or this may cause irreparable damage to the eyes.; Allow fixture to cool before handling. Do not touch enclosure or light source; Do not exceed maximum wattage marked on luminaire label. Warning: beware of fire Keep combustible and other materials that can burn away from lamp/lens..



LED Landscaping Light




Dimensions

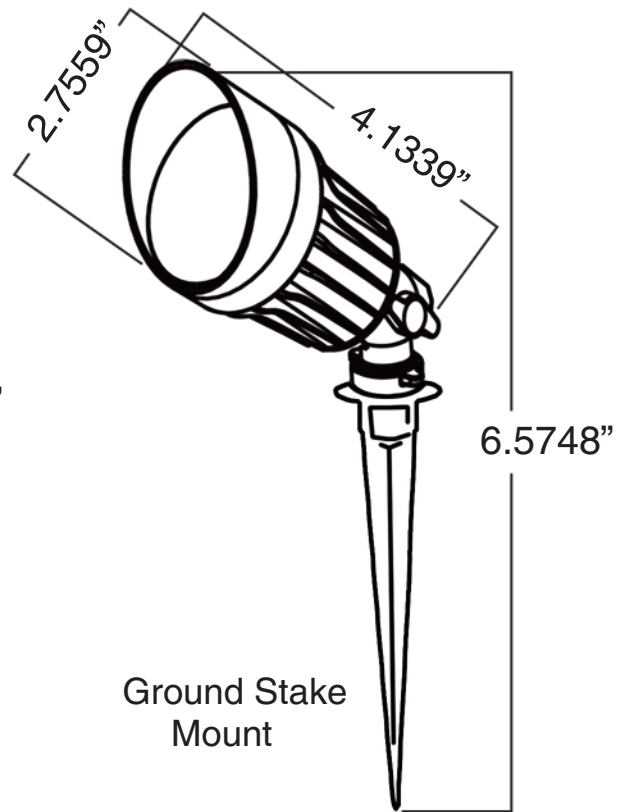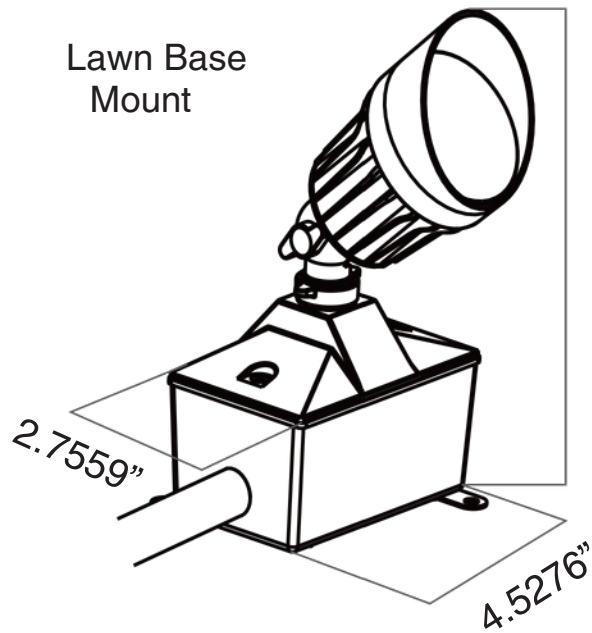

LED Landscaping Light

Packaging

	Mount	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
	Ground Stake	4	-	- Lb			
	Lawn Base	4	-	- Lb			

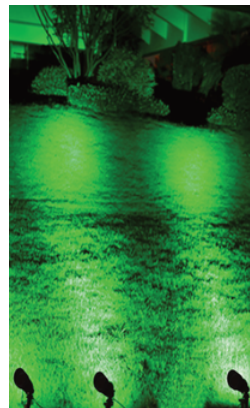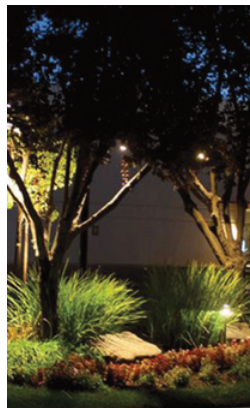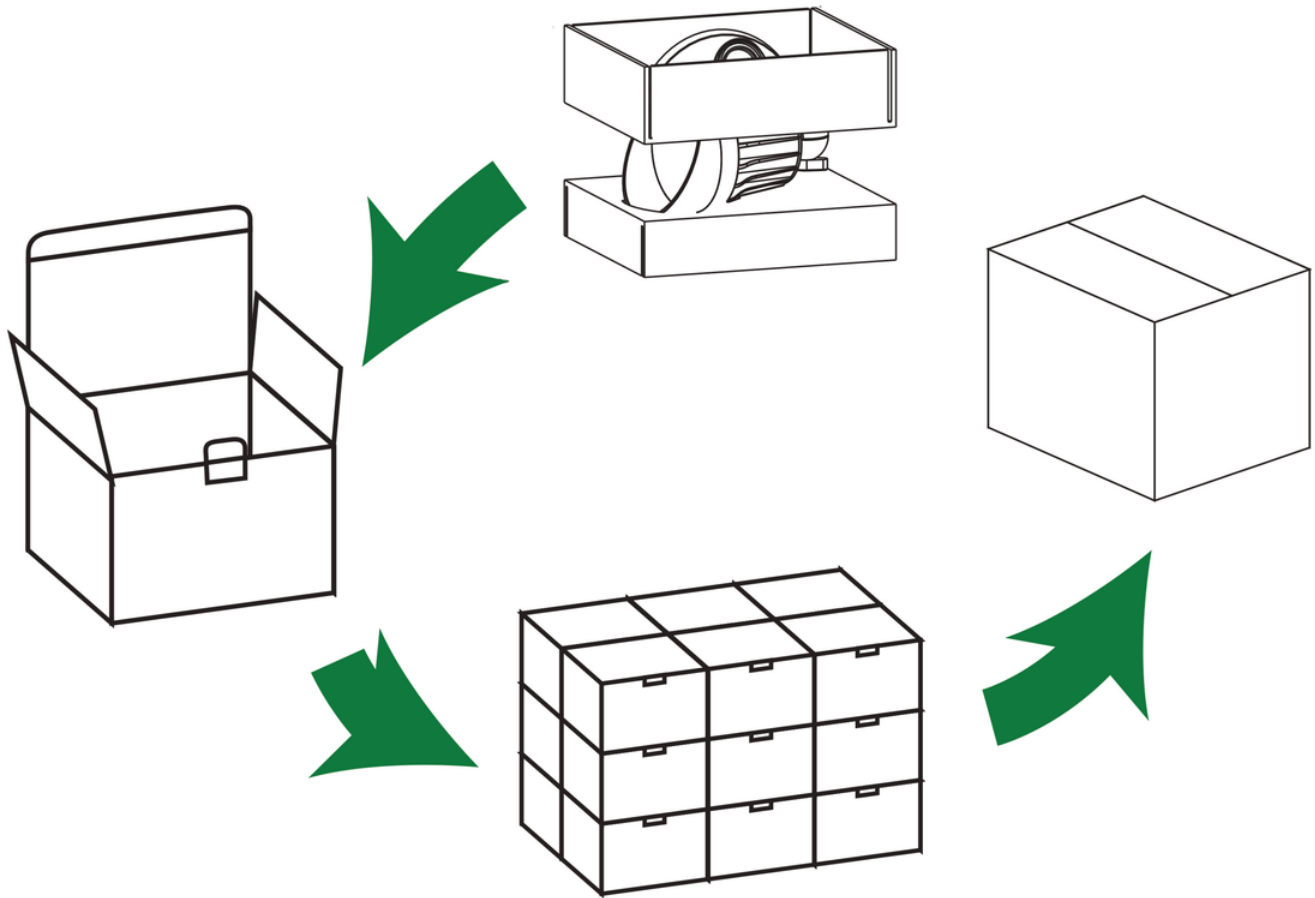

LED Landscaping Light

Application



User Notice

- Please turn off the power before installing or changing assembly parts.
- The input voltage and lamps should be matching. Before connecting the power line, please make sure the wiring section is insulated.
- Only professionals should install and disassemble the lamps.

Trouble Shooting

- Flickering light - Turn off the power and turn on again in 3 minutes. If the same phenomena occurs, then call Support.
- Not working - Please check all power connections.