

LED WALL PACK LIGHT

WATTAGES: 80/60/45W,120/100/90W Tunable



The Wall Pack series half cut wall pack retains the traditional installation method and meets the installation needs of most occasions.



Product Features:

- Aesthetic, utility appearance, and patented;
- High transmittance anti UV PC lens.
- Low-voltage light control sensor can be installed, which is safe and reliable;
- Power and CCT selectable are available to meet the different needs of customers and reduce the inventory pressure ;
- Easy and fast installation , and traditional junction box installation method is retained;
- IP65, completely waterproof and dustproof;
- 120-277V/0-10V and 120-347V/277-480V,0-10V dimming power supply are available.

SPECIFICATION		
WATTAGE	80/60/45W Tunable	120/100/90W Tunable
LUMENS	12336LM(Max)	17340LM(Max)
CCT	3000K/4000K/5000K Tunable	
CRI	Ra>70	
INPUT VOLTAGE	AC 120-277V/AC120-347V/AC277-480V	
OPERATING TEMPERATURE	-40°F~113°F	
STORAGE TEMPERATURE	-40°F~158°F	
POWER FACTOR	>0.9	
DRIVER EFFICIENCY	>90%	
PROTECTION LEVEL	Wet Location	
LIFE TIME	>50000 hours	
WARRANTY	5 years limited	



LED WALL PACK LIGHT

WATTAGES: 80/60/45W,120/100/90W Tunable

Packing/Weight

Model	Inner box (1pcs/ctn)	Outber box (4pcs/ctn)	N.W (1pcs/ctn)	N.W (1pcs/ctn)	N.W (4pcs/ctn)	G.W (4pcs/ctn)
80W/60W/45W	L14.56xW9.69xH8.19 inch L370xW246xH208 mm	L20.35xW15.35xH17.95 inch L518xW390xH456 mm	5.29 LBS(2.4Kg)	6.17 LBS(2.8Kg)	21.16 LBS(9.6Kg)	26.9 LBS(12.2Kg)
120W/100W/90W						

Product Dimension

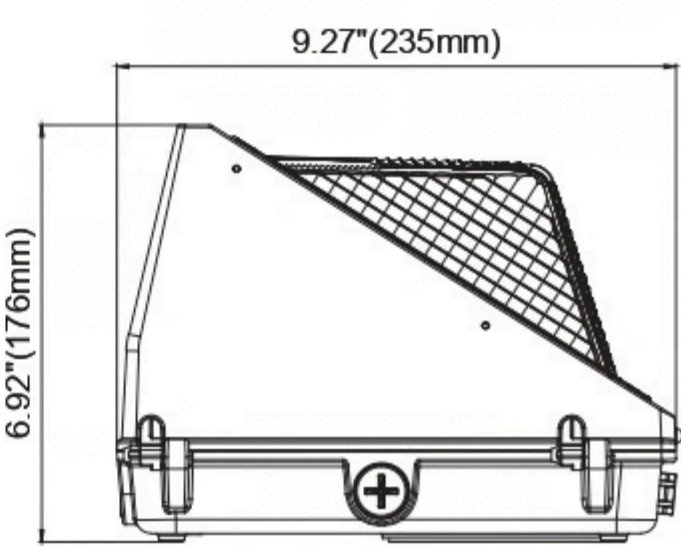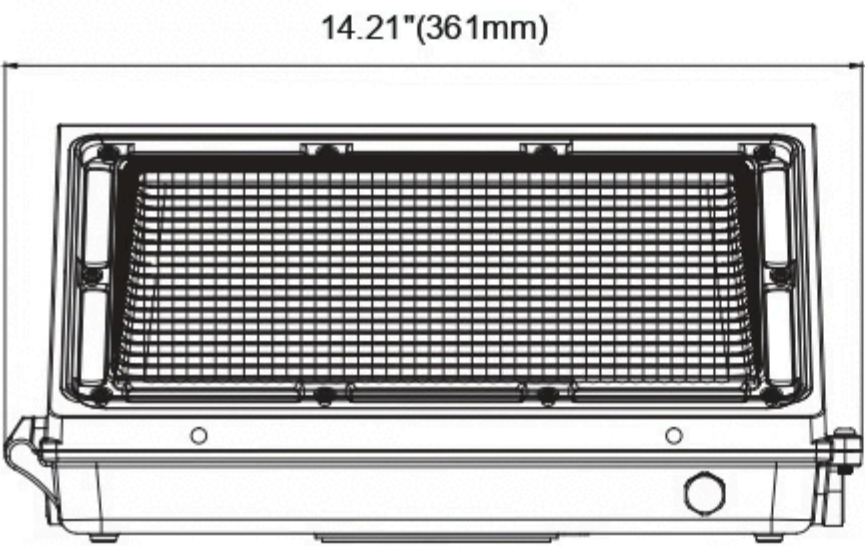

Product Accessories

ACCESSORIES MOUNTING BRACKETS(Standard)



ACCESSORIES(Sold Separately)











LED WALL PACK LIGHT

WATTAGES: 80/60/45W,120/100/90W Tunable

PHOTOMETRICS:

For complete IES files, please visit our website.

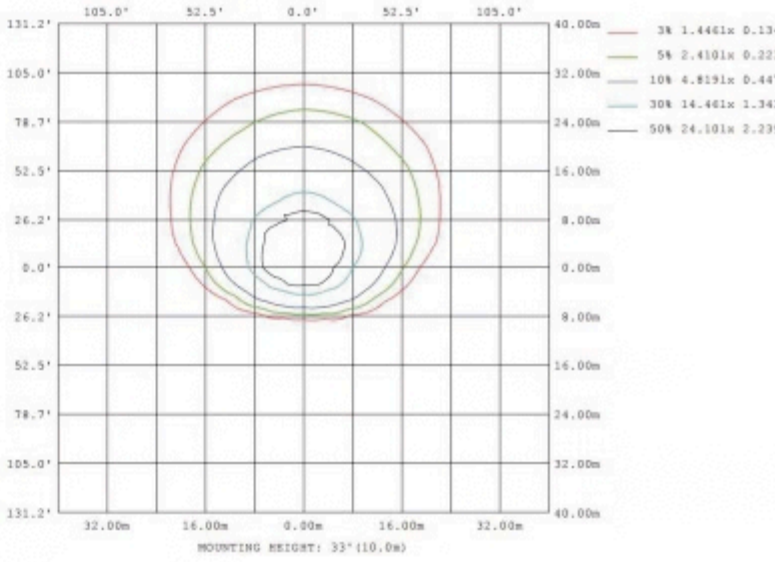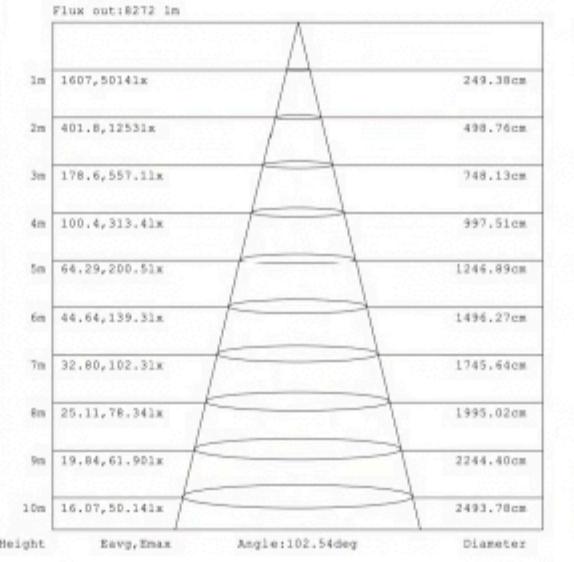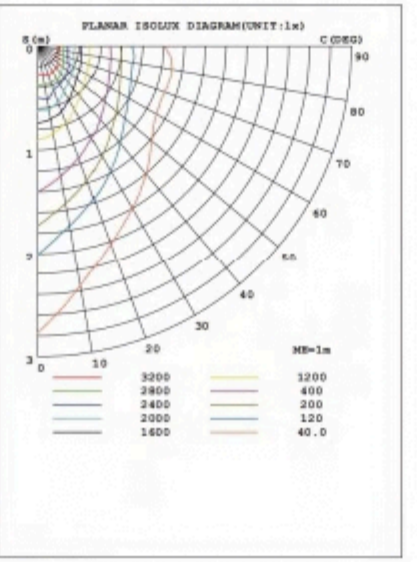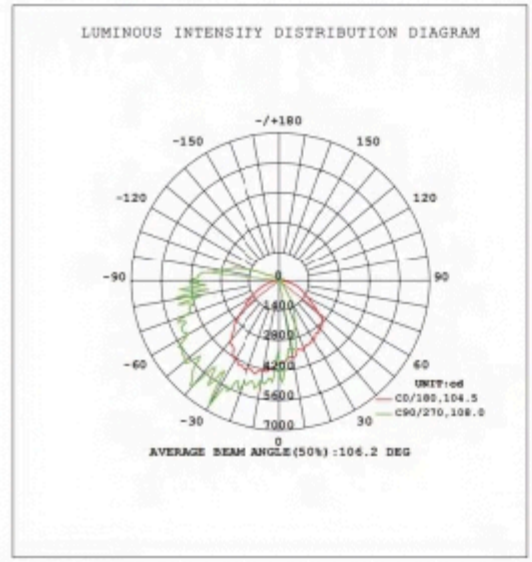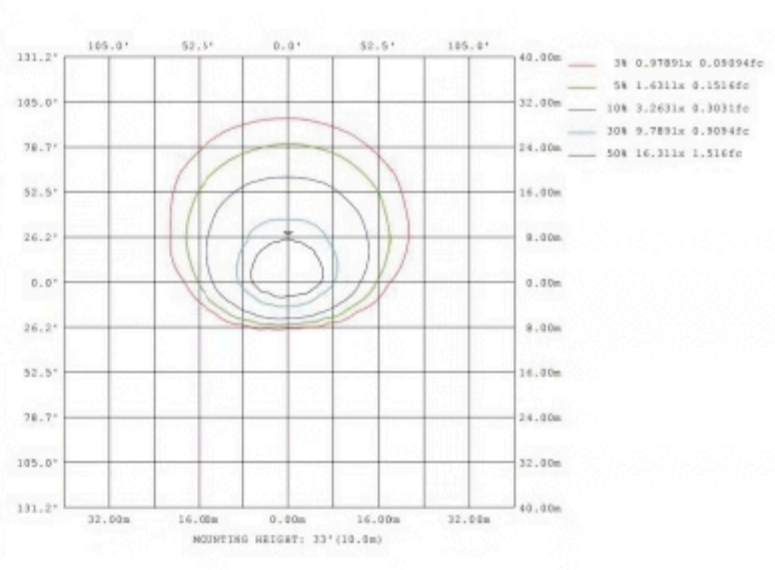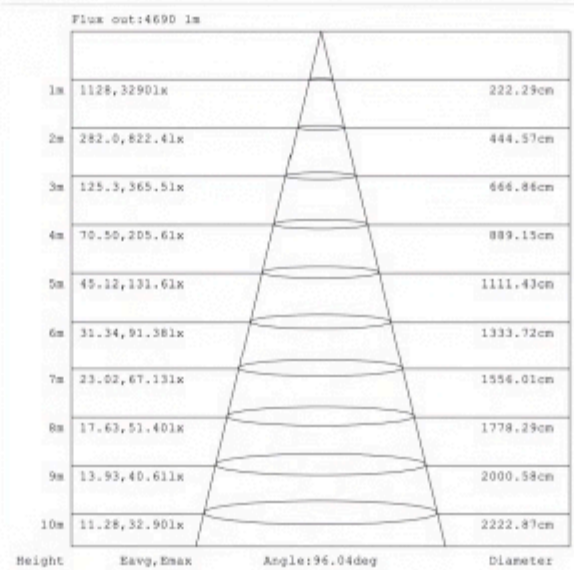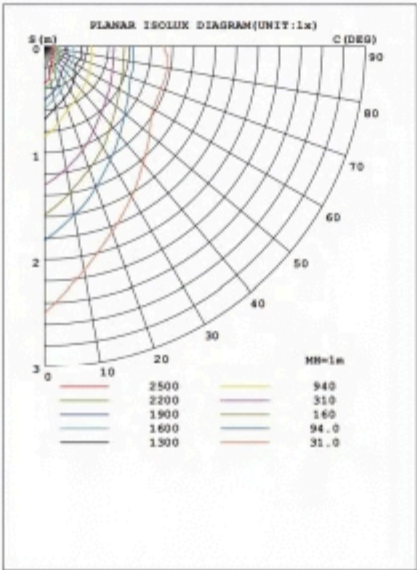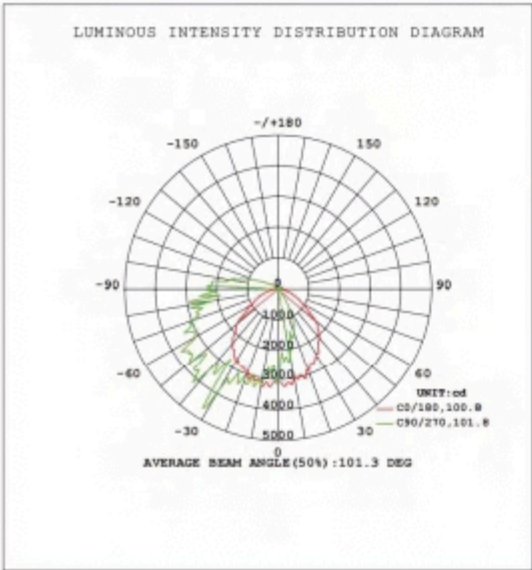


LED WALL PACK LIGHT


WATTAGES: 80/60/45W,120/100/90W Tunable

Installation Instruction


1. Use a screw driver to unscrew the lamp screws and remove the upper half of the fixture.

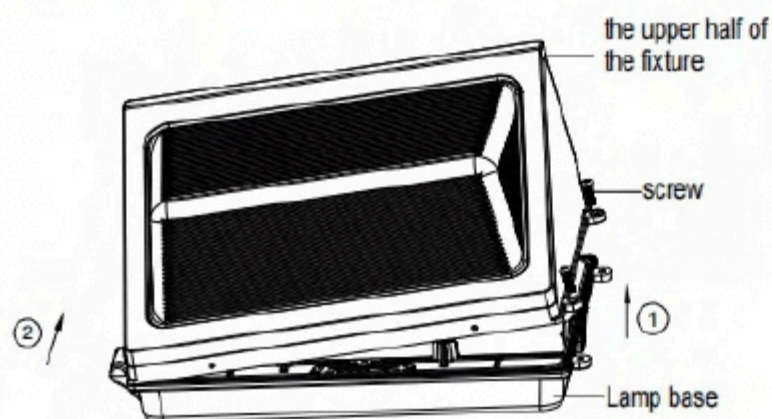


2. Unscrew the cover of the entry hole on the lamp base and remove the cover.

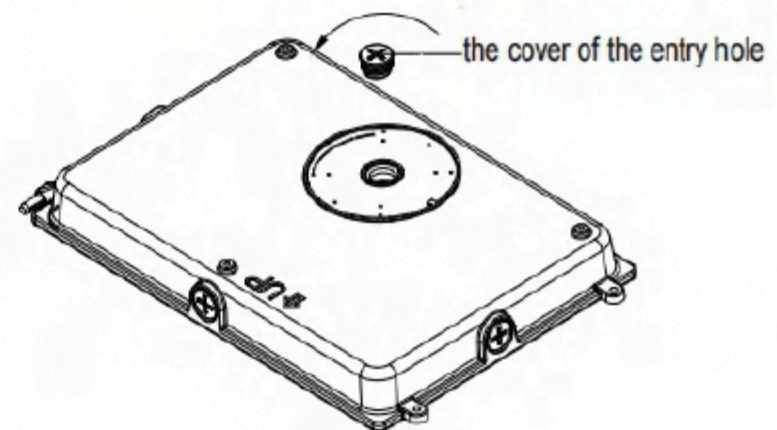


3. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.

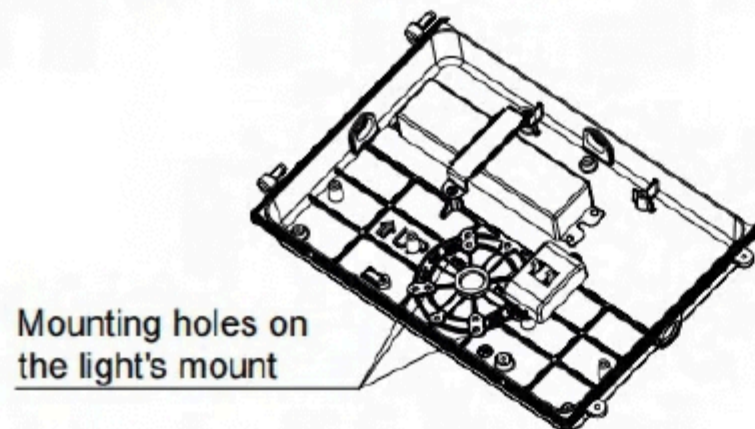


4. Put the input line in the embedded box passes through the waterproof pad and then passed through the lamp base.

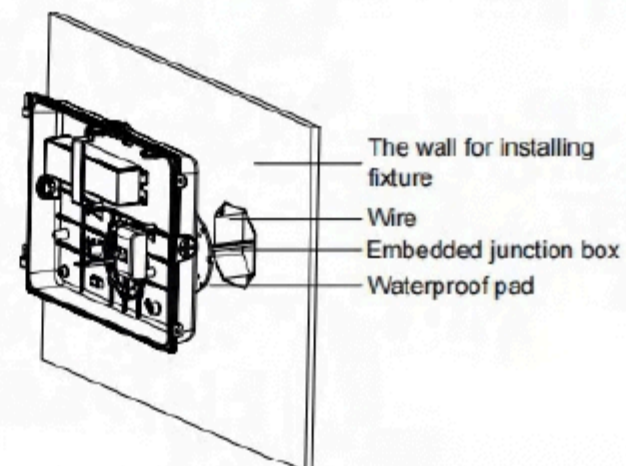


5. Use screw to lock the lamp base on the embedded junction box.

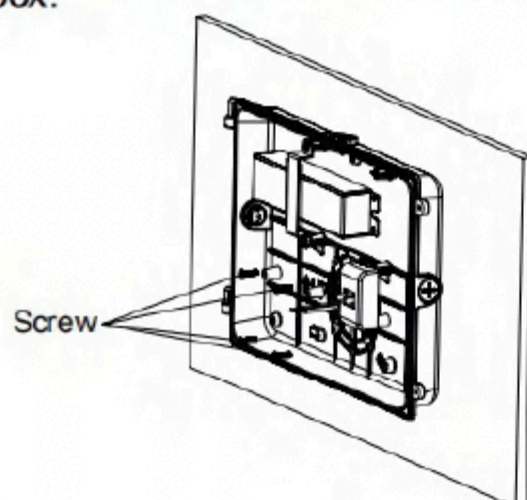


6. Connect the input wire and the dimming wire of the light, then put the connected wires into the embedded terminal box.

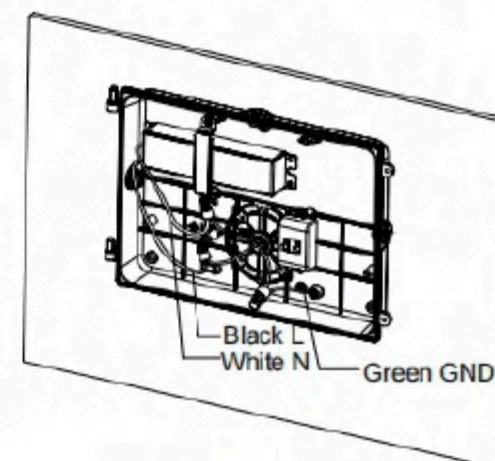

7. Connect the out put wires of driver with the wires of PCB board. Please use "Dipper Switch", to achieve "Power and CCT Tunable" function.

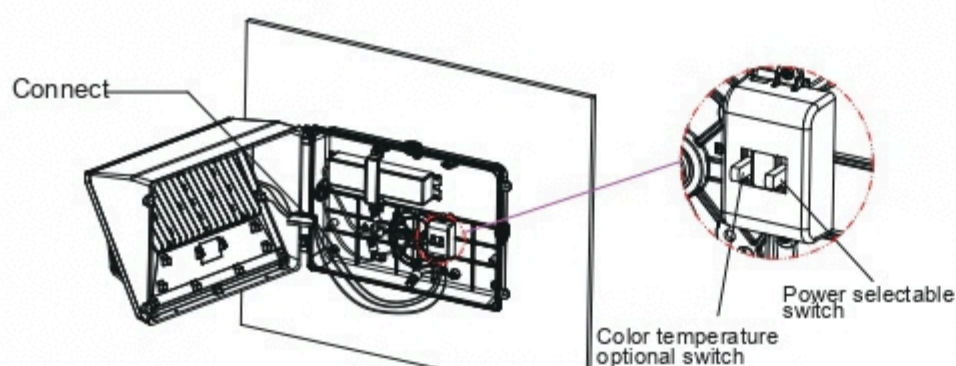

8. Use screws to lock the fixture. Installation completed.

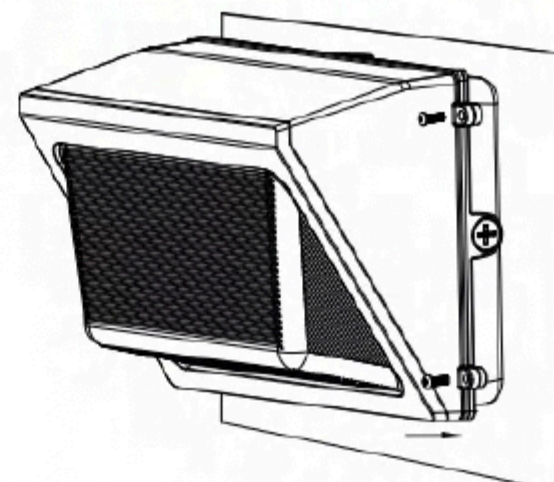

LED WALL PACK LIGHT

WATTAGES: 80/60/45W,120/100/90W Tunable

Applications:

