

LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable



1X4



2X4



2X2

This troffer is field-adjustable, and can be programmed with a CCT of 3500/4000/5000/5700/6500K, eliminating the need to stock multiple color temperatures. Ideal use for office spaces, walkways, schools/campuses, shopping centers, hospitality and health care industry. Ideal use for office spaces, walkways, schools/campuses, shopping centers, hospitality and health care industry.



PRODUCT FEATURES:

★ CONSTRUCTION

Constructed done-piece ribbed unitized housing and corners that interlock, preventing damage to luminaire. All sides and corners are buned in and interlocked, making sharp edges for safe handling and installation.

★ ELECTRICAL

Luminaire is built with the highest quality 120-277Vac & 120-347Vac drivers.

★ OPTICAL SYSTEM

Designed to reduce glare and improve light distribution through precision formed.

★ DIMMING

0-10V dimmable standard.

★ LISTING

ETL Listed, FCC, RoHS, CE

★ WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours (Refer to your warranty documentation for more information.)

5 CCT SELECTABLE:

SPECIFICATION			
WATTAGE	40/30/25/20/15W	40/30/25/20/15W	50/40/35/30/25W
CCT	3500K/4000K/5000K/5700K/6500K Tunable		
LUMENS	4700LM(Max)	4700LM(Max)	6300LM(Max)
CRI	Ra>80		
INPUT VOLTAGE	AC120-277V/AC120-347V		
DISTRIBUTION	120°		
DRIVER EFFICIACY	>85%		
LIFE SPAN	50,000 hours		
TEMPERATURE	-40°F~113°F		
STORAGE TEMPERATURE	-40°F~176°F		
OUTDOOR RATING	IP40, Suitable for damp locations		
WARRANTY	3 years limited		


LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

IMAGES:



Product Dimension:

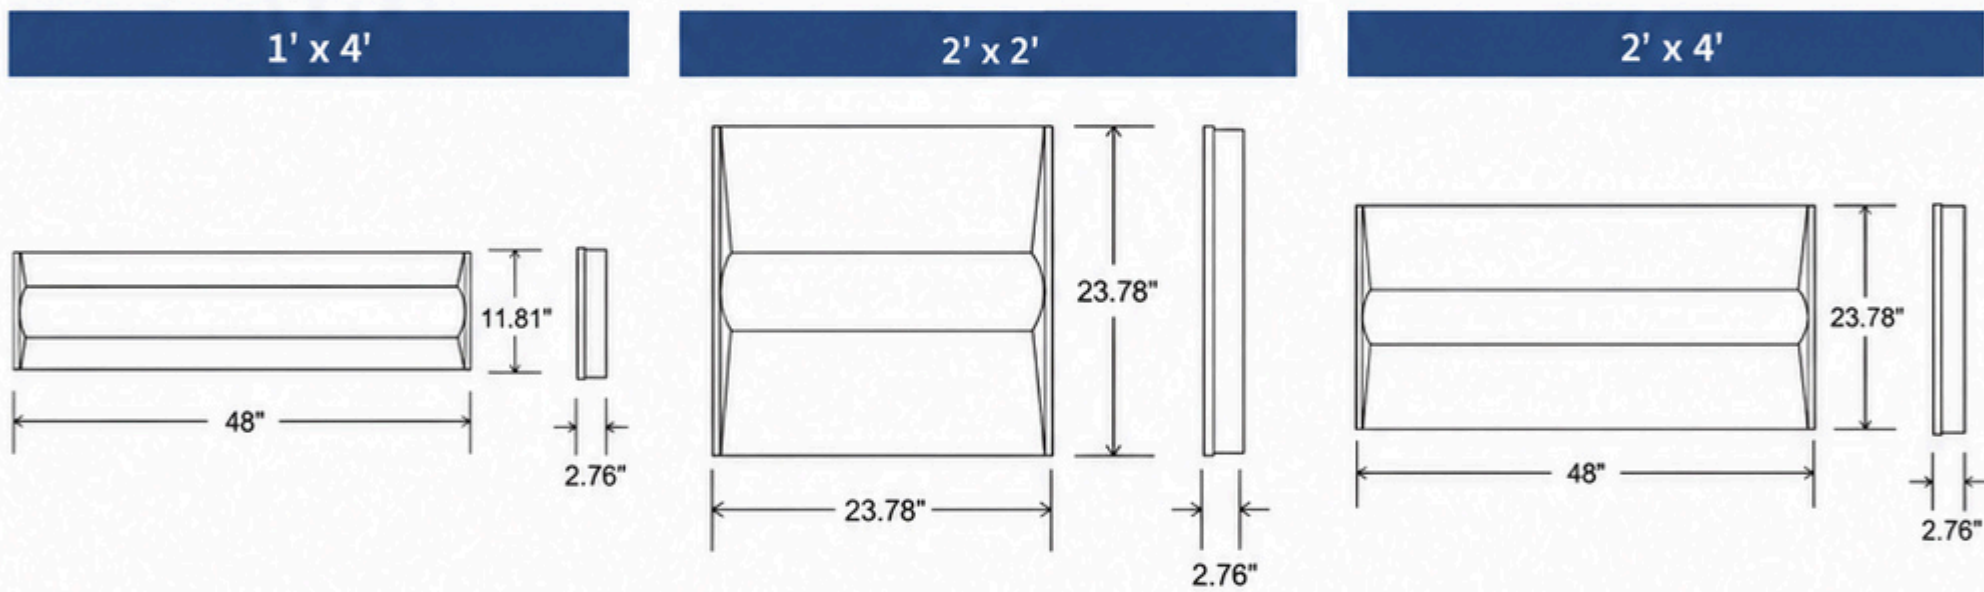


PRODUCT DIMENSION:

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
1x4FT	Outer Packing Size	L48.81xW6.27xH13.78 inch L1255xW210xH350 mm	20.06Lbs(9.34Kg)	22.49Lbs(10.2Kg)	4pcs/ctn
2x2FT	Outer Packing Size	L24.81xW5.90xH24.96 inch L630xW215xH630 mm	10.94Lbs(4.96Kg)	25.37Lbs(10.0Kg)	4pcs/ctn
2x4FT	Outer Packing Size	L48.62xW5.90xH24.96 inch L1235xW215xH630 mm	37.70Lbs(17.1Kg)	41.01Lbs(18.6Kg)	4pcs/ctn

LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

POWER AND CCT TUNABLE AVAILABLE:

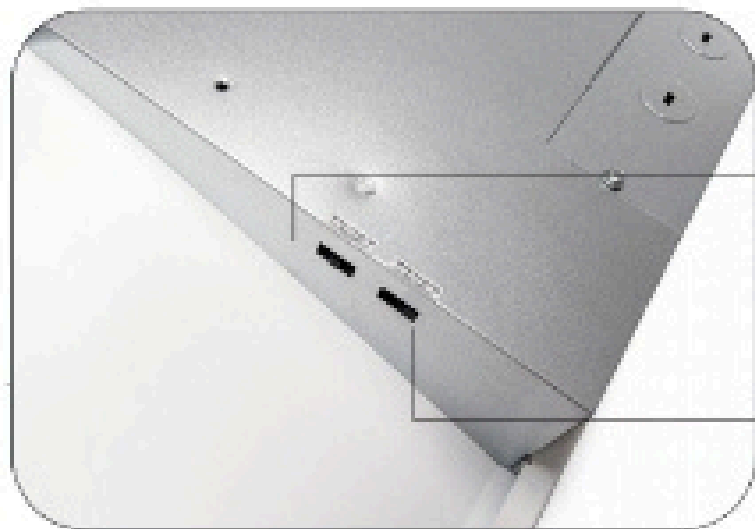

Switch of Power selectable

Switch of CCT selectable

MULTIPLE SENSOR SOLUTIONS AVAILABLE

Quick and Easy in-field installation of sensors.
(The sensor receptacle is pre-embedded in the profile frame.)



Product Accessories(SOLD SEPARATELY):



External Sensor




Emergency Driver

LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

DISTRIBUTION

For complete IES files, please visit our website.

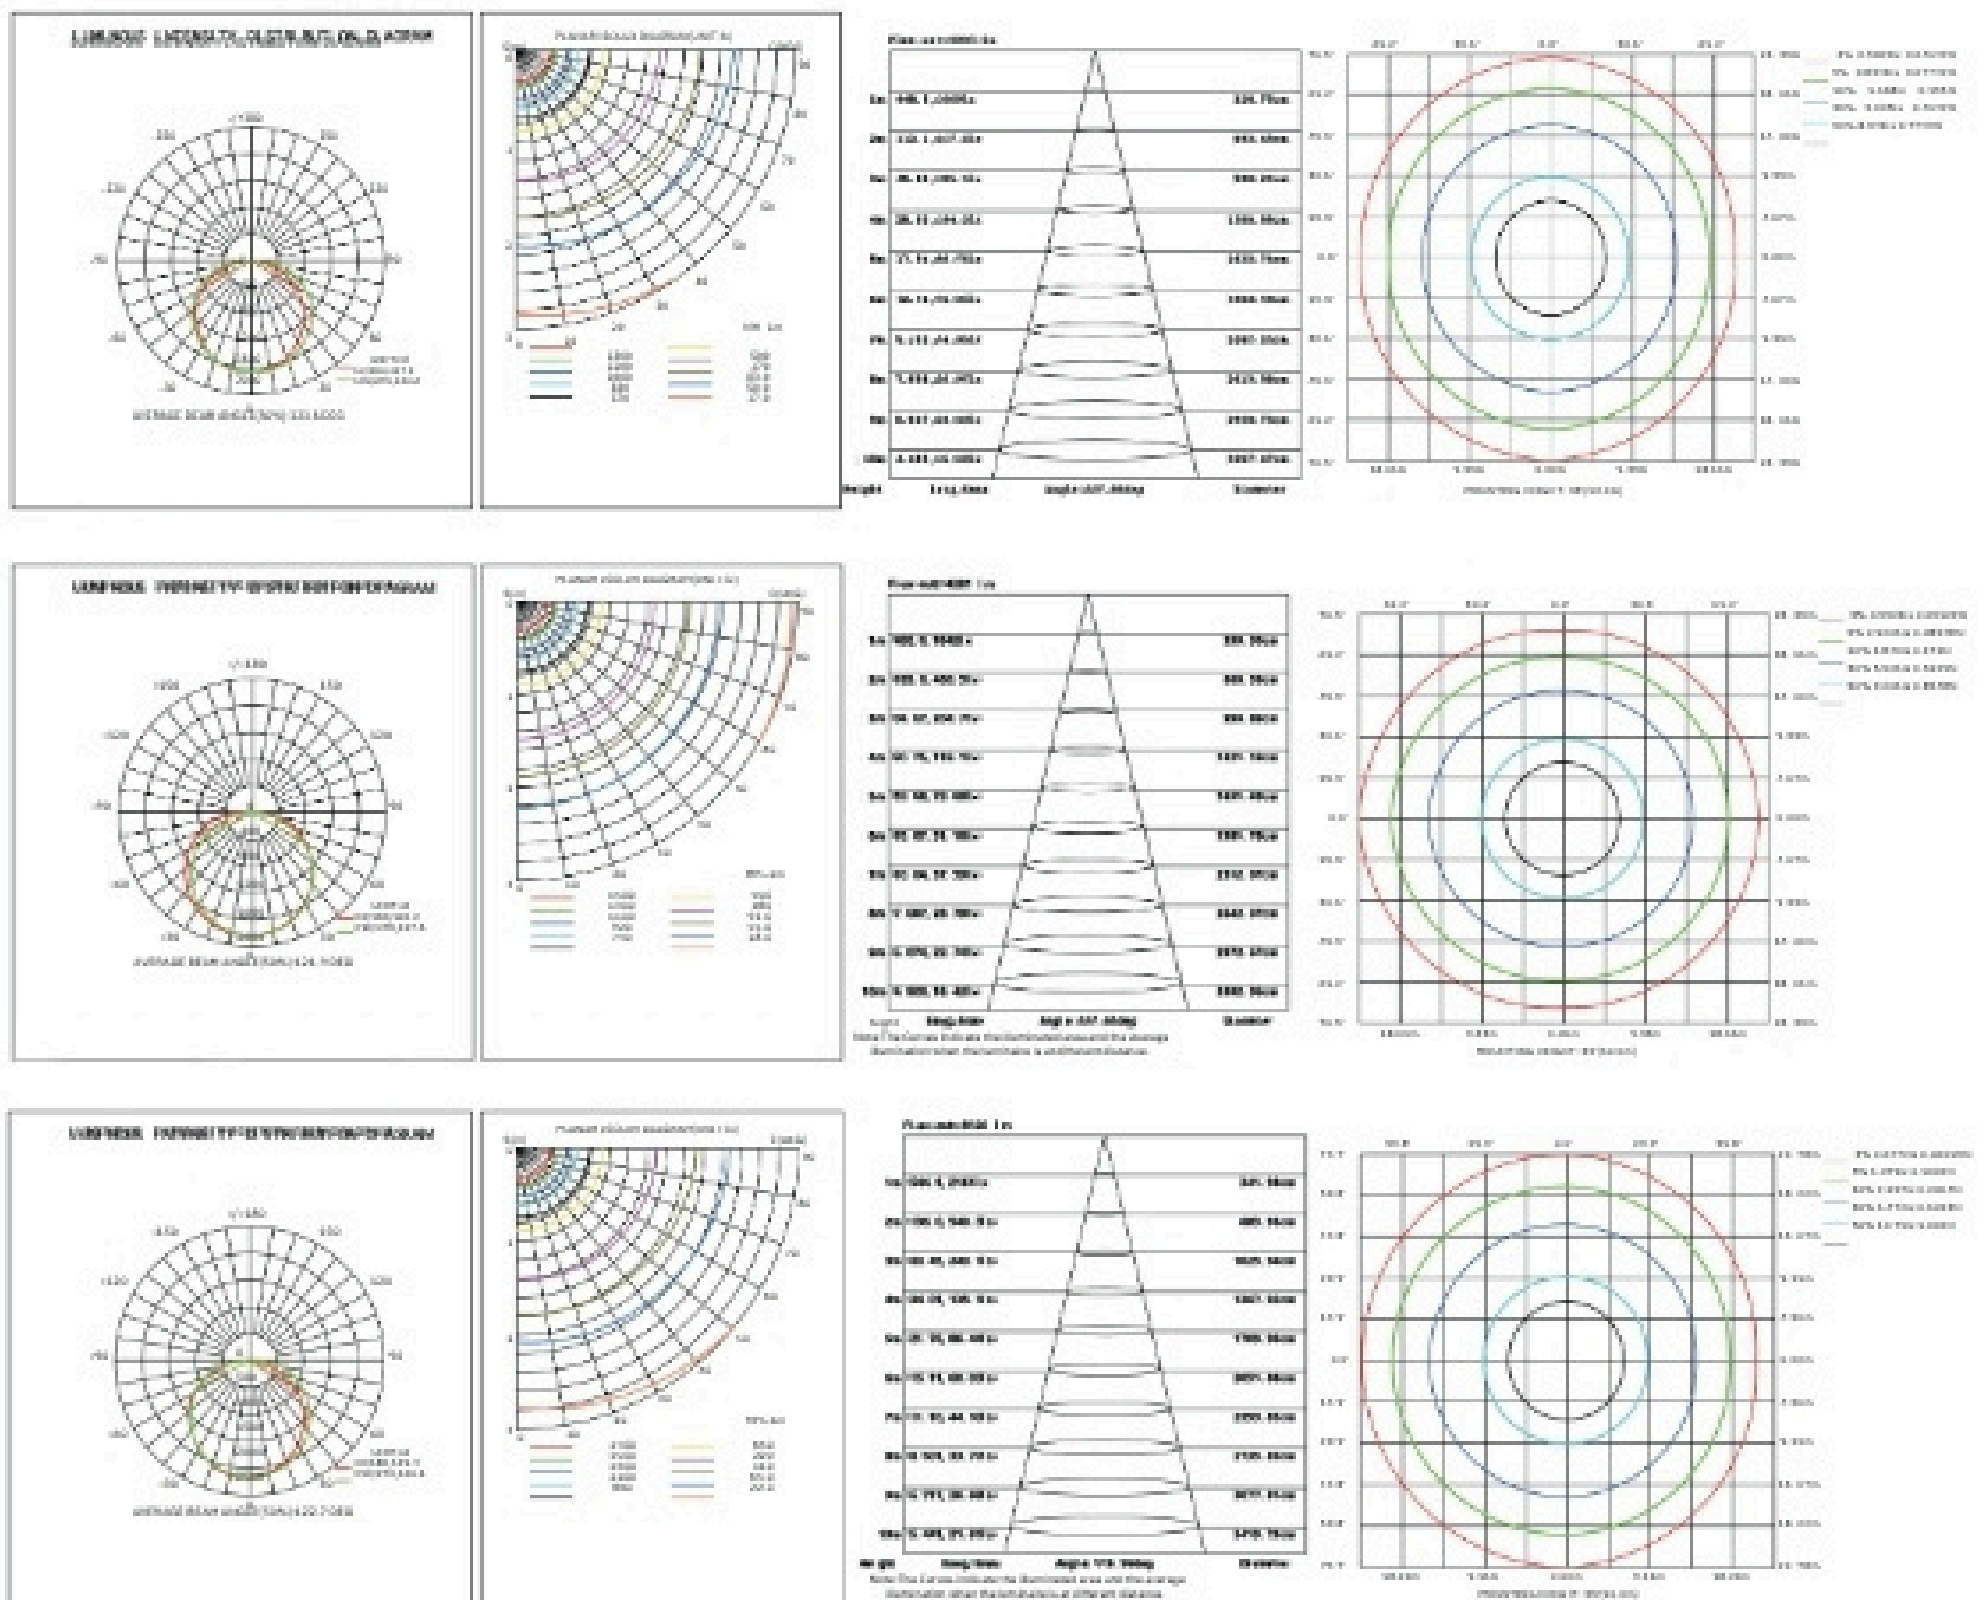

LED TROFFER LIGHT

WATTAGES: 40/30/25/20/15W, 50/40/35/30/25W Tunable

Application

