

LED TRACK LIGHT(TL04)

Wattages: 10W, 20W, 30W



Support Halo/Juno exchangeable adapter.
90+CRI with 3-step MacAdam Ellipse.
High-Efficacy with precise Center Beam
Candle Power, can pivot +/-90° vertically.

Recommended Application: Retailers,
Supermarkets, Restaurants, Shopping Mall,
etc.



PRODUCT FEATURES:

- 110LPW & Triac dimming for single CCT and wattage.
- 90LPW & Non-dimmable for CCT & wattage selectable.
- Daisy connection with very convenient replacement in 1 minute.
- Single voltage: AC120V.
- Available with suspending installation and surface-mounted installation.
- 20°-50° Beam Angle for variety choices.
- 5 years warranty.

SPECIFICATION


WATTAGE	10W	20W	30W	20/15/10W	30/25/20W
CCT	2700K,3000K,3500K,4000K,5000K			2700K,3000K,3500K,4000K,5000K Tunable	
EFFICACY	Up to 110LPW			Up to 90LPW	
CRI	Ra >90				
INPUT VOLTAGE	AC120V				
DISTRIBUTION	20-50° Zoomable				
POWER FACTOR	0.9				
DRIVER EFFICACY	87%				
LIFE SPAN	over 50,000 hrs				
WORKING TEMPERATURE	-40°F~104°F				
STORAGE TEMPERATURE	-40°F~176°F				
WARRANTY	5 year limited				

LED TRACK LIGHT(TL04)

Wattages: 10W, 20W, 30W


Adapter:

- Compatible with H-type track adapter, J-type track adapter, suitable for all your projects requirements.
- H type and J-type track adapter are interchangeable

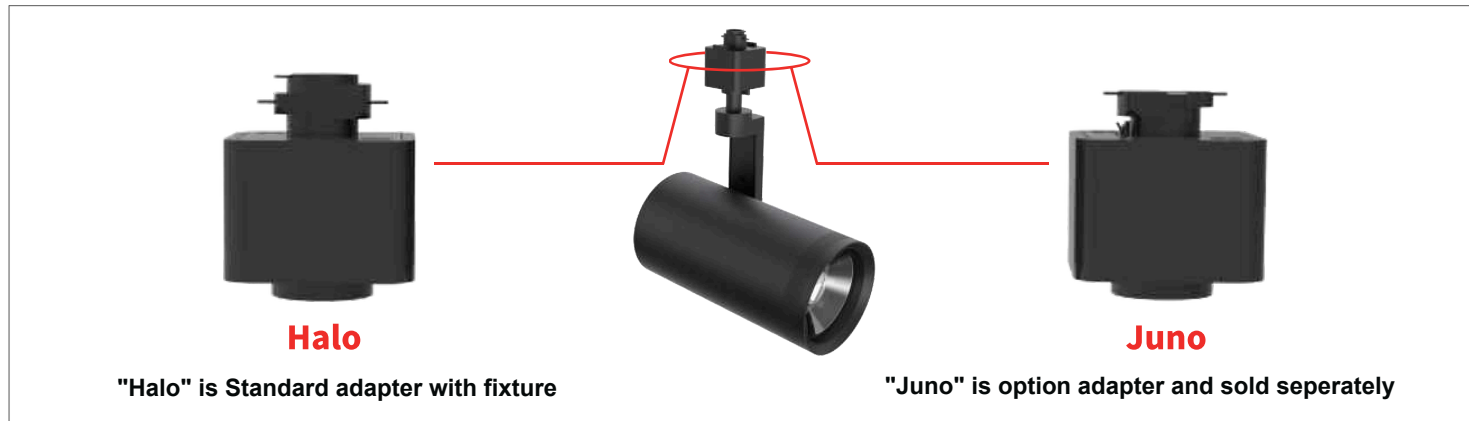

Luminaire Arm:

- 180° tilt and 350° rotation adjustable

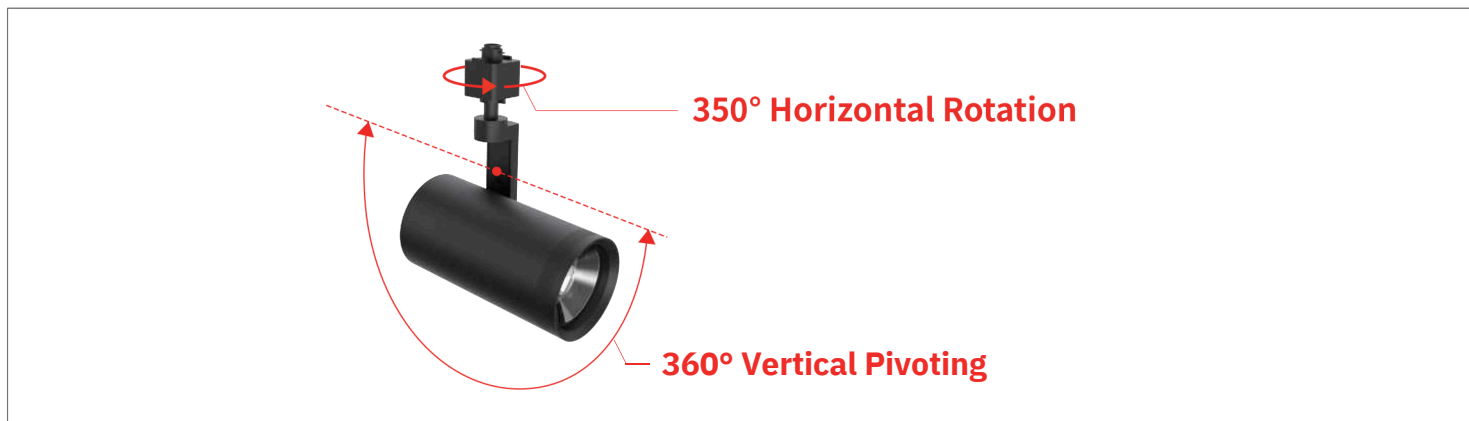

Beam angle:

- Zoomable track light heads 20° - 50° adjustable to meet different application requirements



Application:


- Recommended Use for Retailers, Supermarkets, Restaurants, Shopping Mall, Grocery, Hospitality, Commercial, Residential, Exhibit etc.

LED TRACK LIGHT(TL04)


Wattages: 10W, 20W, 30W

PRODUCT DIMENSION:


10W






20W | 20/15/10W



30W | 30/25/20W



	Inner packing size (1 pcs/ctn)	Outer packing size (20pcs/ctn)	N.W. (1pcs/ctn)	G.W. (1pcs/ctn)	N.W. (20pcs/ctn)	G.W. (20pcs/ctn)
	L4.17"xW3.5"xH10.2"	L18.5"xW17.68"xH10.98"	1.59Lbs	2.09Lbs	31.75Lbs	43.65Lbs
	L4.17"xW3.5"xH10.2"	L18.5"xW17.68"xH10.98"	1.59Lbs	2.09Lbs	31.75Lbs	43.65Lbs
	L5"xW4.29"xH11.14"	L22.17"xW20.91"xH11.93"	2.60Lbs	3.11Lbs	52.03Lbs	64.82Lbs
	L4.17"xW3.5"xH10.2"	L18.5"xW17.68"xH10.98"	1.59Lbs	2.09Lbs	31.75Lbs	43.65Lbs
	L5"xW4.29"xH11.14"	L22.17"xW20.91"xH11.93"	2.60Lbs	3.11Lbs	52.03Lbs	64.82Lbs

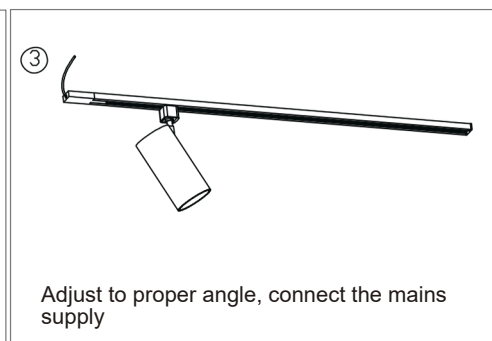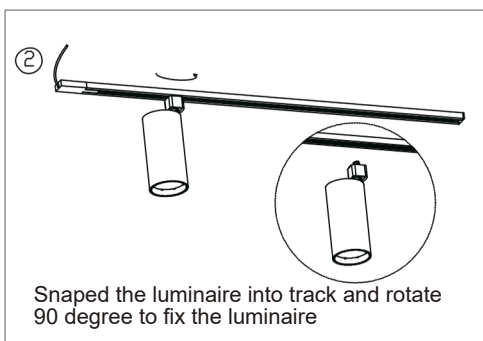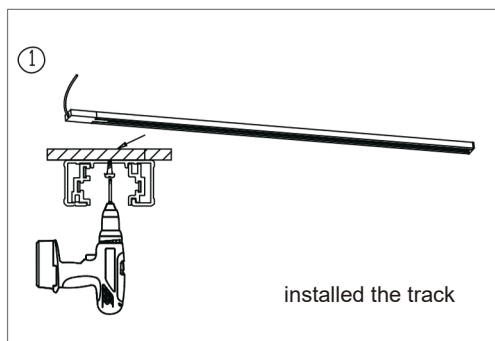


Other Installation Methods (Sold Separately)



LED TRACK LIGHT(TL04)

Wattages: 10W, 20W, 30W

Optional accessories

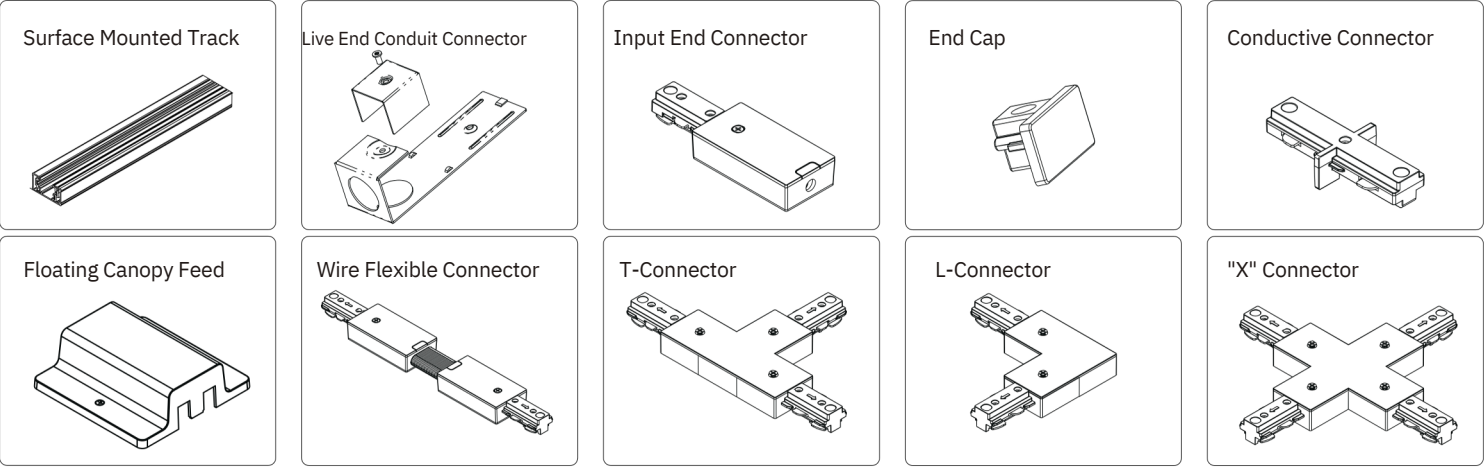


ORDERING GUIDE:

EXAMPLE:

SS-TL04- 20W-TCP-a-L-z

SS	TL04	20W	H	TCP	a	z
	PRODUCT	POWER	HIGH LUMENS	Tunable CCT and Power	Beam Angle	Finish
	L ED Track Light	10W=10W 20W=20W 30W=30W 20W=20/15/10W 30W=30/25/20W		2700K/3000K/3500K/ 4000K/5000K	2 0-50° Tunable	B=Black W=White


Rail system connection diagram:

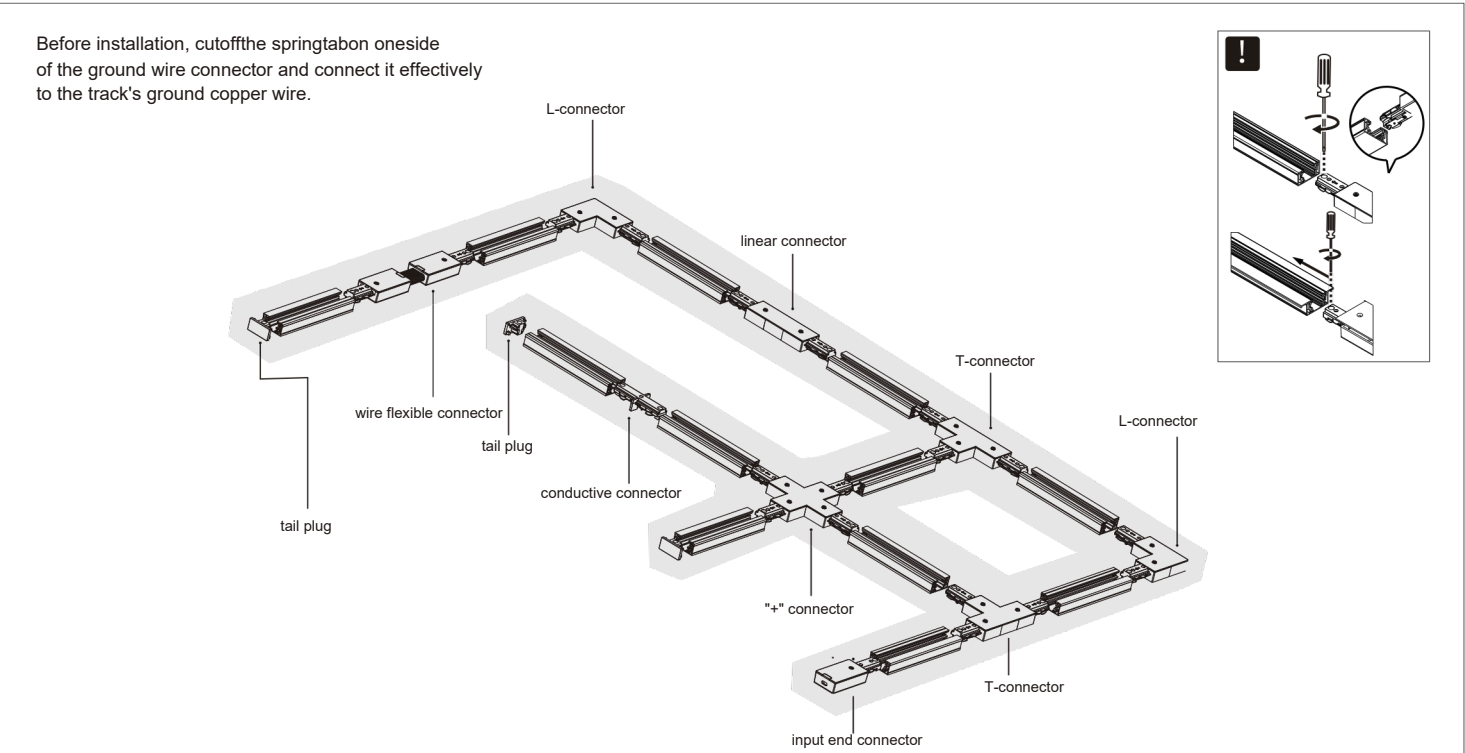

LED TRACK LIGHT(TL04)

Wattages: 10W, 20W, 30W

Applications

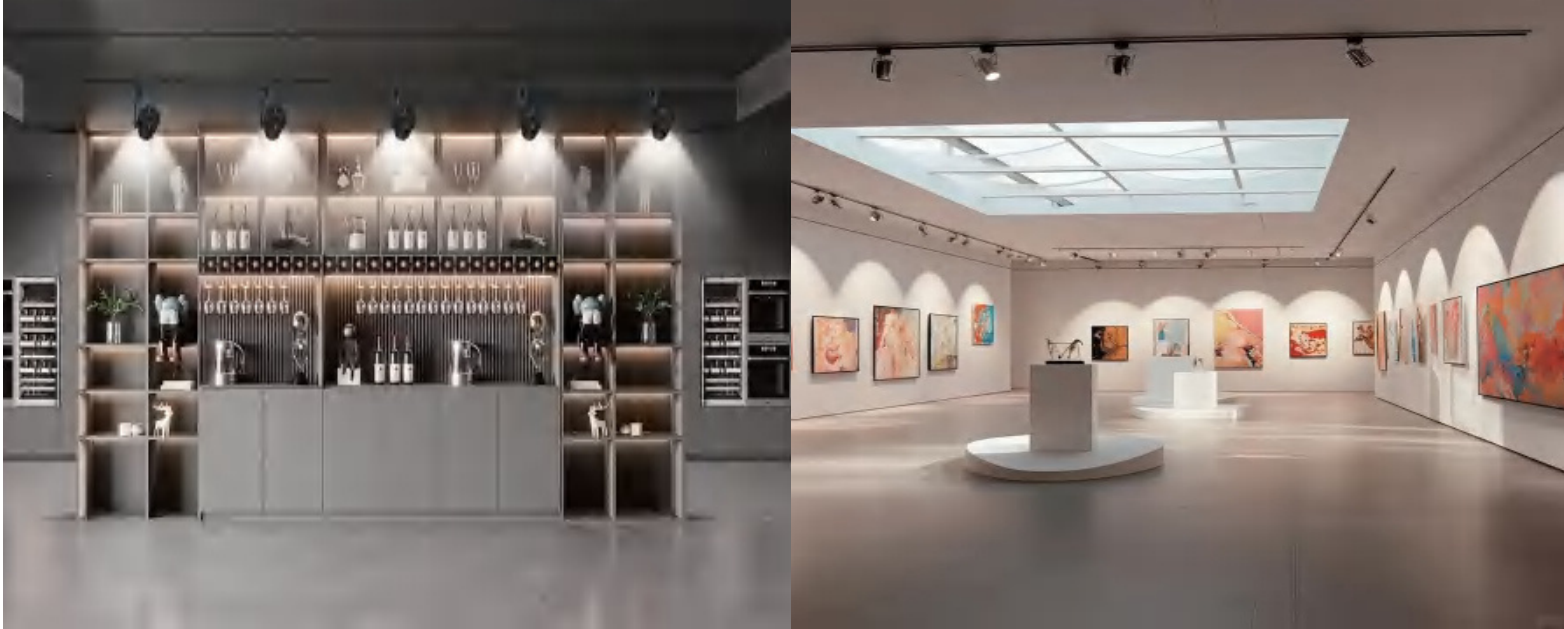

Warning:

- ⚠ Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for damp locations. Always turn off the power supply before installation.
- ⚠ Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface.
- ⚠ DO NOT exert force on the surface of the fixture.