


TUNABLE LED UFO HIGH BAY(UFO12)

WATTAGES: 150/100/80W, 200/150/100W, 240/200/150W, 300/240/200W, 500/400/300W TUNABLE



A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.



FEATURES:

- DLC 5.1 Premium with high luminous efficiency and low UGR.
- Simple and stylish appearance.
- Excellent heating dissipation.
- Branded driver and LED's.
- Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth.
- Very complete accessories for option.
- 0-10 diming.

PRODUCT PARAMETERS:


SPECIFICATION					
WATTAGE	150/100/80WTunable 22500/15000/12000	200/150/100W Tunable 30000/22500/15000	240/200/150W Tunable 36000/30000/22500	300/240/200W Tunable 42000/33600/28000	500/400/300W Tunable 70000/56000/42000
LUMEN					
EFFICACY	150LPW				140LPW
CCT	3500K/4000K/5000K Tunable				
CRI	70/80				
INPUT VOLTAGE	AC120-277V, AC120-347V, AC 277-480V				
LIGHTING ANGLE	90°				
OPERATING TEMPERATURE	-40°F~113 °F				
STORAGE TEMPERATURE	-40°F~158°F				
PF	>0.9				
DRIVER EFFICIENCY	>90%				
PROTECTION LEVEL	WET				
LIFE TIME	>50000 hours				
WARRANTY	5 year limited				

TUNABLE LED UFO HIGH BAY(UFO12)

WATTAGES:150/100/80W,200/150/100W,240/200/150W,300/240/200W, 500/400/300W TUNABLE

PRODUCT DIMENSION


● Hook type(Standard):

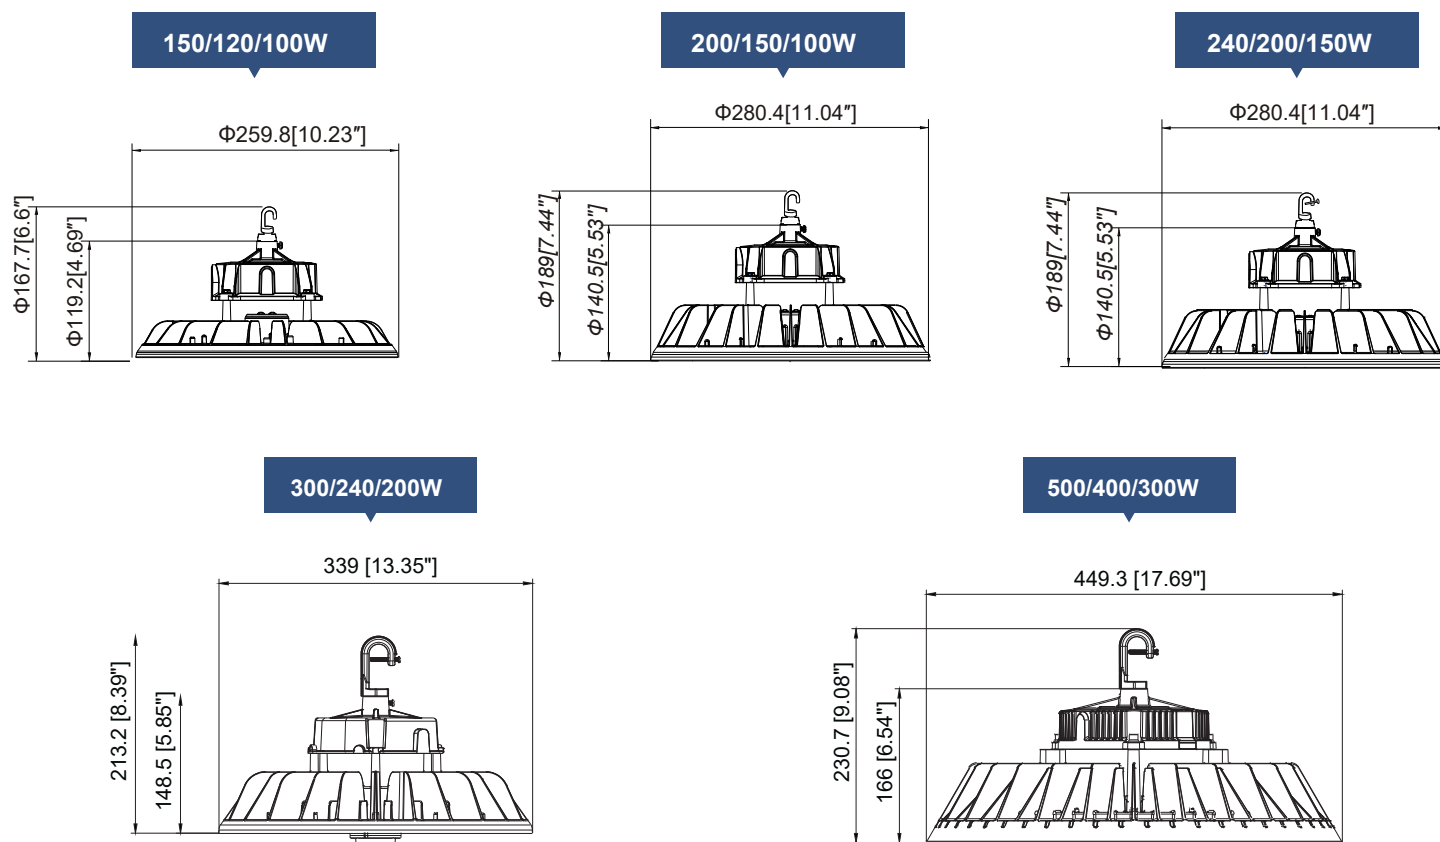


	Packing	Size	Net Weight	Gross Weight	pcs/ctn
150/100/80W	Outer Packing Size	L10.59 * W10.59 * H5.63 inch L269 * W269 * H143 mm	3.47Lbs(1.575Kg)	4.41Lbs(2Kg)	1pcs/ctn
200/150/100W	Outer Packing Size	L11.38 * W11.38 * H6.38 inch L289 * W289 * H162 mm	4.78Lbs(2.17Kg)	5.88Lbs(2.67Kg)	1pcs/ctn
240/200/150W	Outer Packing Size	L11.38 * W11.38 * H6.38 inch L289 * W289 * H162 mm	4.78Lbs(2.17Kg)	5.88Lbs(2.67Kg)	1pcs/ctn
300/240/200W	Outer Packing Size	L13.82 * W13.82 * H7.87 inch L351 * W351 * H200 mm	6.94Lbs(3.15Kg)	9.92Lbs(4.5Kg)	1pcs/ctn
500/400/300W	Outer Packing Size	L20.28 * W20.28 * H8.27 inch L515 * W515 * H210 mm	13.49Lbs(6.12Kg)	17.2Lbs(7.8Kg)	1pcs/ctn

TUNABLE LED UFO HIGH BAY(UFO12)

WATTAGES:150/100/80W,200/150/100W,240/200/150W,300/240/200W, 500/400/300W TUNABLE

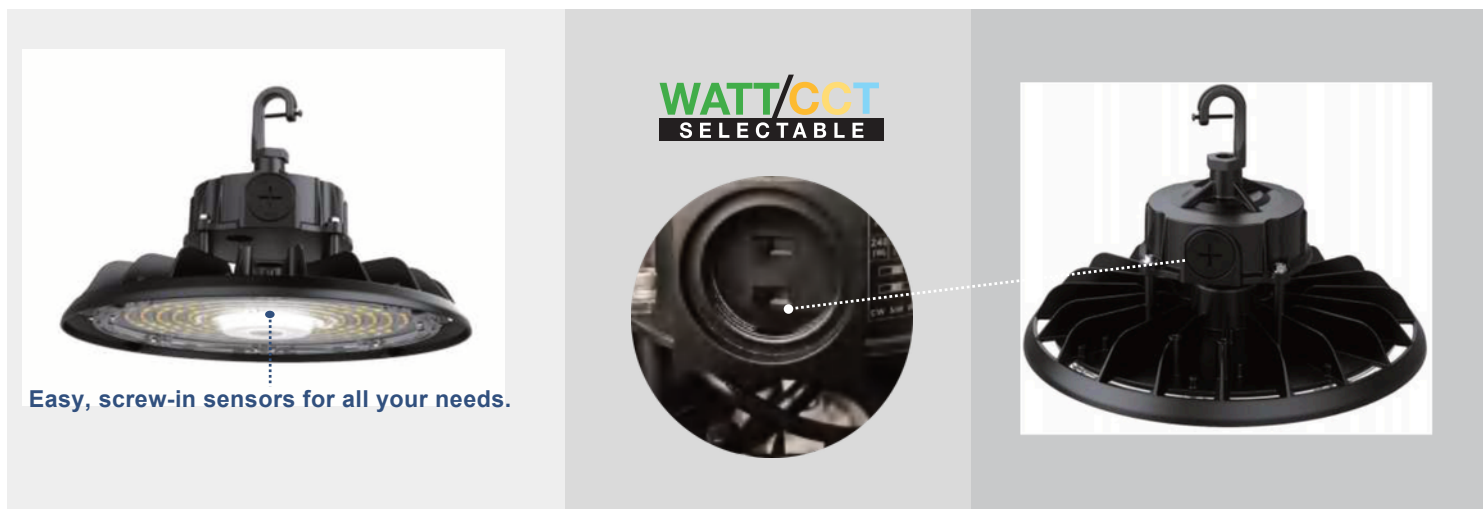

MOUNTING BRACKETS:

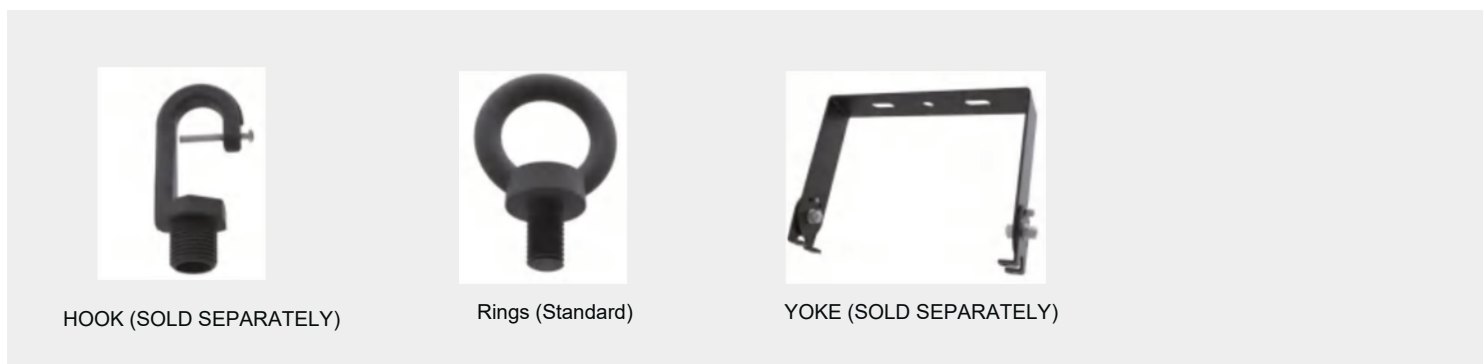

ACCESSORIES (SOLD SEPARATELY):




TUNABLE LED UFO HIGH BAY(UFO12)


WATTAGES:150/100/80W,200/150/100W,240/200/150W,300/240/200W, 500/400/300W TUNABLE

3.YOKE type:


1.Bracket fixing holes are marked on the wall, then drilling two holes on the wall by power drill, as shown in Figure1.



2.Tap two expansion bolts into the holes, as shown in Figure2.

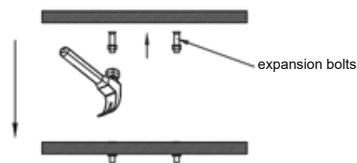


3.Put the fixture on the expansion bolt, then use a wrench to tighten the screw. as shown in Figure3.

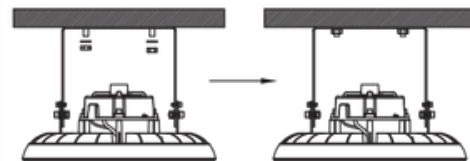


4.Sensor installation:


1.Unscrew the plug screws using screws, as shown in Figure 1.




3.Screw the sensor into the base, as shown in Figure 3.



2.Remove the plug screw, as shown in Figure 2.



4.Sensor installation, as shown in Figure 4.




WIRING CONNECTION:

Turn off the power, connect AC wire. Black wire to L, white wire to N, and green wire to PE.

Dimmer connection (with dimmable driver.)

1. Compatible with 0-10V dimming.

2. Connect wires as below, Pink 0-10V Dimming purple wire is D+, pink wire is D-, cap red wire.

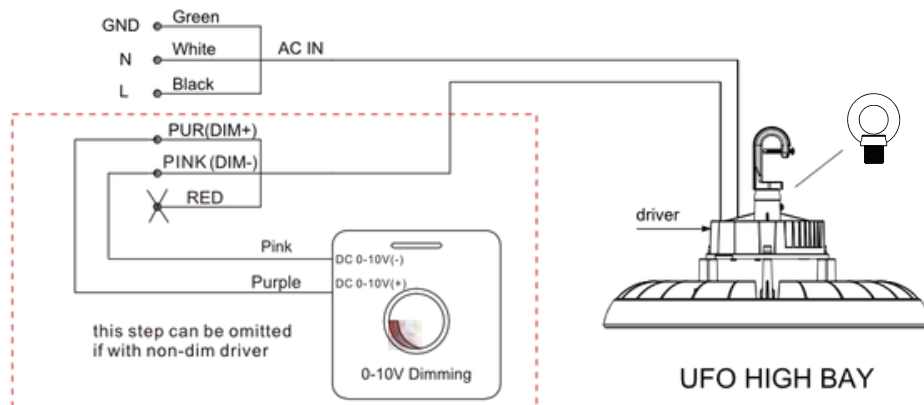

ORDERING GUIDE:

EXAMPLE:

SS-UFO12-150W-H-TCP-[A,B,C,D,blank]

SS	UFO	150W	H	xx	TCP	Y
	PRODUCT UFO Highbay	POWER	HIGH LUMENS	INPUT VOLTAGE	CCT	CONTROL
		150=150/100/80W 200=200/150/100W 240=240/200/150W 300=300/240/200W 500=500/400/300W		Blank=120-277Vac MV=120-347Vac HV=277-480Vac	TCP = adjust color temperature and wattage.	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Blank: no provide sensor


TUNABLE LED UFO HIGH BAY(UFO12)

WATTAGES: 150/100/80W, 200/150/100W, 240/200/150W, 300/240/200W, 500/400/300W TUNABLE


INSTALLTION INSTRUCTION:

1.Rings type:


1.Lock the ring.



2.Tighten the screw. (This step can be omitted if there is no screw hole.)




3.Hang up the light.




2.Hook type:


1.Lock the hook.




2.Tighten the screw. (This step can be omitted if there is no screw hole.)



3.Hang up the light.




4.Lock the screw.




DISTRIBUTION

SS-UFO12-150W-H-TCP-[A,B,C,D,blank](150W-5000K)

For complete IES files, please visit our website.

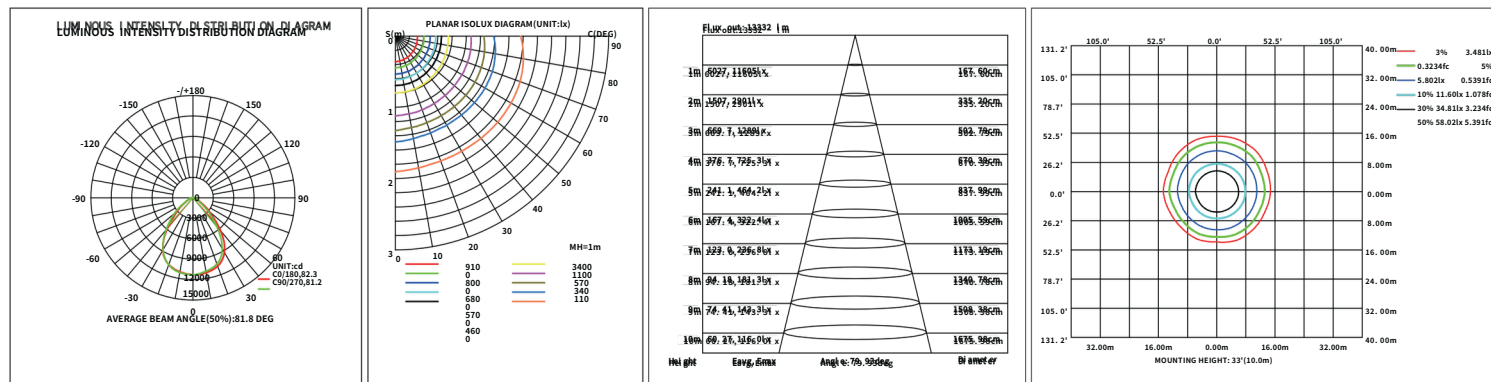


SS-UFO12-200W-H-TCP-[A,B,C,D,blank](200W-5000K)

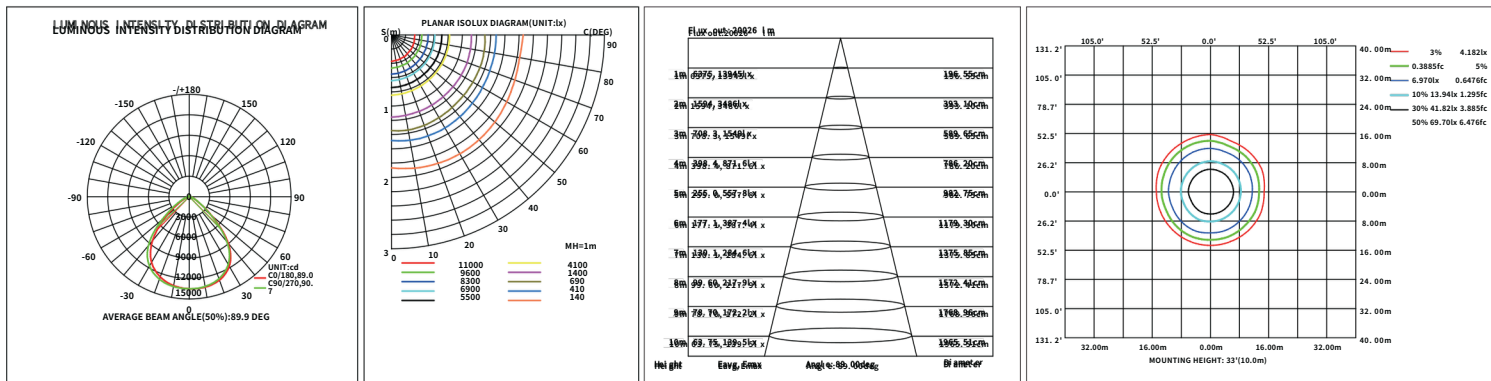


TUNABLE LED UFO HIGH BAY(UFO12)

WATTAGES:150/100/80W,200/150/100W,240/200/150W,300/240/200W, 500/400/300W TUNABLE


SS-UFO12-240W-H-TCP-[A,B,C,D,blank](240W-5000K)

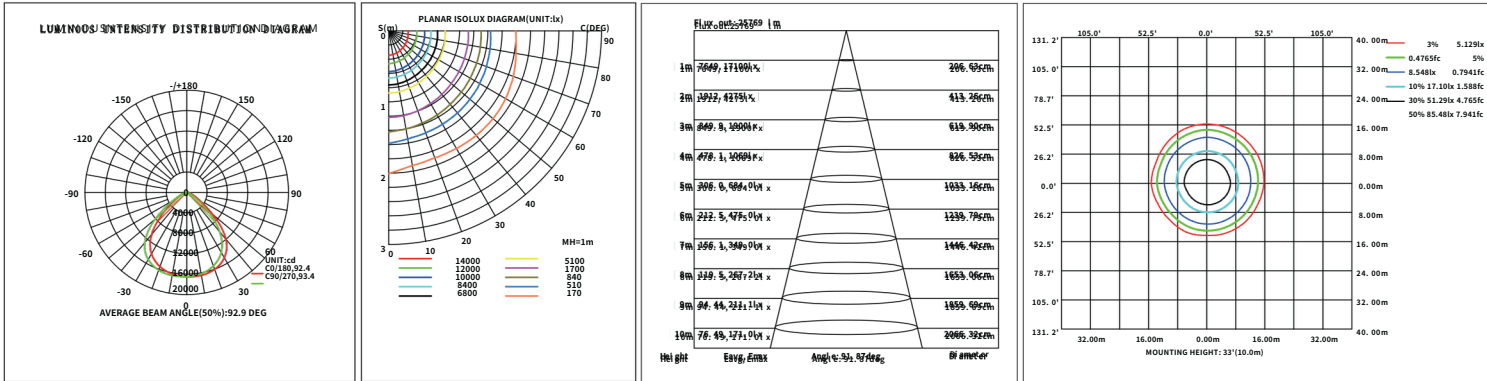

SS-UFO12-300W-H-TCP-[A,B,C,D,blank](300W-5000K)

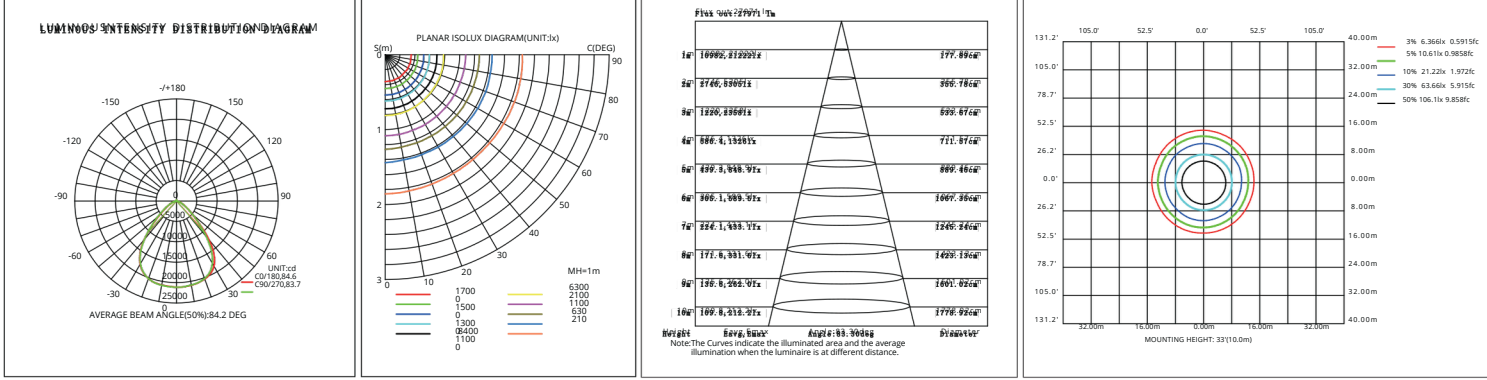

SS-UFO12-500W-H-TCP-[A,B,C,D,blank](500W-5000K)

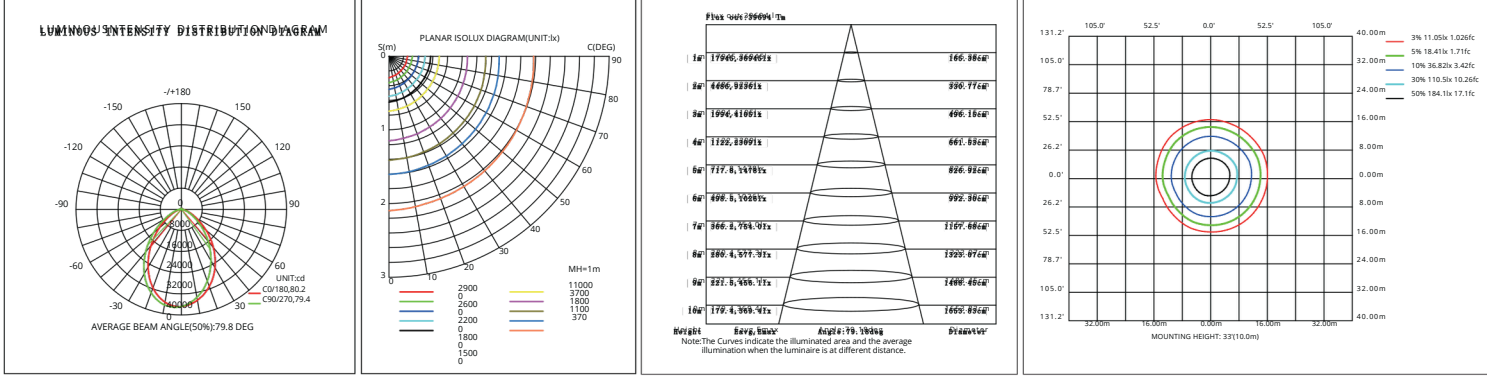

APPLICATIONS:

