LED WALL PACK LIGHT

Wattages: 40/30/20W,60/40/30W,80/60/40W, 100/80/60W, 120/100/80W Tunable



The Lumens Depot LED Wall Pack Light features a traditional mounting design for easy installation, delivering reliable and efficient lighting for a wide range of commercial and outdoor applications.





Product Features:

- Aesthetic,utilityappearance, and patented;
- High transmittance anti UVPC lens.
- Low-voltage light control sensor can be installed, which is safe and reliable;
- Power and CCT selective are available to meet the different needs of customers and reduce the inventory pressure ;
- Easy and fast installation , and traditional junction box installation method is retained;
- IP65, completely waterproof and dustproof;
- 120-277V / 0-10V and 120-347V /277V-480V，0-10V dimming power supply are available.

SPECIFICATION					
WAT TA G E	40W;40/30/20W Tunable	60W;60/40/30W Tunable	80W;80/60/40W Tunable	100W;100/80/60W Tunable	120W;120/100/80W Tunable
EFFICACY	Up to 140LPW				
CCT	3000K/4000K/5000K Tunable				
CRI	Ra 70				
INPUT VOLTAGE	AC120-277V,AC120-347V,AC277-480V				
OPERATING TEMPERATURE	-40°F~113°F				
STORAGE TEMPERATURE	-40°F~158°F				
PF	＞0.9				
DRIVER EFFICIENCY	＞90%				
PROTECTION LEVEL	Wet Location				
LIFE TIME	＞50000 hours				
WARRANTY	5 year limited				

LUMENS DEPOT
PRO LIGHTING SOLUTION

TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


LED WALL PACK LIGHT

Wattages: 40/30/20W,60/40/30W,80/60/40W, 100/80/60W, 120/100/80W Tunable

Packing/Weight

Modell	Outber box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs （Ibs）	G.W/pcs （Ibs）	Remarks
40W/30W120W	L14.56"x W9.69"x H8.19"	1pcs/ctn	7.19Lbs	8.51Lbs	0.15M cable
60W/40W/30VV	L14.56"x W9.69"x H8.19"		7.32Lbs	8.66Lbs	
80W/60W/40W	L14.56"x V9.69"x H8.19"		7.94Lbs	9.24Lbs	
100W/80W/60W	L14.56"x W9.69"x H8.19"		8.86Lbs	10.16Lbs	
120W/100W/80W	L14.56"x W9.69"x H8.19"		8.86Lbs	10.16Lbs	

Product Dimension

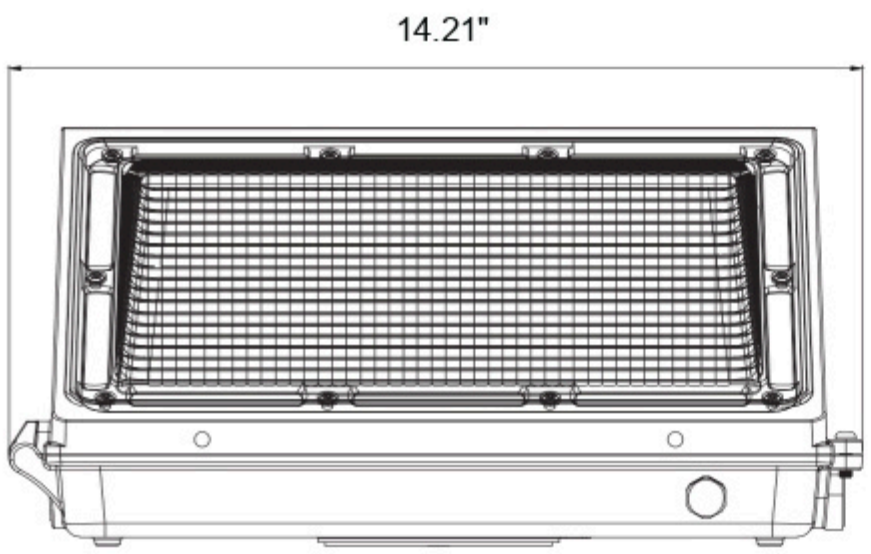

Product Accessories

ACCESSORIES MOUNTING BRACKETS




4 Pcs Screws　5 PCS Vire Nuts



1 Pcs foam

OPTIONS

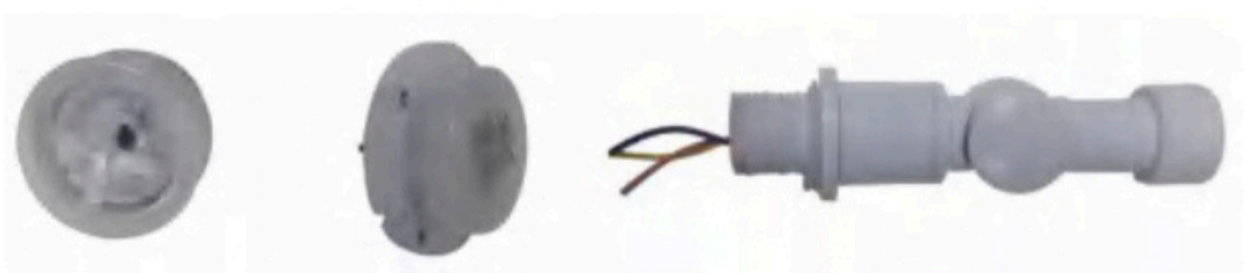

Photosensor

ANT-5-4T
ANT-6-4T


ANT-5-16B-3 (Customize)


LED WALL PACK LIGHT


Wattages: 40/30/20W,60/40/30W,80/60/40W, 100/80/60W, 120/100/80W Tunable


PHOTOMETRICS:


For complete IES files, please visit our website.

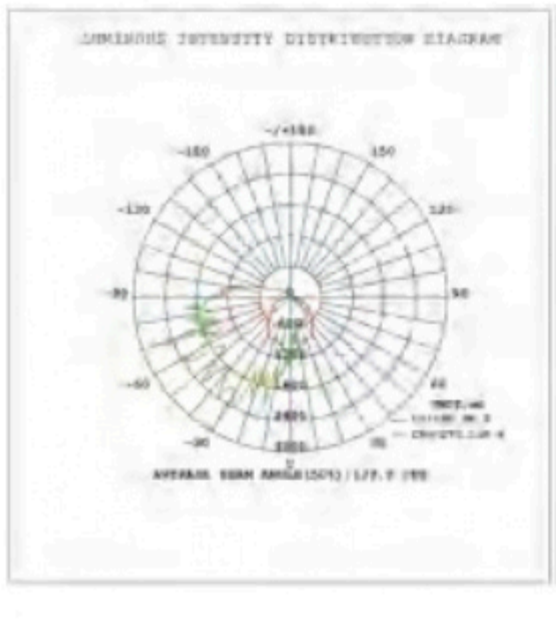


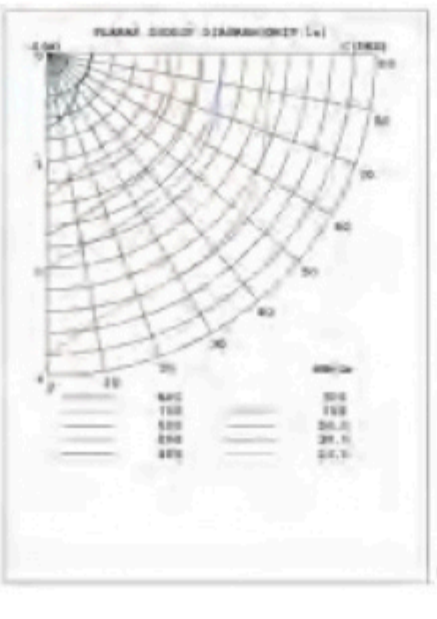


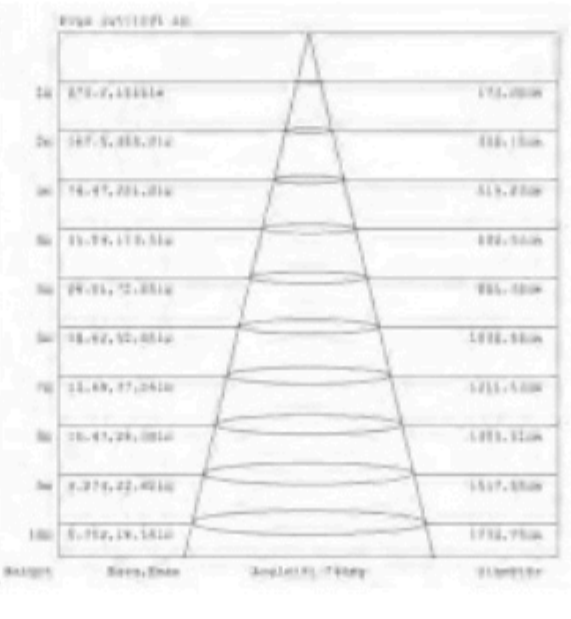


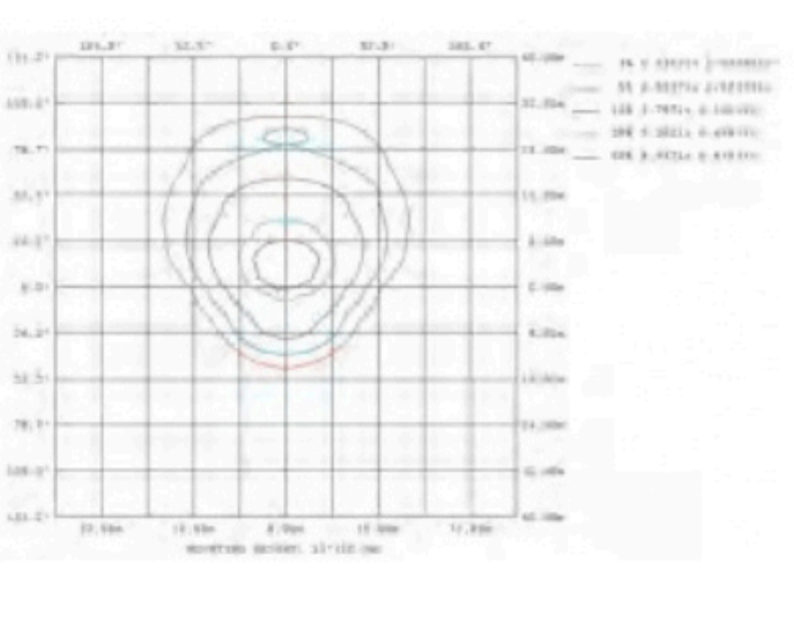


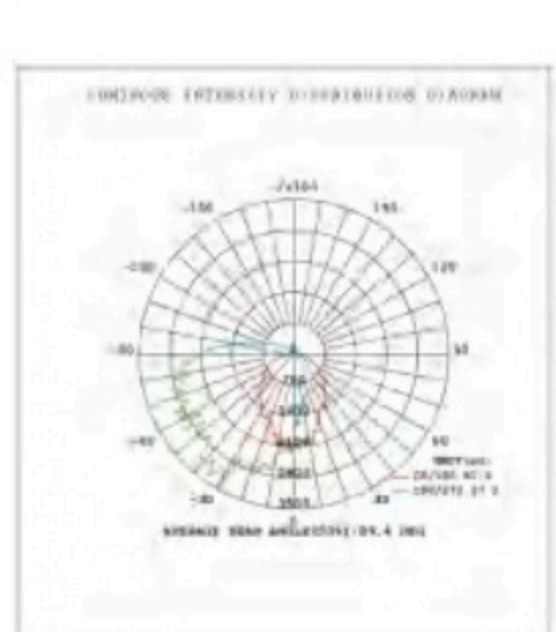


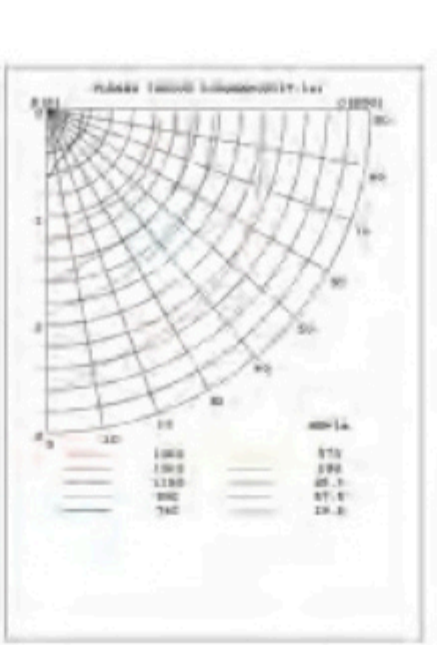


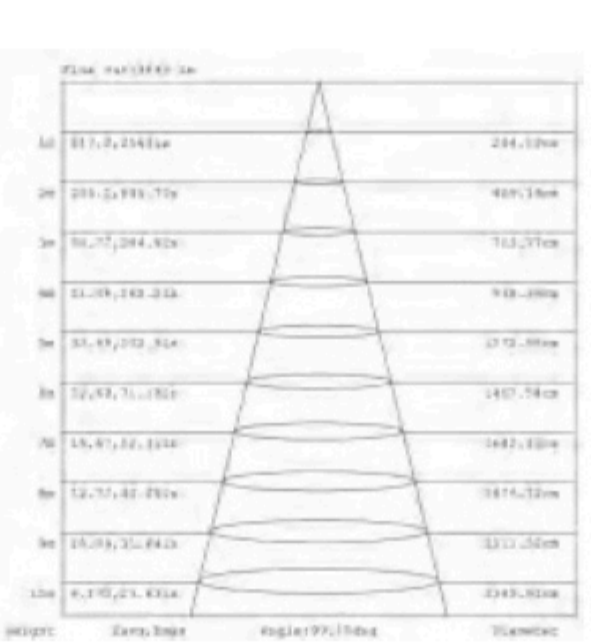


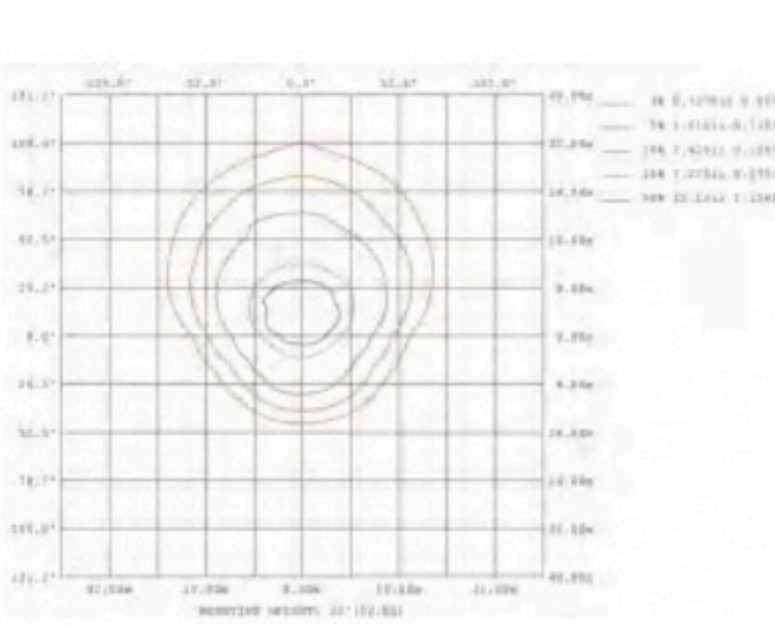

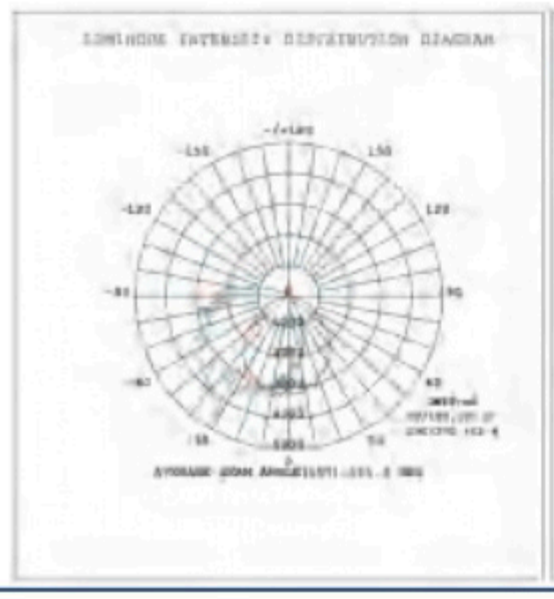

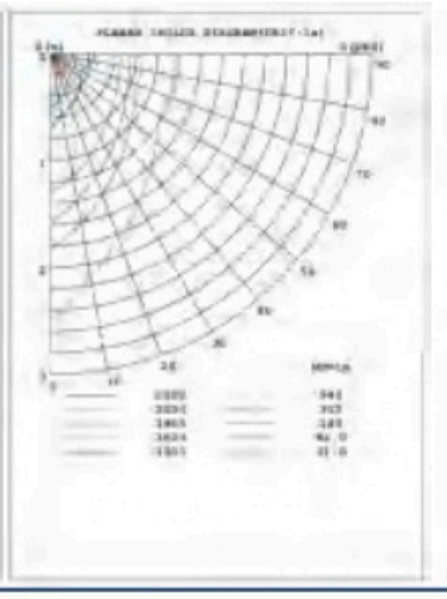

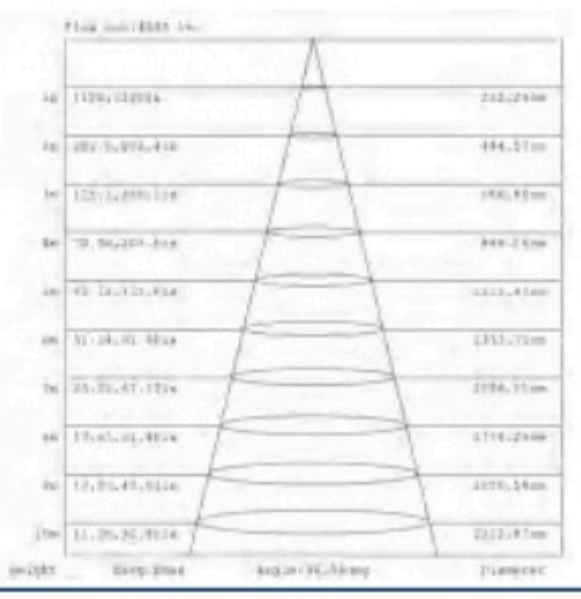

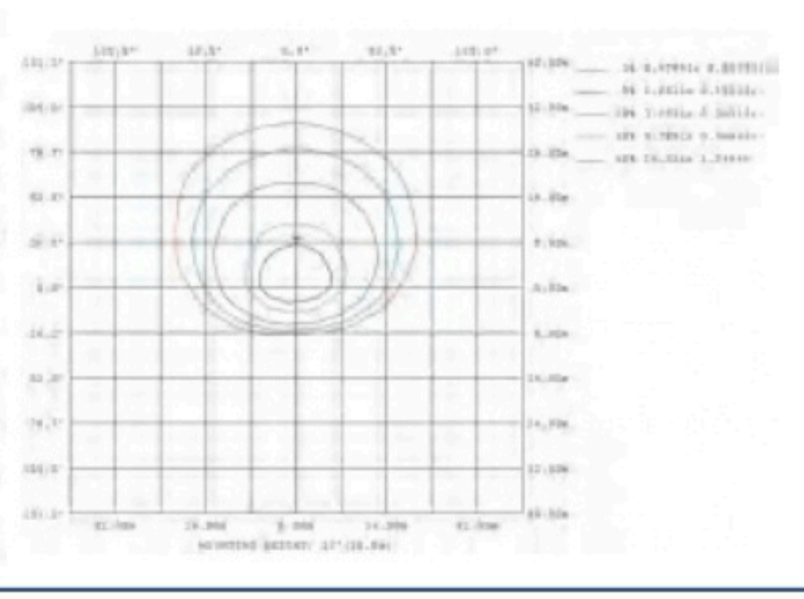


LUMENS DEPOT
PRO LIGHTING SOLUTION

TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM

ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


LED WALL PACK LIGHT

Wattages: 40/30/20W,60/40/30W,80/60/40W, 100/80/60W, 120/100/80W Tunable

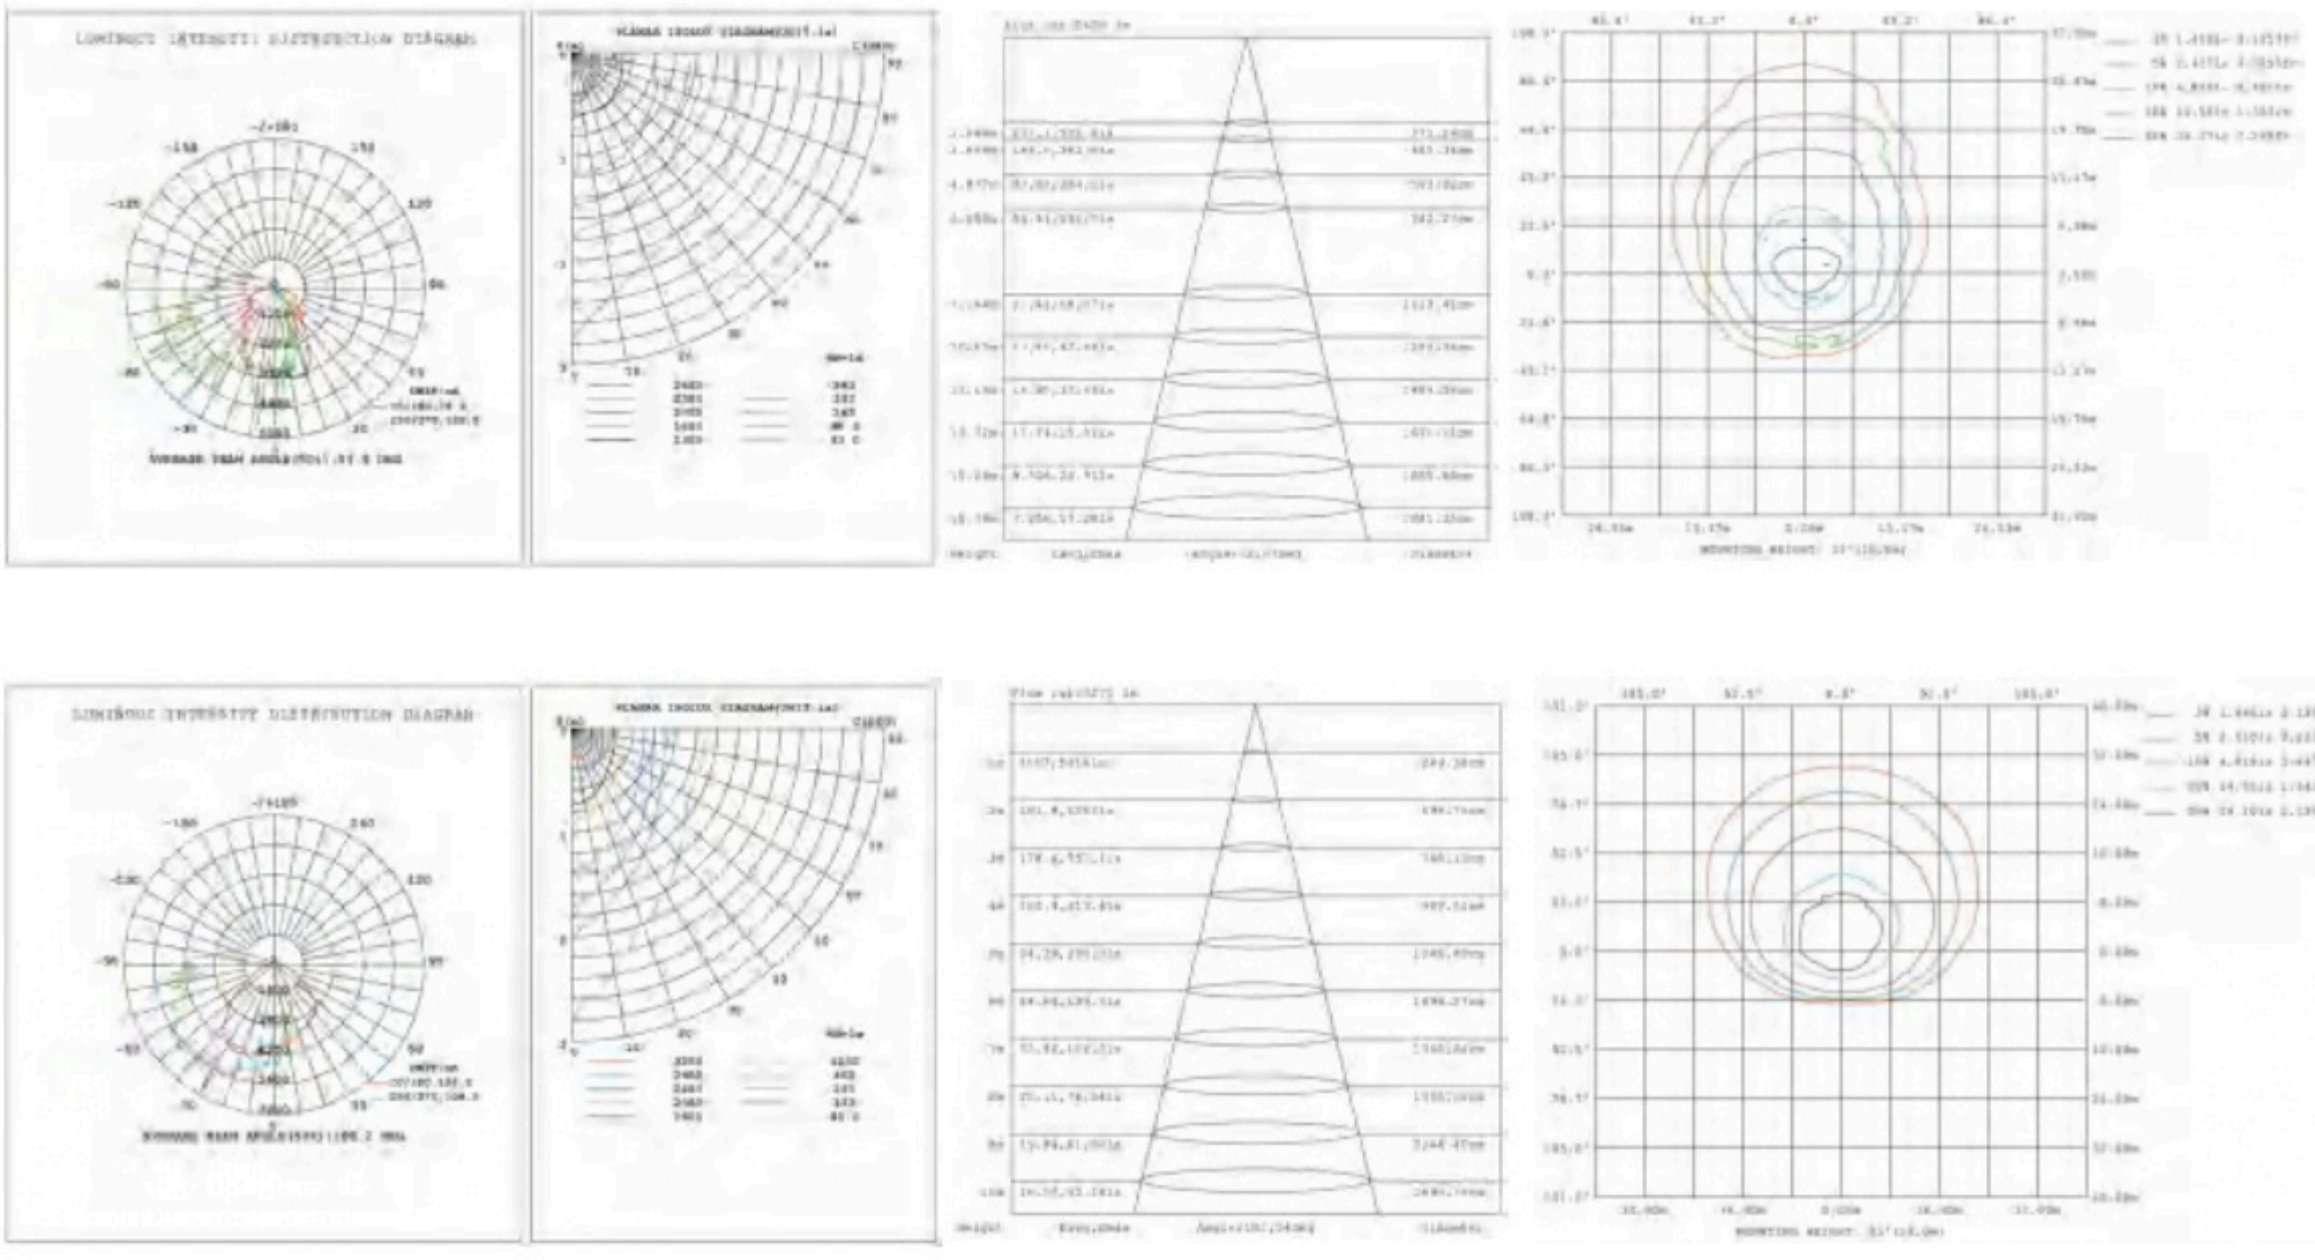


Installation Instruction


1.Use a screw driver to unscrew the lamp screws and remove the uppper half of the fixture.

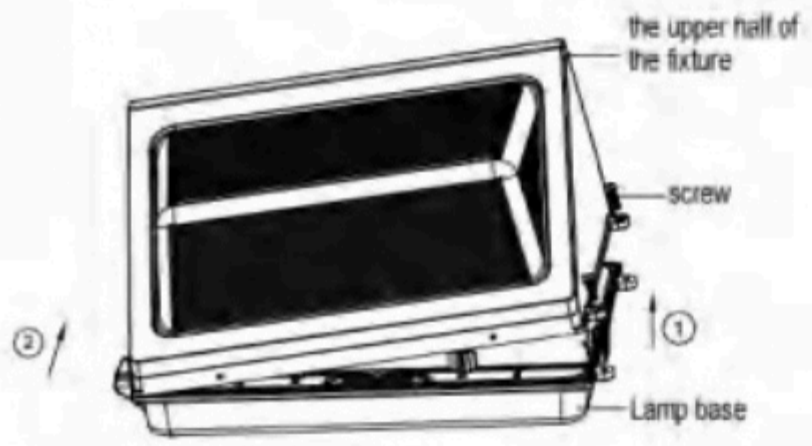


2.Unscrew the cover of the entry hole on the lamp base and remove the cover .

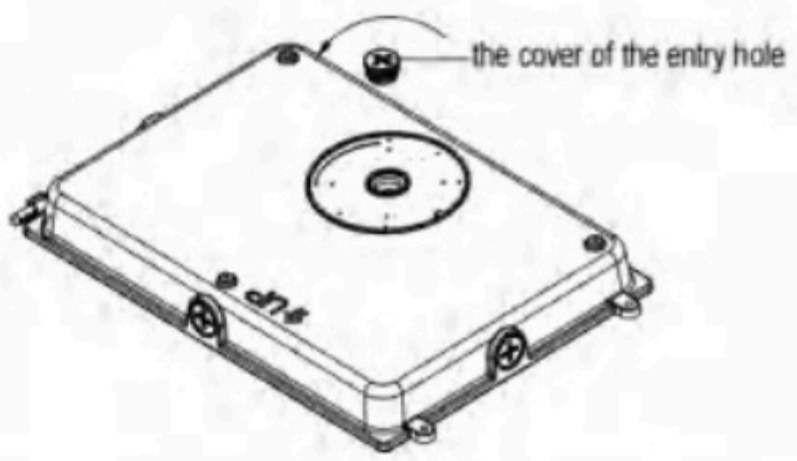

3. According to the embedded terminal box, punch the correspongding mounting hole on the light 's mount .

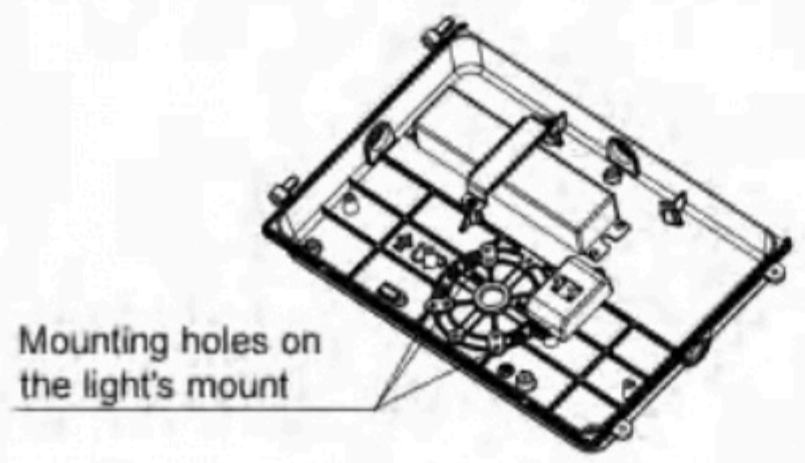

4. Put the input line in the embedded box passes through the waterproof pad and then passed through the lamp base.

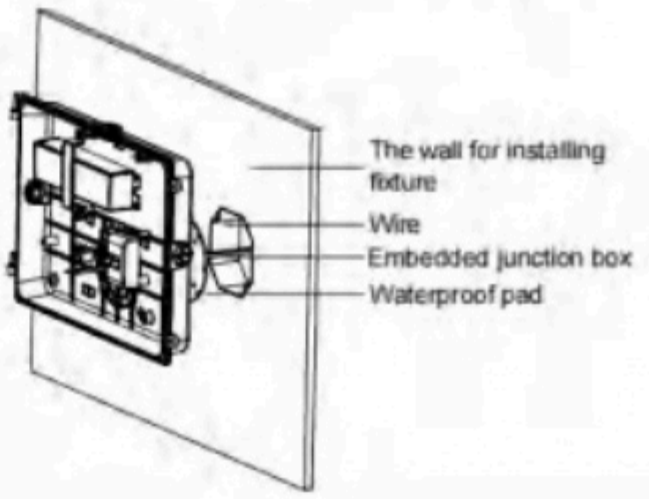


LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


LED WALL PACK LIGHT

Wattages: 40/30/20W,60/40/30W,80/60/40W, 100/80/60W, 120/100/80W Tunable


5.Use screw to lock the lamp base on the embedded junction box.

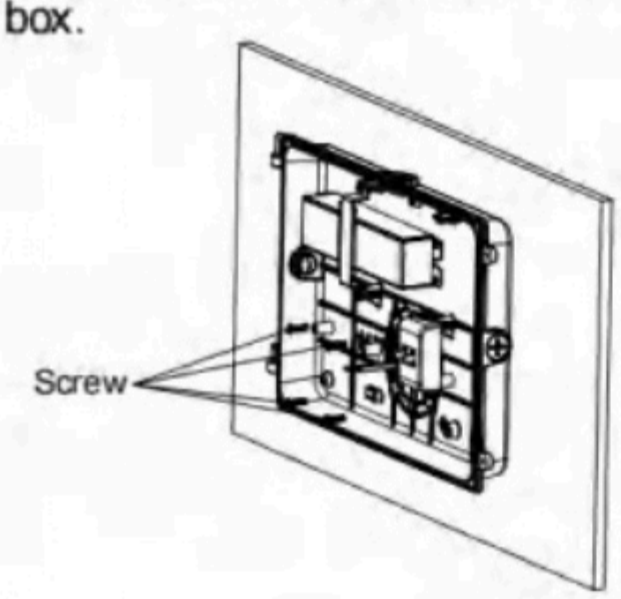


6.Connect the input wire and the dimming wire of the light , then put the connected wires into the embedded terminal box.

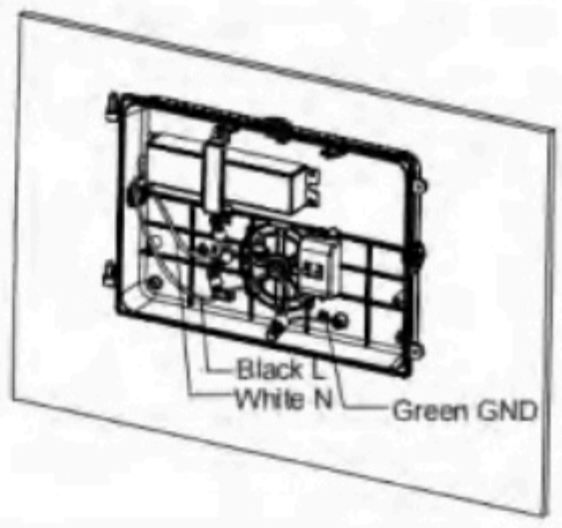


7.Connect the out put wires of driver with the wires of PCB board. Please use"Dipper Switch", to achieve“Power and CCT Tunable" function.

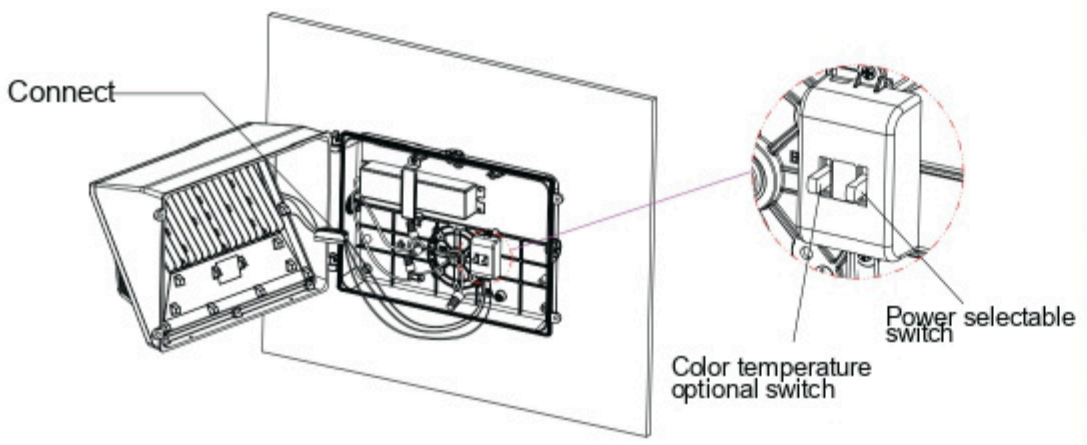

8.Use screws to lock the fixture. Installation completed.

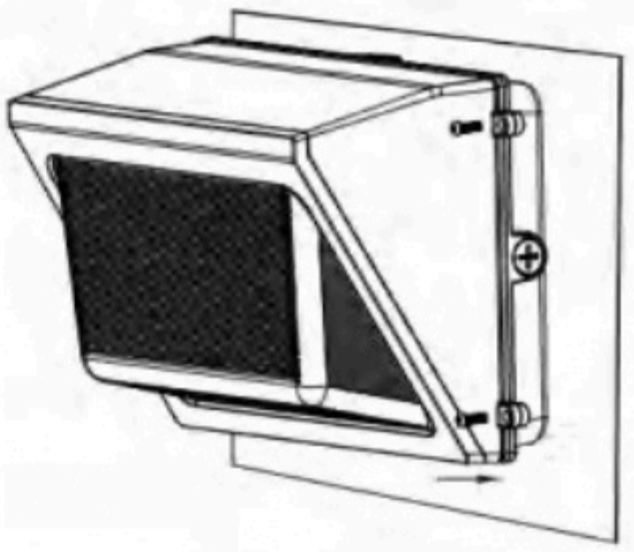

Applications:

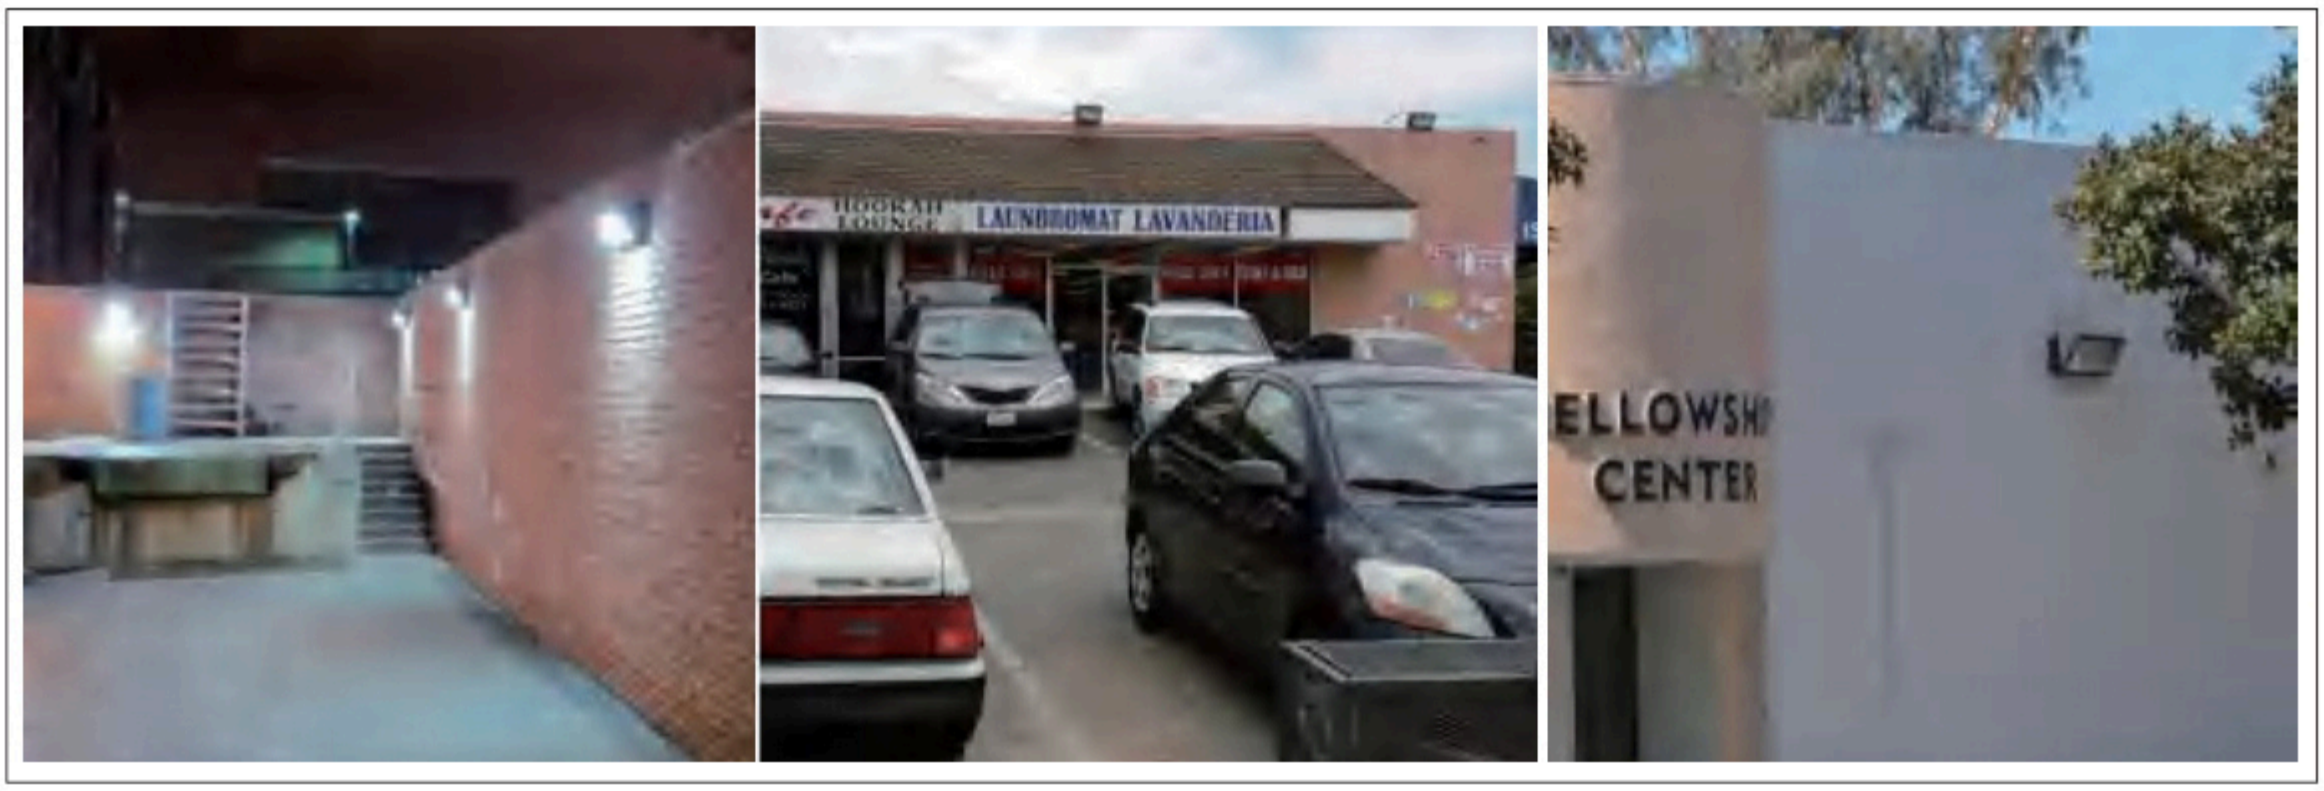

Safety Information:

1.Using the standard working voltage: AC120~277V / AC120~347V / AC277-480V,50/60Hz, do not exceed.
2.Be sure the power supply is turned off before installation.
3.Switch off power of the mains supply or the connection lead respectively before doing any works.
4.Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
5.Directly fix bolts on the installation stem through the hole on the mounting bracket.
6.Please read the specification carefully before installation.
7.The complete installation must be handled by an electrical expert.

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA