

# LINEAR HIGHBAY LIGHT



Lumens Depot Foam's LED Linear High Bay is a cutting-edge lighting solution designed to deliver a soft, sky-like illumination effect for warehouses and high-ceiling retail environments. Featuring a specialized diffuser, this ultra-thin, glare-free fixture enhances visibility and focus while providing uniform, high-quality lighting across large spaces. Ideal for ceiling heights up to 20 feet, it delivers powerful lumen output while maintaining energy efficiency, making it perfect for areas that require bright and consistent illumination. Its sleek, ultra-thin design combines a durable aluminum housing with a high-quality lens and diffuser to evenly distribute light while minimizing glare. Equipped with 1–10V dimming functionality, it allows flexible control over light intensity to improve energy savings and user comfort. It also supports an optional plug-and-play motion sensor for intelligent, occupancy-based lighting control. With multiple mounting options, including chain mounting, installation is simple and secure. UL listed and backed by a 5-year warranty, this linear high bay is a dependable and energy-efficient lighting solution for warehouses, industrial facilities, and retail spaces.

## Product Features

- Up to 80 lm/W
- 320 Watt
- CCT 6500K
- 1-10V Dimmable
- 90° Beam Angle
- Ultra-thin, sleek design
- Galvanized sheet
- White housing
- PMMA lens with cloud diffuser
- Optional plug & play motion sensor
- Standard chain mount
- Input voltage 120-277VAC
- UL listed
- 5-year warranty

# LINEAR HIGHBAY LIGHT


WATT	MAX LUMENS	CCT	INPUT VOLTAGE	CRI	SIZE	LIGHT SPREAD	CONSTRUCTION	DIMMING	CERTIFICATIONS
320W	25000	6500K	120-277V	>80	4'	90°	Galvanized Sheet	1-10V	UL

## Specifications


Parameter	Description	Value
General Performance	Model #	BLT-PHB07-320WBFW1A1-WH65
	Watt	320W
	Max Lumens	25000LM
	Lumen Efficacy	Up to 80LM/W
	Color Temperature	6500K
	CRI (Ra)	>80
	Light Spread	90°
Electrical	Diffuser Type	PMMA Lens
	Input Voltage	120-277Vac
	Frequency	50/60Hz
	Dimming	1-10V
	Power Factor	≥0.9
	Driver Surge Protection	L-N : 2KV. L/N-PE : 4KV
Physical	Flicker Percent	No Flickering
	Operating Temperature	-40°C To 50°C
	Operating Humidity	20%-90%RH
	Storage Temperature	-40°C To 80°C
	Storage Humidity	10% - 95% RH
	LED Brand	Lumileds
	LED Type	SMD 2835 (0.5W)
Qualification	LED QTY	1215 PCS
	Construction	Lamp Body Material Galvanized Sheet
	Housing Color	White
	IP Rating	IP20
Warranty	5 Years	

# LINEAR HIGHBAY LIGHT

## Correlated Color Temperature (CCT)

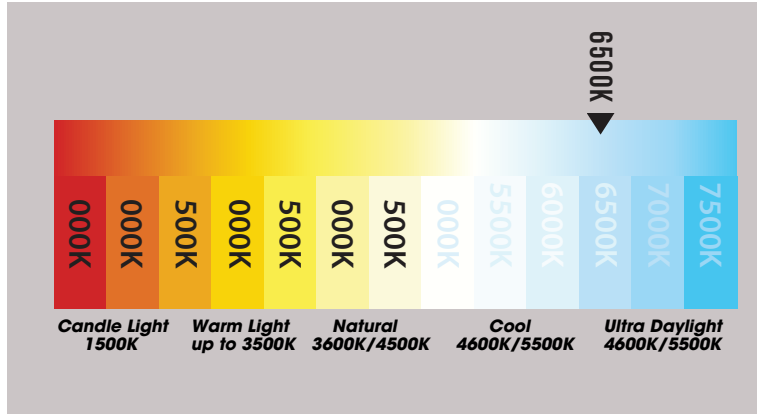

## Dimensions

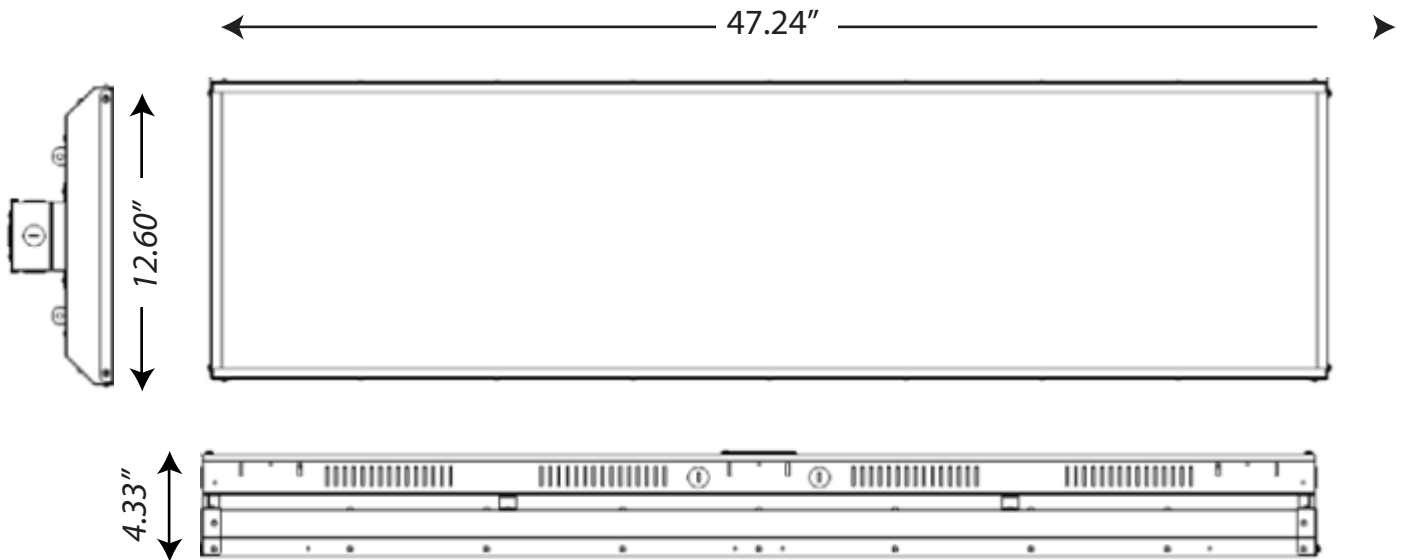

## Accessories




Type A



Type B



Type C




Type D


# LINEAR HIGHBAY LIGHT

## Photometric Result

### Luminous Intensity Distribution Curve

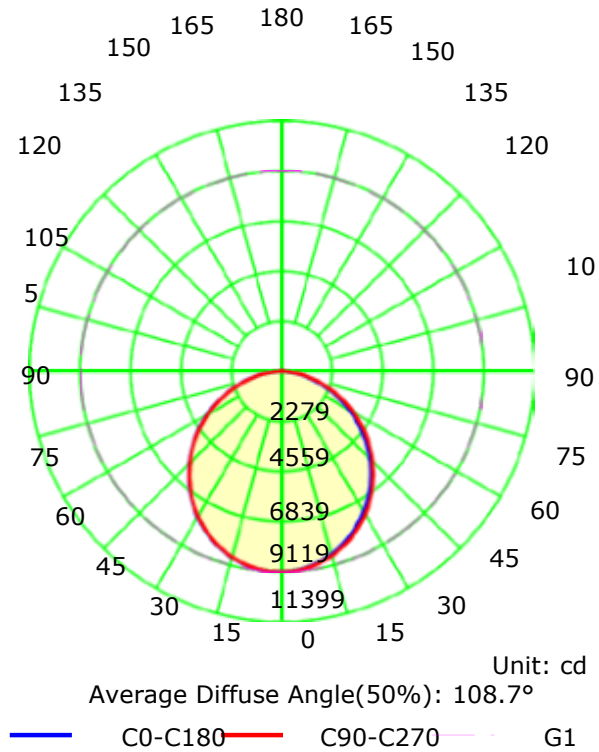


### Luminous Intensity Distribution Curve

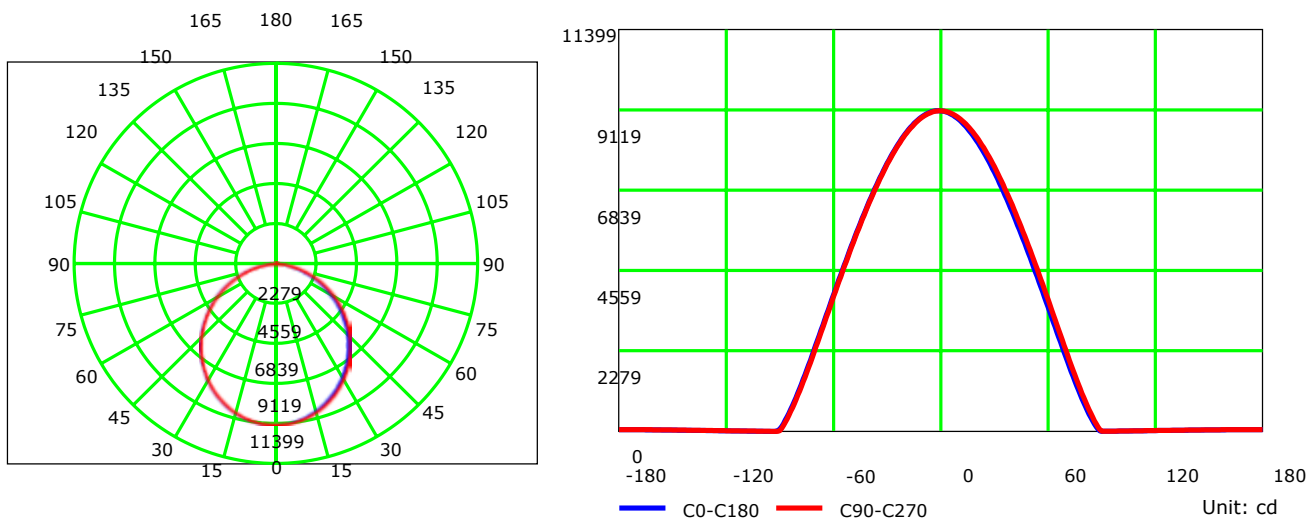


# LINEAR HIGHBAY LIGHT

## Luminous Intensity Distribution Curve

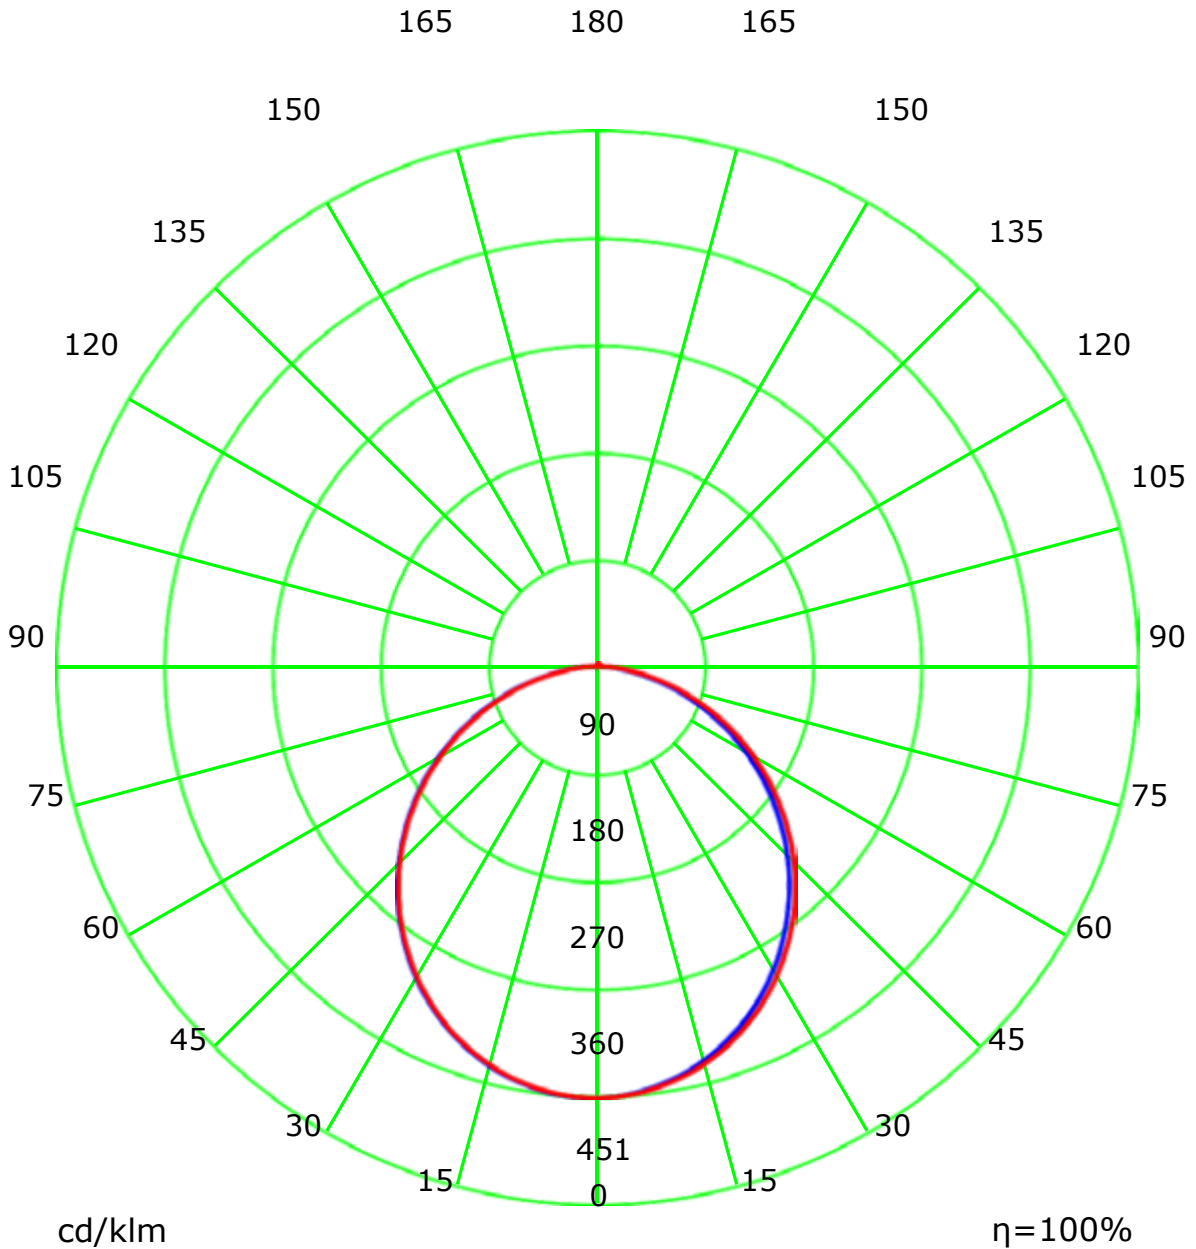


- C0-C180
- C90-C270

## Illuminance at a Distance(Beam Angle)

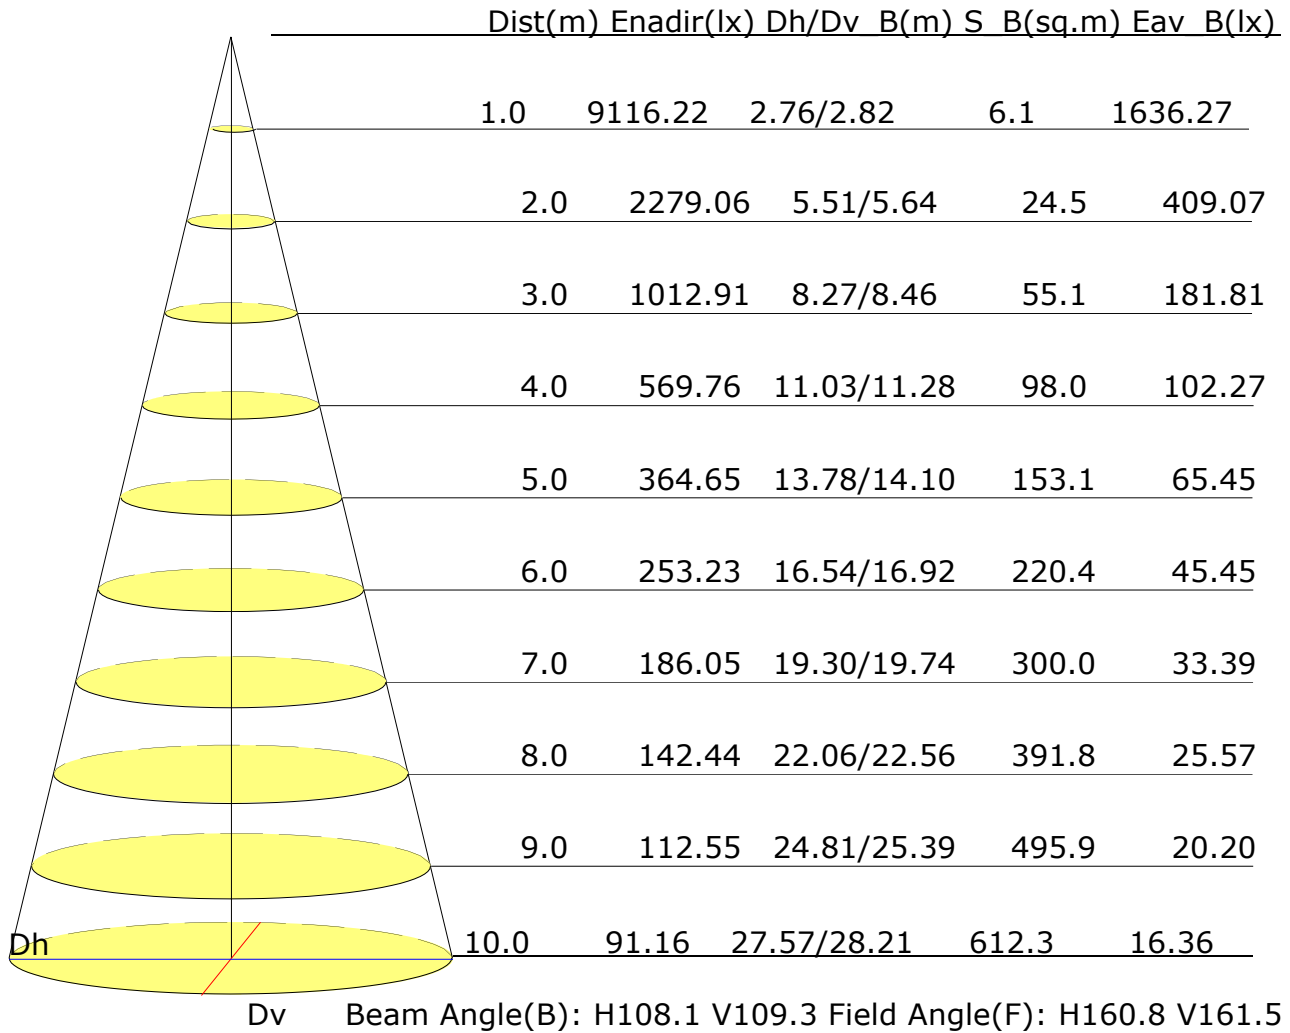


# LINEAR HIGHBAY LIGHT

## Illuminance at a Distance(Field Angle)

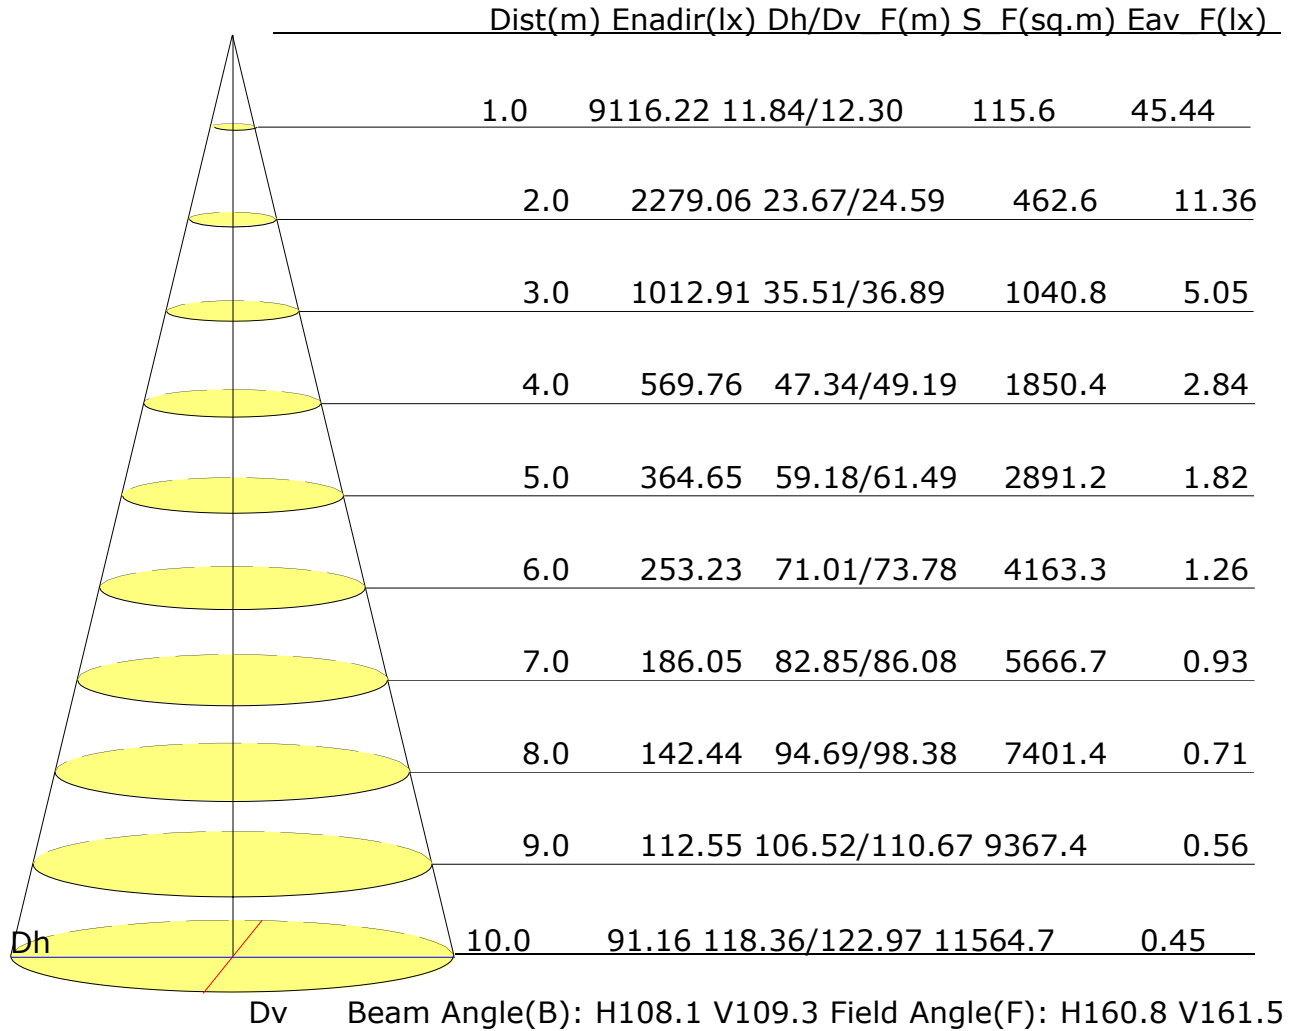

# LINEAR HIGHBAY LIGHT

## LCS Graph

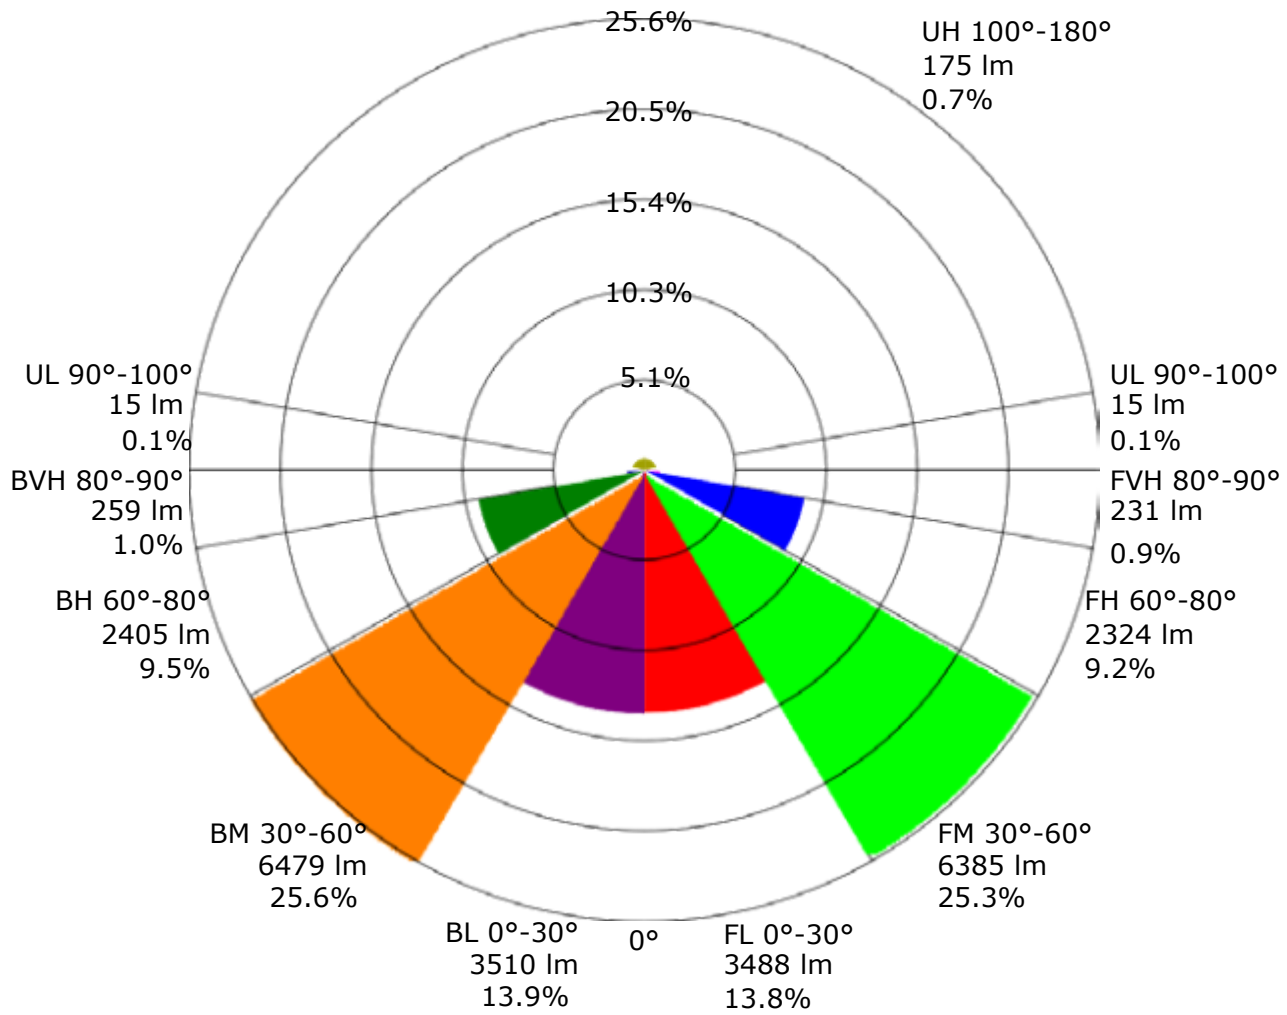

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

# LINEAR HIGHBAY LIGHT

## INSTALLATION INSTRUCTIONS

Possible maximum product weight (when specific mounts or function was chosen)

Power	Weight	Product Dimension
320W	25.35 LBS	47.24" x 12.59"

### Warning /Avertissement

#### MIN 90°C SUPPLY CONDUCTORS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR

#### LES FILS D'ALIMENTATION 90 °C MIN

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONSULTEZ UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.

# LINEAR HIGHBAY LIGHT

## INSTALLATION INSTRUCTIONS

### Cautions:

1. Can not use the electric generator to test the LED lamp.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.

### Notice:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.

### Attention:

1. Please check if there is any damage during shipping. If so, please contact manufacturer timely.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

### Wiring Diagram & Instruction:

3 dimming functions are available in this high bay light:

1. Constant current can be achieved by 1-10VDC dimming.
2. PWM signal dimming.
3. Variation of resistance unit dimming.

### Wiring Instruction


L:Black

N:White

⊕ : Green/Yellow

+DIM: Purple

- DIM: Grey

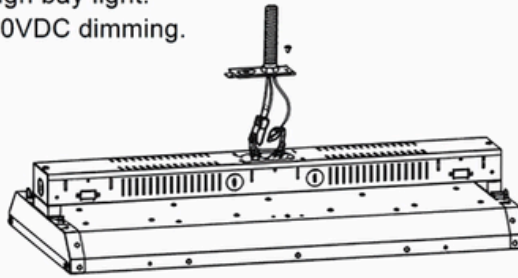

Please choose the appropriate dimming way according to your needs. You can also choose not to use this function.

\*The product can not be connected to a dimming device when it's equipped with Motion ensor.

Three Installation: Chain/Cable installation, 3/4"NPT Installation, Surface Mounting/Pendent Mounting

**(Please choose the most suitable installation method for the unchased product as per your needs)**

### A.Hanging Installation: ( Chain/Cable)

Step1.Hook up the chain: (Figure 1)

Step2.Connect the chain with fixture: (Figure 1)

Step3. Fix the chain on the rail, adjust the chain length as per need: (Figure 1)

Step4.After the fixing , choose suitable wiring knock out, do wiring according to local standard and code(Two different wiring methods for this installation).

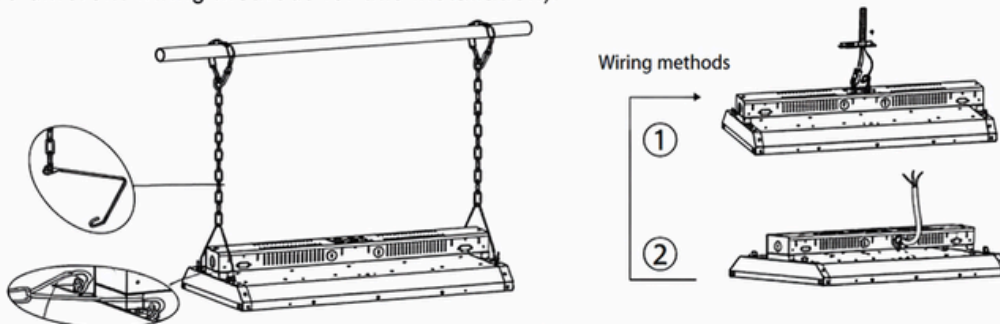


Figure1

# LINEAR HIGHBAY LIGHT

## INSTALLATION INSTRUCTIONS

### B. 3/4" NPT Installation:

- Step1. Mount the bracket on 3/4" NPT (Figure 2);
- Step2. Lock fixture on the bracket (Figure 3);
- Step3. Do wiring according to local standard and code.
- Step4. Lock side brackets with screw driver (Figure 4).



Figure2

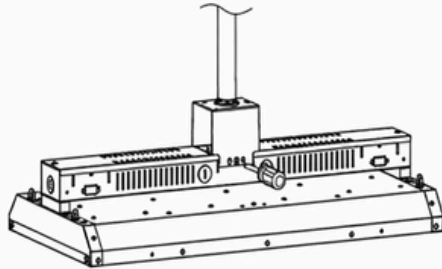


Figure3

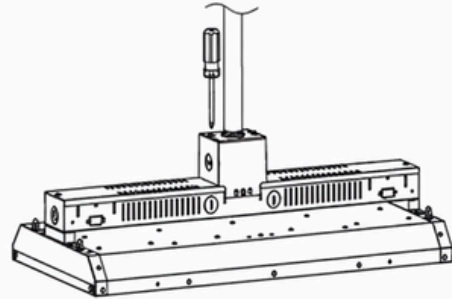


Figure4

### C. Surface Mounting/ Pendant Mounting:

- Step1. Mount the bracket on the rail or ceiling (Figure 5)
- Step2. Mount bolt on the rail or ceiling, and mount the fixture bracket on the bolt (Figure 6); and then install the fixture. (Figure 7).
- Step3. After mounting, choose suitable wiring knock out and do wiring according to local.




Figure5

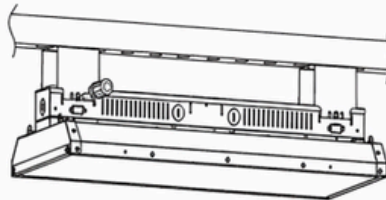


Figure6

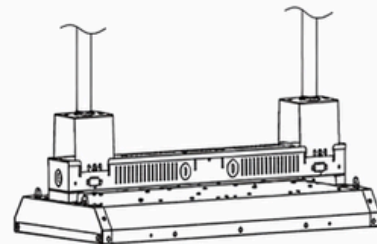


Figure7

### Extra Accessory Option Installation: 1: Wire Guard, 2: Motion Sensor/PIR Sensor, 3: Backup driver.

#### 1. Wire Guard: (Purchase the correct size wire guard from manufacturer)

- Step1. Mount the wire guard on the fixture with screws (Figure 8)

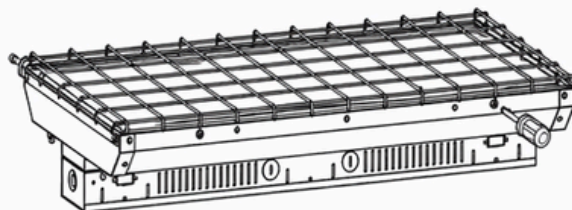


Figure8

# LINEAR HIGHBAY LIGHT

## INSTALLATION INSTRUCTIONS

### 2. Motion Sensor /PIR Sensor:(Both sensor are with same installation )

Step1. Open the driver cover plate with a screwdriver (Figure 9)

Step2. Knock out the side cover, mount the sensor on the side, do wiring accofig to instruction on sensor (Figure 10).Step3. Fix the driver cover plate back in place (Figure 11).

### Wiring Instruction

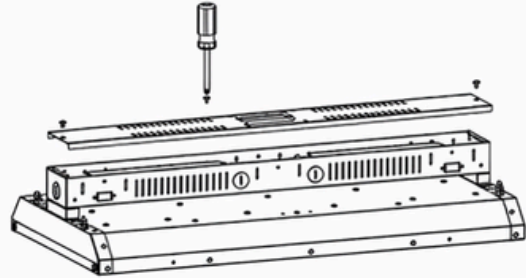
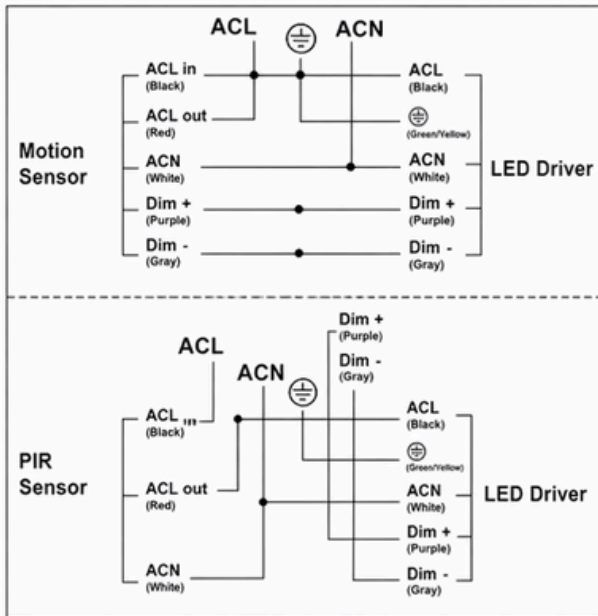


Figure9

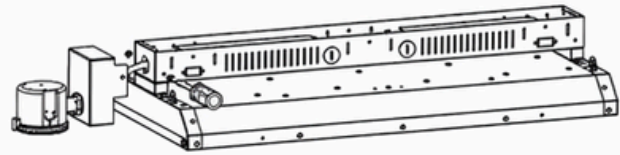


Figure10


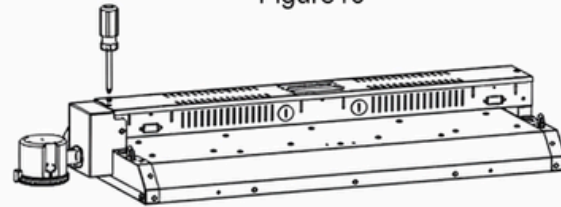


Figure11

3. Backup driver is a Listed emergency driver and needs a professional electrician to install according to NEC. rule and applicable installation code. And the below wiring is for reference.

### Wiring Instruction

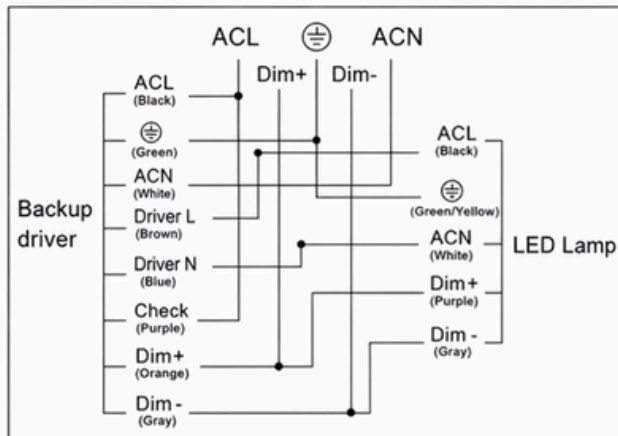

# LINEAR HIGHBAY LIGHT

## Packaging

Box Type	Box Dimension	Qty	Net Weight	Gross Weight
Outer box	50.78" x 14.96" x 6.69"	1PC/Bo x	19.40LBS	24.25LBS
Outer box (Sensor)	55.31" x 14.96" x 6.69"	1PC/Box	20.50LBS	25.79LBS

## Application Image

