

LED AREA LIGHT



The Area Light from Lumens Depot is an economical and modern lighting solution designed for high performance and energy efficiency. Delivering high lumens per watt, it ensures maximum power savings while helping qualify for utility rebates. Ideal for parking areas, loading docks, and general outdoor lighting applications, this fixture combines reliability with cost-effective operation.

- High Efficiency Seoul Chip
- Ultra thin sleek design
- Up to 139 lumens per watt
- Optional 3 pin Screw-in photocell
- Built-in 10KV Surge protector
- Several bracket options
- Heat resistant polycarbonate optical lens
- Die Cast Aluminum housing
- Available in White, Grey, Bronze and Black Housing
- Universal 100-277Vac / 480Vac optional
- DLC Premium Approved


LED AREA LIGHT

Housing	Watts	Lumens	CCT	IP	Input Voltage	Certifications
Black	320W	42941.5Lm	5000K	IP65	100-277Vac	UL & DLC
White	150W	21578.8Lm	5000K	IP65	100-277Vac	UL & DLC
Grey	320W	42941.5Lm	5000K	IP65	100-277Vac	UL & DLC


tional Photocell

Specifications

CRI	>70
Light Efficacy	138.52Lm/W (150W) • 138.8Lm/W (320W)
Input Voltage	Universal 100-277Vac / 480Vac optional
Frequency	50/60Hz
PF.	>0.92
IP rating	IP66
Operation Temperature	-20°C to 45°C
Life Span	50000 hours
Required Pole Size	60mm (top end)
Recommended Installation Height	6-8M (150W) • 10-12M (320W)


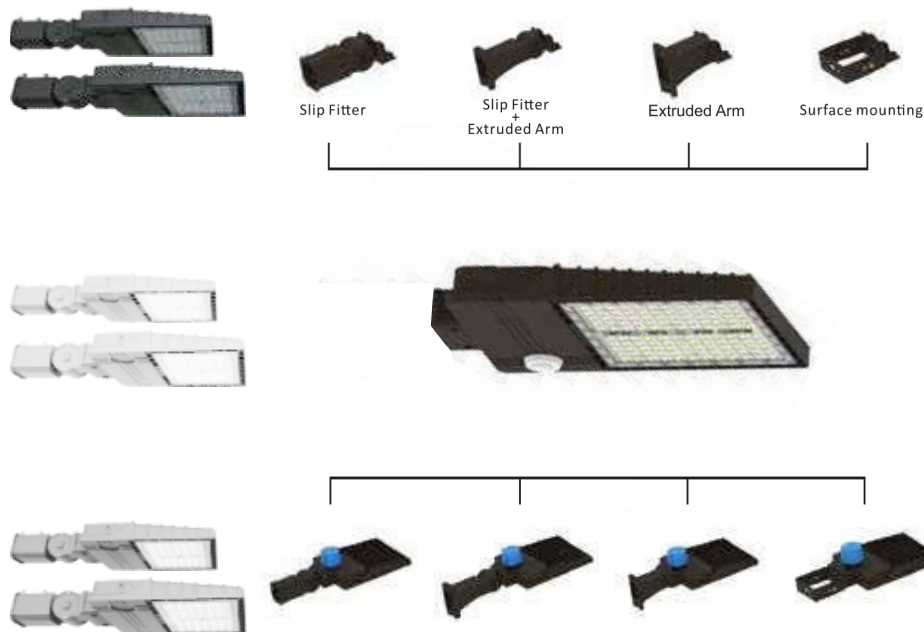


CORRELATED COLOR TEMPERATURE (CCT)








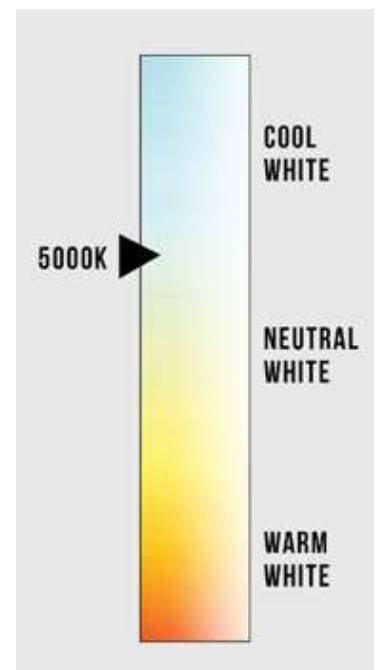


LED AREA LIGHT

Dimensions

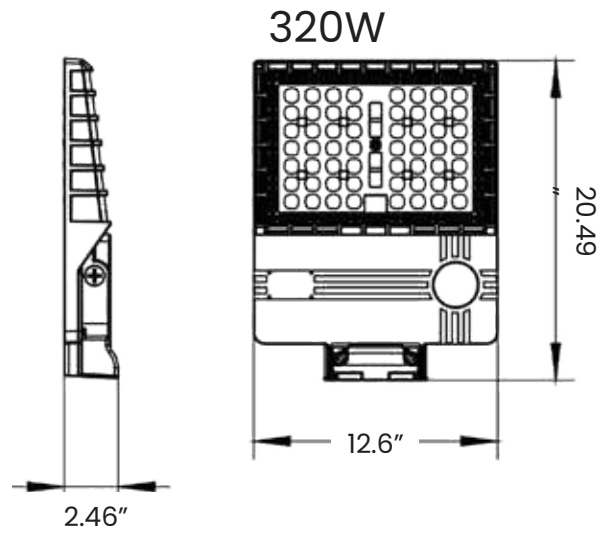
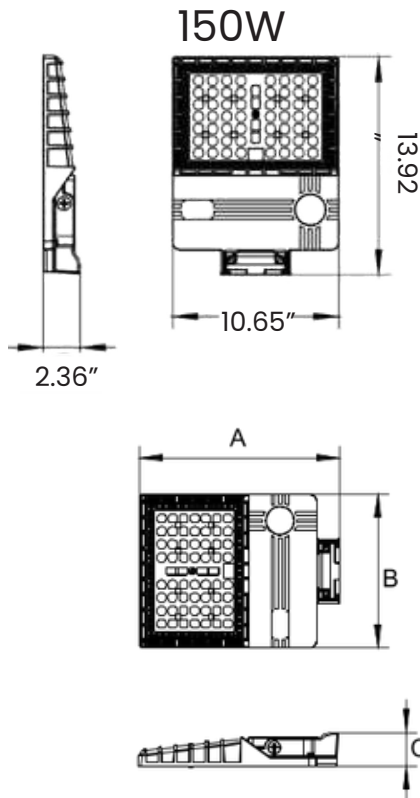


Power / Size	A	B	C
80W/ 100W/ 150W	13.92"	10.65"	2.36"
200W	16.54"	12.6"	2.46"
250W/ 320W	20.49"	12.6"	2.46"

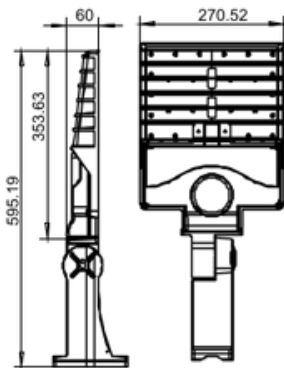



LED AREA LIGHT

Wiring & Features

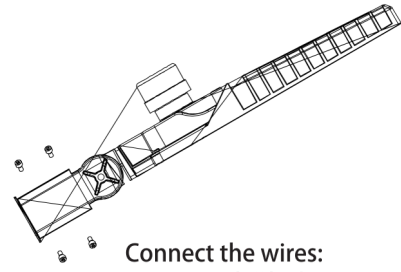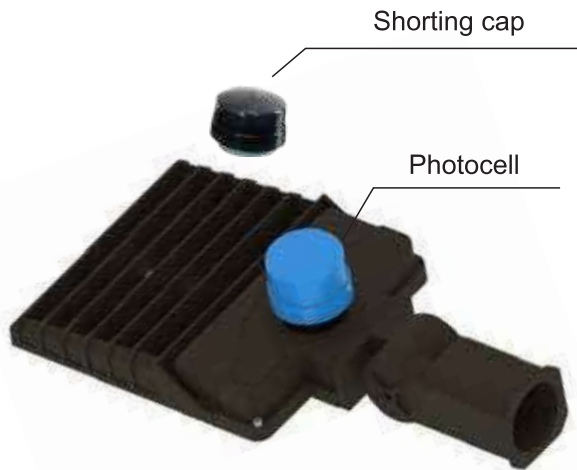

Connect the wires:
AC/L match Black;
AC/N match white;
PE/Green match ground;


Photocell/Non-Photocell Removable
Photocell/Non-Photocell Removable, Twist Lock for them

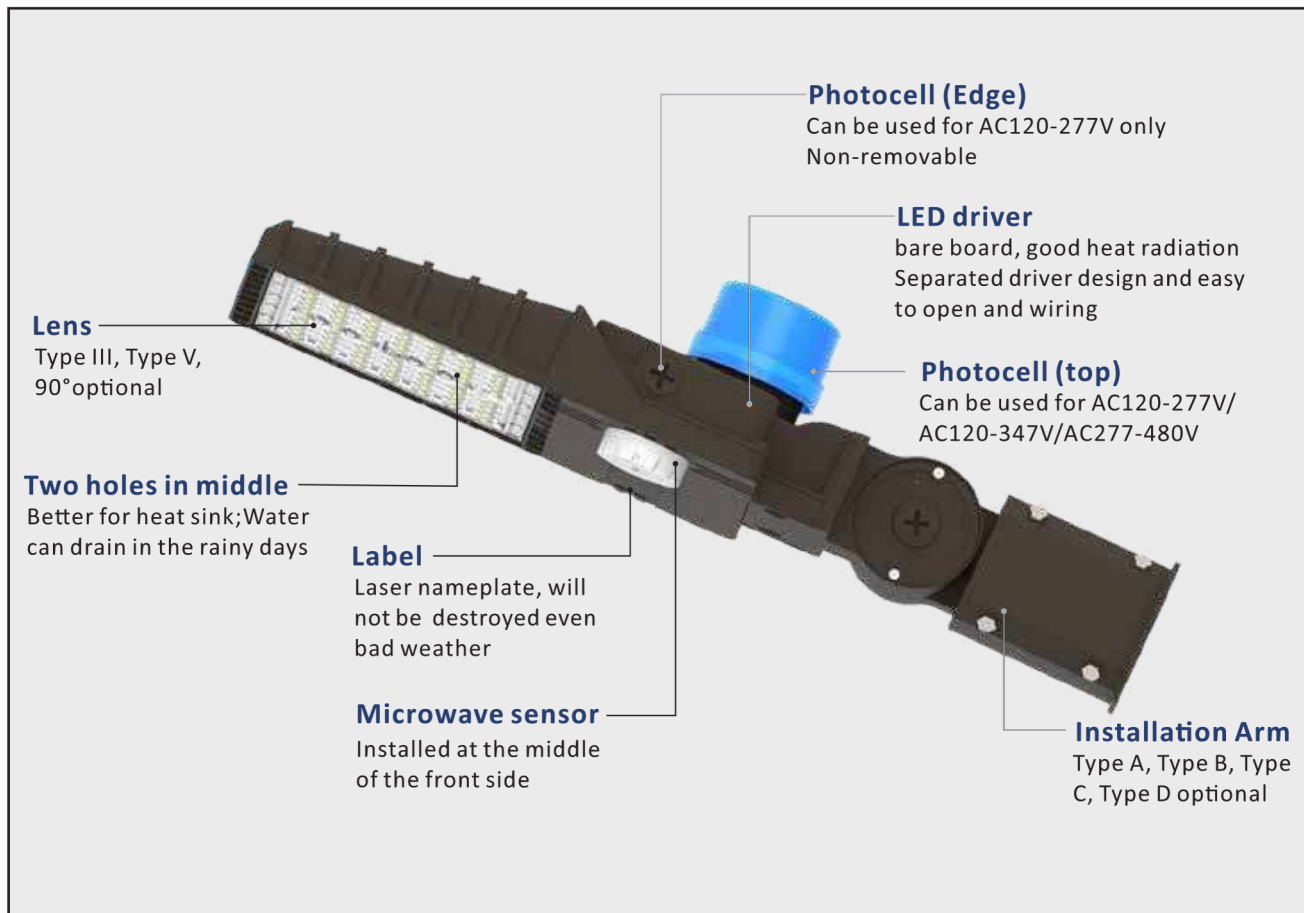


LED AREA LIGHT

Distribution Diagram


90°

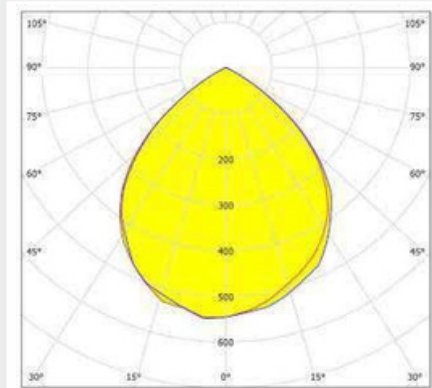


Type II

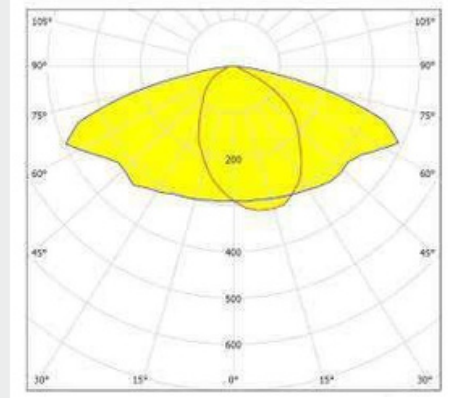


Type III

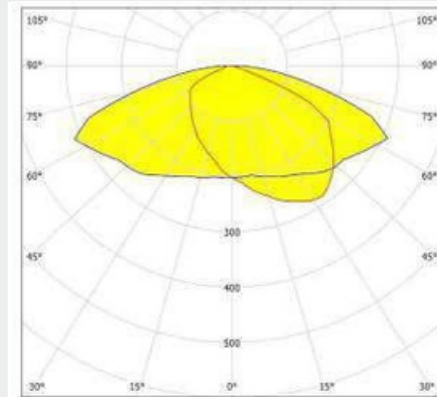

Type IV

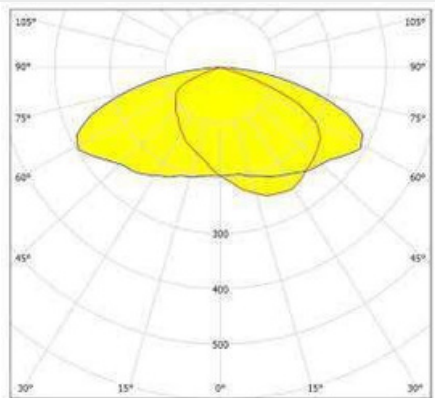

Type V

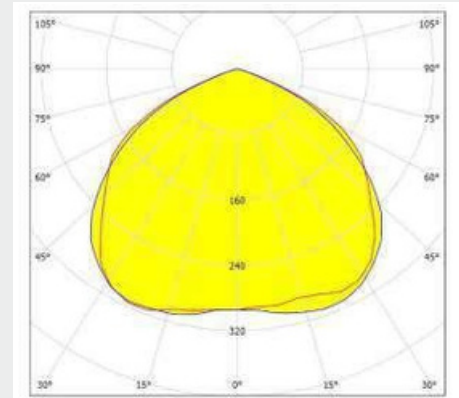


LED AREA LIGHT


Installation

ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!

Type A (Slip Fitter)

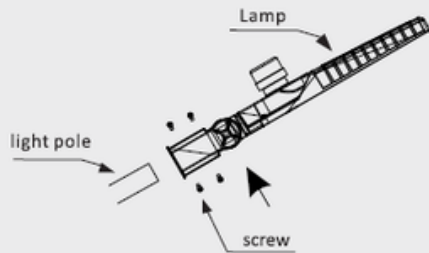


1. Attach the lamp arm to the lamp first

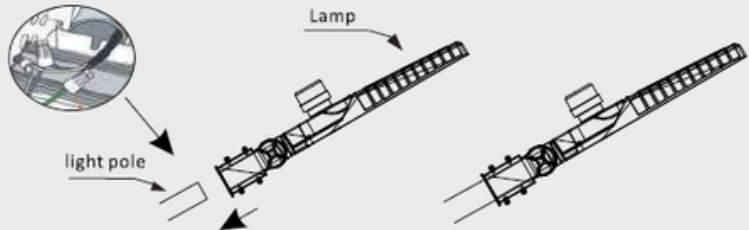

2. Connect the input wire and install the lamp on the lamp post

Note: after lengthening the input wire, meet the height requirement of the light pole and connect the wire at the bottom of the light pole.

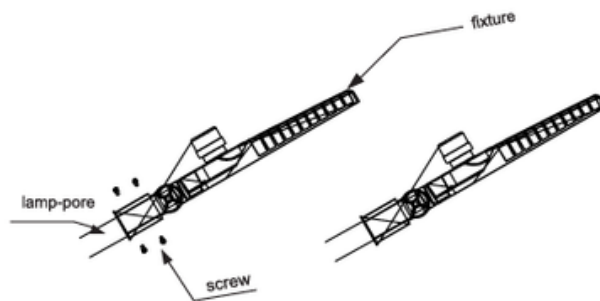

Slip Fitter


Install slip fitter on the lamp pole, wire and tighten screws




LED AREA LIGHT

Installation



Type B (Slip Fitter+Extruded Arm) & Type C (Extruded Arm)





1. First install the lamp arm in the proper position of the lamp pole





2. Install the light fixture on the lamp arm

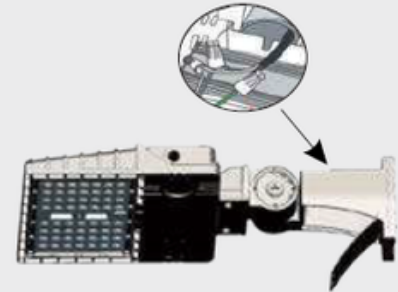

3. Lower cover of the lamp arm is opened and Complete wiring at handhole on pole. Use suitable Listed water proof cord bushing and outlet box cover.



Install slip fitter on the lamp pole,wire and tighten screws



Install slip fitter on the lamp pole,wire and tighten screws

Slip Fitter
+
Extruded Arm




Extruded Arm




LED AREA LIGHT

Installation


Type D (Surface Mount Arm)




1. First install the lamp arm in the proper position of the lamp pole

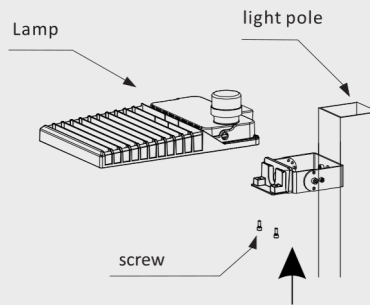

2. Install the light fixture on the lamp arm

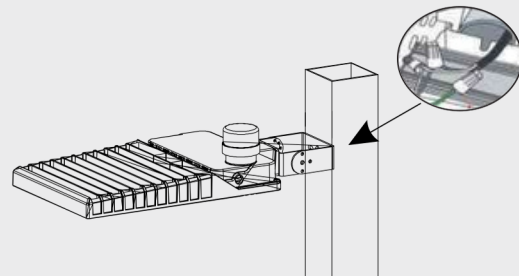

3. Lower cover of the lamp arm is opened and Complete wiring at handhole on pole. Use suitable Listed water proof cord bushing and outlet box cover.



Install slip fitter on the lamp pole,wire and tighten screws

Surface mounting



LED AREA LIGHT

Testing

IP66 rated, suitable for wet locations



IK10 rated



Passing the testing at -40°C, can be used at cold area



LED AREA LIGHT

Packing

Installation Arm	Carton Dimension	Qty/Carton
Slip Fitter	24.53"*16.77"*8.7"	12PCS
Slip Fitter+Extruded Arm	24.53"*19.96"*10.83"	12PCS
Extruded Arm	21.77"*19.96"*10.83"	12PCS
Surface Mount Arm	22.32"*20.16"*6.5"	12PCS



Slip Fitter Mount



Straight Arm Mount



Yoke Mount



Optional Photocell

Model	Carton Dimension	Qty/Carton	N.W	G.W	20GP	40HQ
80W	16.02 '"*12.48'"*4.8'"	1PCS	11.68lbs	13.49lbs	1528PCS	4203PCS
100W						
150W						
200W	18.58'"*14.25"*5.39'"	1PCS	15.43lbs	17.20lbs	1025pcs	2820pcs
250W	22.52'"*14.25'"*5.39'"	1PCS	20.26lbs	22.51lbs	848PCS	2332PCS
320W						



Safety Precautions

To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.

Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.

Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.

For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.

Turn off the power when you perform any maintenance.

Verify that supply voltage is correct by comparing it with the luminaire label information.

Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.

All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

Avoid direct eye exposure to the light source while it is on.

Account for small parts and destroy packing material, as these may be hazardous to children.

SUITABLE FOR DRY OR DAMP LOCATION