LED WALL PACK LIGHT(WK06)

Wattages: 40W,60W,80W,120W,40/30/20W, 60/40/30,80/60/40W, 120/100/80W Tunable



Replacing metal halide xtures with WK06series LED wall pack increases energy eciency and lowers maint enance costs.Rugged die-cast aluminumHeat dissipation, while durable PC lens isUV-stabilized to withstand conditions of outdoor industrial or commercial locations.

Product Features:

- Aesthetic, utility appearance,andpatented;
- Optically designed PC cover,almost no dark macula, which makes the whole lamp emit light evenly and meets the requirementsof DLC Premium 5.1;
- Adopt high light transmissionandanti-UV PC lampshade;
- Low-voltage light control sensorcan be installed, which is safe and reliable;
- Power and CCT selective areavailable to meet the different needs of customers and reduce the inventory pressure ;
- Easy and fast installation , andtraditional junction box installation method is retained;
- Standard respirator extends theservice life of lamps.
- IP65, completely waterproof anddustproof;
- Adjustable angle from 0-90°
- 120-277V / 0-10V and 120-347V/277V-480V,0-10V dimming power supply are available.

SPECIFICATION				
WAT TA G E	40W;40/30/20W Tunable	60W;60/40/30 WTunable	80W;80/60/40W Tunable	12 0W;120/100/80WTunable
EFFICACY	Up to 130LPW			
CCT	3000K/4000K/5000K Tunable			
CRI	Ra >70			
INPUT VOLTAGE	AC120-277V, AC120-347V,AC277-480V			
OPERATING TEMPERATURE	-40℉~113℉			
STORAGE TEMPERATURE	-40℉~158℉			
PF	＞0.9			
DRIVER EFFICIENCY	＞90%			
PROTECTION LEVEL	Location			
LIFE TIME	over 50,000 hours			
WARRANTY	5 year limited			

LED WALL PACK LIGHT(WK06)


Wattages: 40W,60W,80W,120W,40/30/20W, 60/40/30,80/60/40W, 120/100/80W Tunable

PACKING/WEIGHT:


Model	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/pcs (lbs/Kg)	Remarks
40W/30W/20W	L237*W205*H174mm L9.33"*W8.07"*H6.85"	1pcs/ctn	3.09Lbs/(1.40kg)	3.75Lbs/(1.70kg)	0.15M cable
80W/60W/40W	L280*W260*H195mm L11.02"* W10.24"*H7.68"		4.63Lbs/(2.10kg)	5.51Lbs/(2.50kg)	
120W/100W/80W	L318*W312*H209mm L12.52"* W12.28"*H8.23"		5.51Lbs/(2.50kg)	6.83Lbs/(3.10kg)	

PRODUCT DIMENSION:


40W/30W/20W

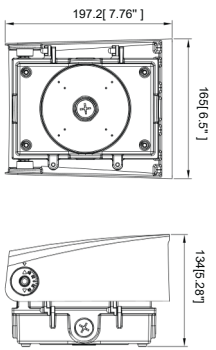

80W/60W/40W

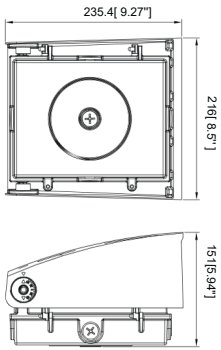

120W/100W/80W

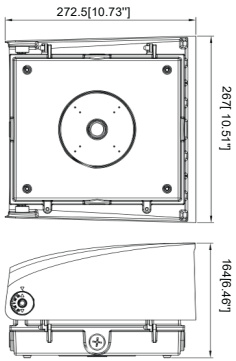

PRODUCT ACCESSORIES:

ACCESSORIES MOUNTING BRACKETS



4 Pcsscrews 5 PCS Wire Nuts 1 pcs foam

OPTIONS



Photosensor



ANT-5-4T
ANT-6-4T



ANT-5-16B-3

SPM

LED WALL PACK LIGHT(WK06)

Wattages: 40W,60W,80W,120W,40/30/20W, 60/40/30,80/60/40W, 120/100/80W Tunable

ORDERING GUIDE:

EXAMPLE:


SS-WK06 - 40W-H-XX-TCP(XX)-Y

SS	WK	40W	H	xx	TCP(XX)	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	INPUT VOLTAGE	Tunable CCT and Power	CONTROL
Starlake	LED WALL PACK	40W=40/30/20W 80W=80/60/40W 120W=120/100/80W		Blank=120-277Vac MV=120-347Vac HV=277-480Vac	(3000K/4000K/5000K)	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Blank: no provide sensor


PHOTOMETRICS:

For complete IES files, please visit our website.


SS-WK06-120W-H-5000K

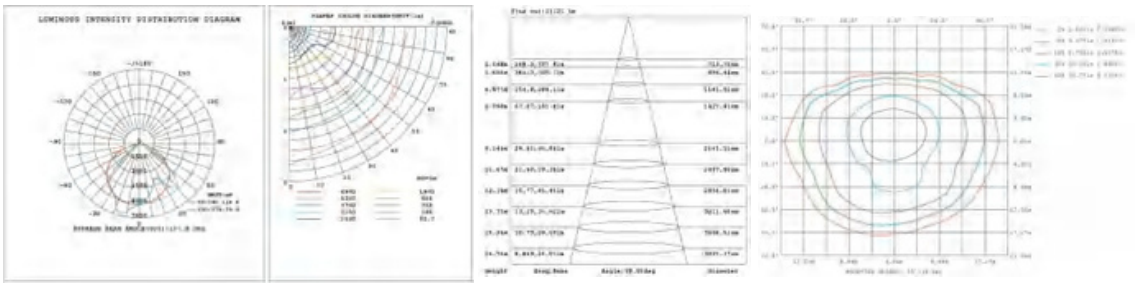

SS-WK06-80W-H-5000K

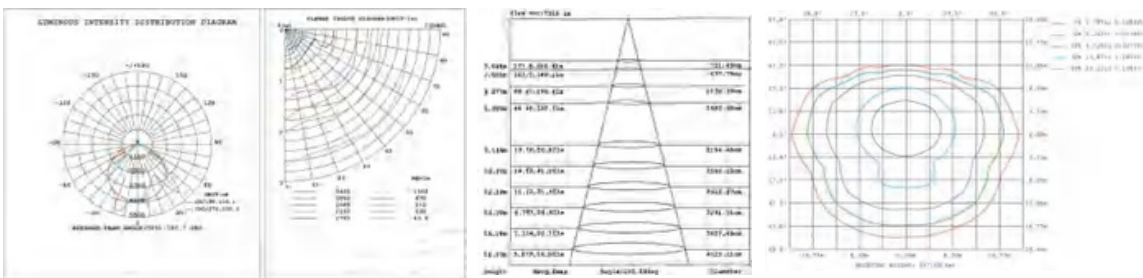

SS-WK06-60W-H-5000K




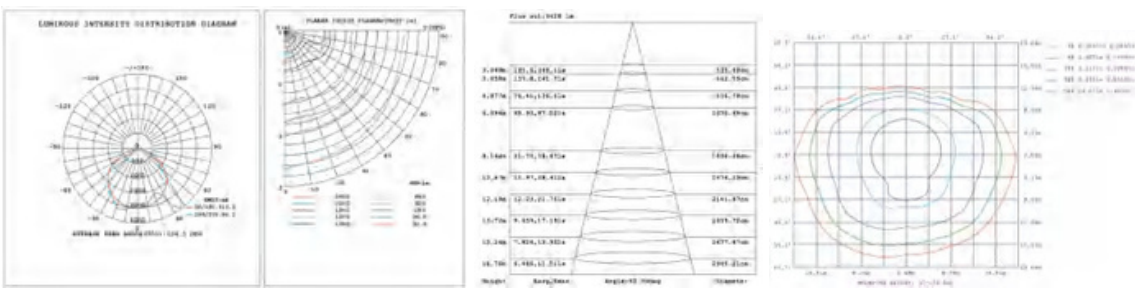


LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

LED WALL PACK LIGHT(WK06)


Wattages: 40W,60W,80W,120W,40/30/20W, 60/40/30,80/60/40W, 120/100/80W Tunable

SS-WK06-40W-H-5000K

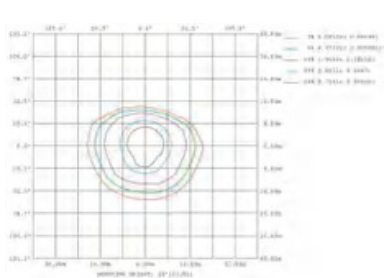





Installation Instruction


1.Use a screwdriver to remove the screw and the fixing knob and remove the heat sink assembly.




2.Use a screwdriver to remove the screw and remove the outer casing.




3. Unscrew the cover of the entry hole on the lamp base and remove the cover.




4.According to the embedded terminal box, punch the correspongding mounting hole on the light's mount.




5.Tear off the adhesive paper of the waterproof pad and stick the waterproof pad to the lamp base.




6. Put the input line and dimming line (if not, please ignore) from the embedded junction box through the lamp base and then screw the lamp base to the embedded junction box.




7. Install the upper half of the fixture on the lamp base, then use the threaded terminal to connect L/N/ ground wire, dim+/dim-(if not, please ignore) separately,and then plug the threaded terminals into the embedded junction box,adjust the switch to the required color temperature.



8.Screw the case with a screwdriver.



9.Install the heat sink assembly and tighten the screws and fixing knob with a screwdriver to complete the installation.




LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

LED WALL PACK LIGHT(WK06)

Wattages: 40W,60W,80W,120W,40/30/20W, 60/40/30,80/60/40W, 120/100/80W Tunable

Applications:

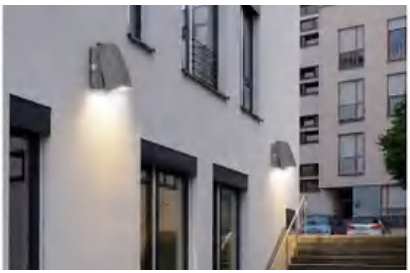
Safety Information:

1.Using the standard working voltage: AC120~277V & AC120~347V,AC277-480V,50/60Hz, do not exceed.
2.Be sure the power supply is turned off before installation.
3.Switch off power of the mains supply or the connection lead respectively before doing any works.
4.Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
5.Be sure the connection between the wires is in good condition when install the lamps, beware of leakage.
6.Please read the specification carefully before installation.
7.The complete installation must be handled by an electrical expert.