

4"/6"

GimbalFloodFloatCan-less Recessed Downlight with 5CCT Selector

Project Name:

Order Number:

Prepare by:

Note:

Date:

Type:

GIMBAL SPOT FLOAT

The Canless Flood Float Gimbal downlight is designed to highlight the architectural and artistic elements in your home. It features adjustment of 80-degree tilt, 360-degree rotation, fully dimmable and 95 CRI rating (color rendering index). With the canless design, it no longer requires a recessed housing for the installation, allows you to install it almost anywhere. These recessed down lights are also designed for use in new construction, remodel and retrofit installation without needing a housing or j-box.


Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.



Select color temperature from

- 2700K **WARM WHITE**
- 3000K **SOFT WHITE**
- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**

DIMENSION

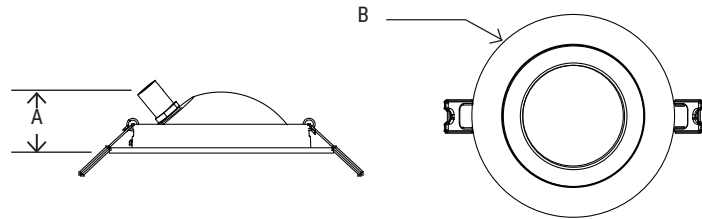

MODEL#	LD36	LD49
A	1.5"	2"
B	5"	7.2"

Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

TECHNICAL SUMMARY

	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
	540	9W	60 lm/W	90	120V , 60 Hz	60°	2700K/ 3000K/ 3500K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F
	900	12W	75 lm/W							

PART NUMBER ORDERING SUMMARY

M	F	G	D	6	12	-	FL	-	5CCT	-	WH
M	F	G	D	4"/6"	9W/12W		FL		5CCT		WH
	Float	Gimbal	Downlight	Aper ture	Wattage		Flood		27K/30K/35K/40K/50K		White

4"/6"

GimbalFloodFloatCan-less Recessed Downlight with 5CCT Selector

Project Name:

Order Number:

Prepare by:

Note:

Date:

Type:

CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, and foam gasket with deep baffle white ring.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Can-less design, no can housing needed for the installation
- Pre-installed surface mounting bracket adapter
- Junction box included
- Ceiling mount, directly mount on drywall

LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.



JUNCTION BOX INCLUDED

(Junction Box picture may vary)

**360° AND 80°**

These recessed light can be rotated 360° and tilt up to 80°. Easy for you to adjust the angle and direction after the installation.

COMPATIBLE PRODUCTS (SOLD SEPARATELY)

Mounting plate for 3"/4"/6" can-less downlight



Mounting plate for 4"/6"/8" can-less downlight



3ft/ 10ft Extension cord for can-less downlight