



8"

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:



LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
1260	18W	70 lm/W	90	120V, 60 Hz	104°	2700K/3000K/ 3500K/ 4000K/5000K	>0.9	50,000 hrs	-5°F ~ 104°F

M D D 8 18W - 5CCT



8" SurfaceMountDiskLightwith 5CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

- Unit includes metal housing, LED array, heat sink, lens, surface mounting bracket with bracket adapter and smooth disk trim.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Surface mount on junction box
- Pre-installed surface mounting bracket adapter
- Surface mounting bracket included


LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations,
Title 24 JA8-2022, RoHS

WARRANTY

5 years manufacturer warranty, consult factory for more details.
Terms and conditions may apply.

PHOTOMETRY

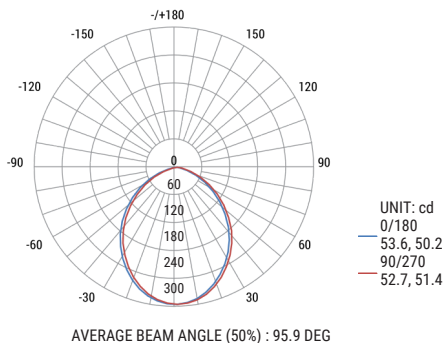

RECESSED MOUNTING ACCESSORIES (SOLD SEPARATELY)



MOUNTING KITS

For recessed mounting