

Linear High Bay

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

DESCRIPTION



Our linear high bay light is a cost-efficient solution and great replacement for metal halides, HID or CFL Bulbs. Upgrading to LED can save you money on your electricity bill, improve visibility, help you work safely, and enhance productivity.

COLOR TEMPERATURE


5000K
DAY LIGHT



Product Information

Product Name	Lumens	Watts	Efficacy	CRI	VOLTAGE	DIMMING	CCT	LIFE	OPERATING TEMP.
Adjustable Panel High Bay	29700lm	220W	135m/w	80+	120-277V	0-10V	5000K	>50,000hrs	-4°F ~ 104°F

DIMENSIONS

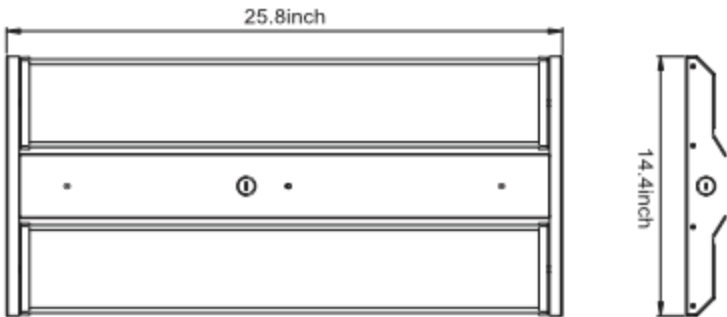



M H A J 2 4 220W - 50K



Linear High Bay

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

PHOTOMETRY

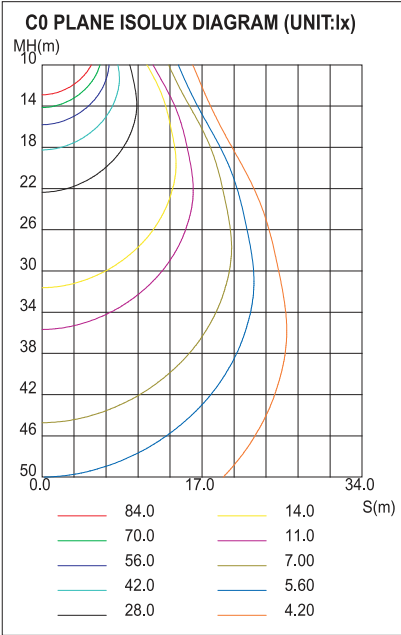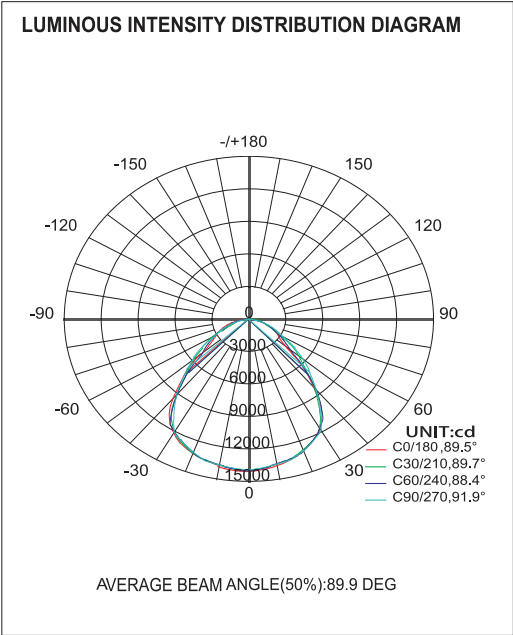

TECHNICAL SUMMARY

CONSTRUCTION

Unit includes heavy duty metal frame, LED array, heat sink, and lens.
High quality frosted PC lens.
Efficiency LED array.
Diffuse for uniform illumination.
CRI 80+

DRIVER

120-277V universal input voltage.
0-10V smooth flicker free dimmable.

MOUNTING

Ceiling mounting.
Pendant mount.


LISTING

UL 8750 LED equipment in lighting products.


WARRANTY

5 years manufacturer warranty, consult factory for more details.
Terms and conditions may apply.

Package Contents

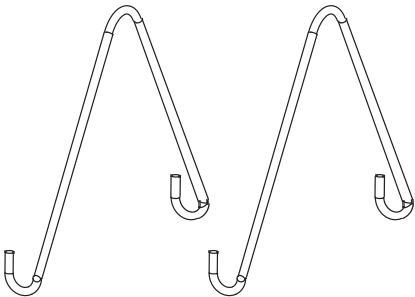

Suspending Hook

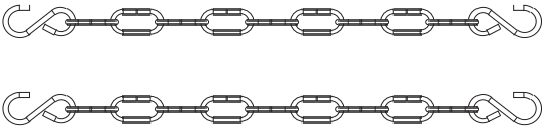

Hanging Chain

Linear High Bay

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

FEATURES



ACCESSORIES



Input Voltage 120-277V
8W Output
• Output Voltage 150-200Vdc



120-277V On/Off Passive
Infrared Occupancy Sensor



Input Voltage 120-347V
25W Output
• Output Voltage $\leq 175Vdc$



Bi-level passive infrared
Occupancy Sensor