

Gimbal Retrofit Downlight

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

DESCRIPTION



For every retrofit downlighting project, the ProLED Select Gimbal Downlight Series offers a high-performing option. With the option to spin the beam 355° and change its direction up to 25°, this fixture simplifies directional lighting to suit your desired lighting needs. One of the most adaptable downlights available on the market is created when you combine this with five Selectable Color Temperatures.

EASY-SWITCH
5 SELECTABLE

Select color temperature from






- 2700K WARM WHITE
- 3000K SOFT WHITE
- 3500K NATURAL WHITE
- 4000K COOL WHITE
- 5000K DAYLIGHT



PRODUCT INFORMATION

Product Name	Lumens	Watts	Efficacy	CRI	VOLTAGE	DIMMING	CCT	LIFE	OPERATING TEMP.
4" Gimbal Retrofit	700LM	8W	87.5lm/w	90+	120V	TRIAC	5CCT	>50,000hrs	-4°F ~ 104°F
6" Gimbal Retrofit	1100LM	11W	100lm/w	90+	120V	TRIAC	5CCT	>50,000hrs	-4°F ~ 104°F

DIMENSIONS




M R D A J 4 08 - 5CCT

ROUND Shape Type Adjustable Function 408 BA/SM/FL 8W Watt 5CCT 27K/30K/35K/40K/50K

Gimbal Retrofit Downlight


Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

PHOTOMETRY

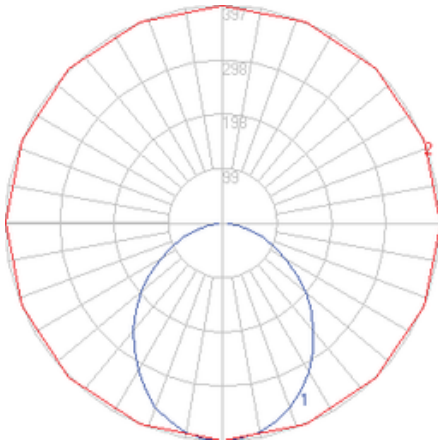

MRDAJ408-5CCT

4"

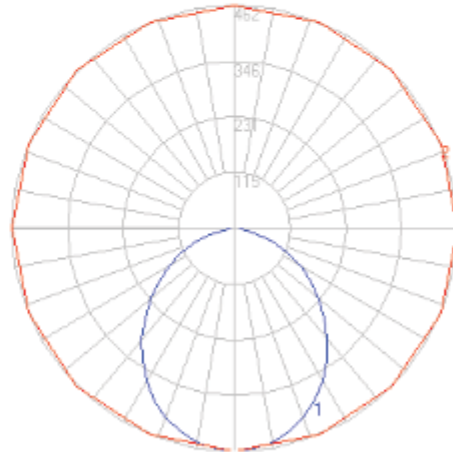

MRDAJ611-5CCT

6"

RECOMMENDED DIMMERS

CONSTRUCTION

Unit includes die-cast metal housing, LED array, heat sink, lens, and metal trim with white, brush nickel and bronze finish.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Surface mount on junction box.
- Surface mounting bracket included.

LISTING

- UL Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

WARRANTY

- 5 years manufacturer warranty, consult factory for more details.
- Terms and conditions may apply.

RECOMMENDED DIMMERS

LUTRON

- DVCL-153P
- SCL-153P
- MACL-153M
- CTCL-153PDH-WH
- TGCL-153PH-WH
- D V W C L-153PH-WH

LEVITON

- R50-IPL06-10M
- Cat.NO.6674

LEGRAND

- HCL453PTCCCV6
- DCL453PTCCCV6
- RHCL453PTC