LED Canopy Light





FEATURES

- Unique round outlook design
- Built in Power Switch Port and Occupancy Sensor options
- Wide beam angle with advanced PC cover optics.
- Anti-corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Indoor Garag Parking Lot Lighting , like Shop mall/ Air port/ Building
- LED Canopy Light , like Shop mall/ Air port / Bulding

CONSTRUCTION:

Heavy die-cast aluminum alloy housing white powder-coated finish.

ELECTRIACL:

Available as 120-277V input. -20°C to 45°C.

OPTICAL SYSTEM:

Lumileds 2835 LED chips. High quality frosted PC cover optics. 154.3° beam angle.

INSTALLATION AND MOUNTING:

ceiling mount or 3/4" conduit entry on top for pendant mounting (pendant provided by others)

WARRANTY:


5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

PERFORMANCE

Power Factor	Wattage	Voltage/CurrentInput		Light Efficiency	Kelvin Options
		120V	277V		
0.9	30W	0.25A	0.10A	125LM/W	3000K/4000K/5000K
0.9	40W	0.33A	0.14A	125LM/W	3000K/4000K/5000K
0.9	60W	0.50A	0.21A	125LM/W	3000K/4000K/5000K

LED Canopy Light


Special Fuction

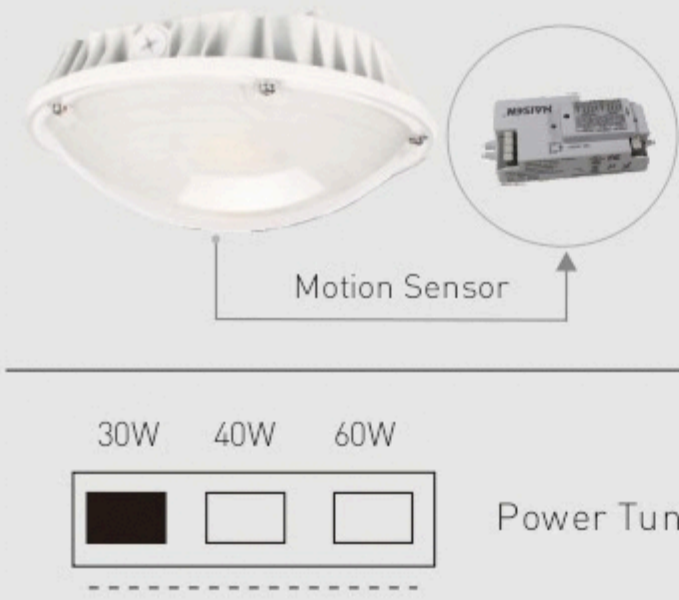


Electric Characteristic

LED Driver	UL listed KHM Brand 0-10V Dimmable		
Input power	30W	40W	60W
Lumens output	3750LM	5000LM	7500LM
Efficiency	125LM/W	125LM/W	125LM/W
CRI	>72	>72	>72
Color Temperature	5000K	5000K	5000K
Input voltage	120-277V/AC	120-277V/AC	120-277V/AC
Light distribution type	154.3D	154.3D	154. 3D
Working temperature	-20+45℃	-20+45℃	-20+45℃
Junction temperature	<75℃	<75℃	<75℃
lamps efficiency	≥90%	≥90%	≥90%
Certificate	ETL CETL DLC	ETL CETL DLC	ETL CETL DLC
Equivalent	60-100W MH/HPS	100-150W MH/HPS	150-200W MH/HPS

DIMENSION

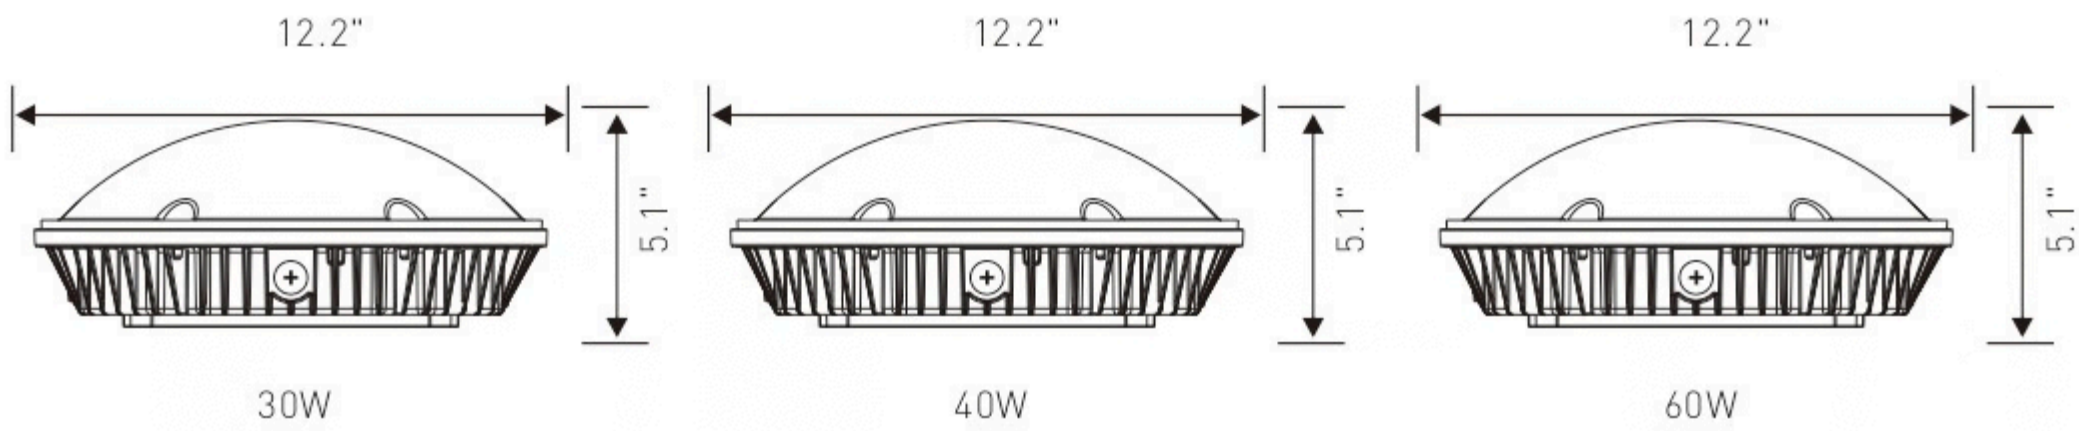

LED Canopy Light

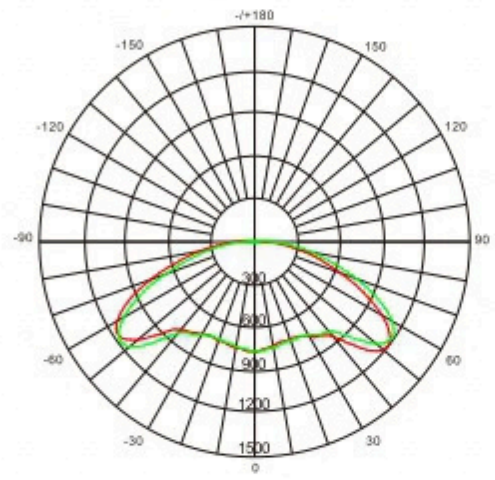


AVERAGE BEAM ANGLE(50%): 154.3°

UNIT:CD

Lumens:3750LM
Test Number:30W
Test Number:5000K

— C30/210,111.5
— C60/240,109.7
— C90/270,154.2

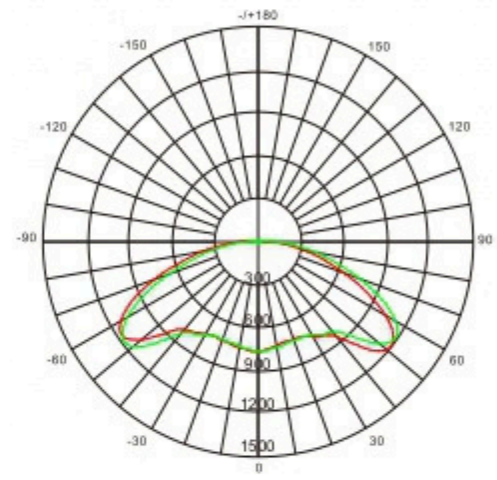


AVERAGE BEAM ANGLE(50%): 154.3°

UNIT:CD

Lumens:5000LM
Test Number:40W
Test Number:5000K

— C30/210,111.5
— C60/240,109.7
— C90/270,154.2

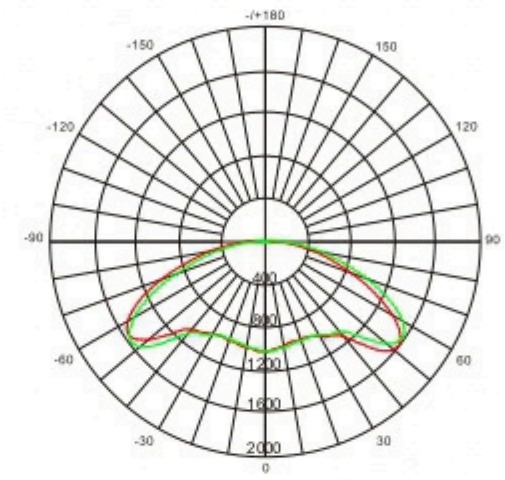

AVERAGE BEAM ANGLE(50%): 154.3°

UNIT:CD

Lumens:7500LM
Test Number:60W
Test Number:5000K

— C30/210,111.5
— C60/240,109.7
— C90/270,154.2

LUMENS DEPOT
PRO LIGHTING SOLUTION

TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com https://lumensdepot.com/
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA