4th Slim Area Light

50W / 75W / 100W / 150W / 200W / 240W / 300W





Specifications

Input Power	50W / 75W / 100W / 150W / 200W / 240W / 300W
LED Chip	SMD 3030 Lumileds or other LED chip
Driver Brand	Meanwell / SOSEN / Other Brand
Lumen	7500 LM / 11250 LM / 15000 LM / 22500 LM / 30000LM / 36000LM / 45000LM
Input voltage	AC100-277V/AC120-347V/ AC180-480V
Lumen Efficacy	150 lm/W
PF	＞0.9
Color Tempreture	2700K-6500K
CRI	70/80
THD	≤20%
Housing Color	Bronze / Black / Silver / White
Waterproof Rating	(WET) IP65
Operating Temperature	-40°C to +45°C(-40°F to +113°F)
Operating Humidity	10%-90% RH
Storage Temperature	-20℃ TO +60℃
Storage Humidity	10%-90% RH
Warranty Time	5years

LUMENS DEPOT
PRO LIGHTING SOLUTION

TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

Features



Motion sensor



Photocell sensor



ADC12 Die casting




CCT Select





Power Select

Bracket Angle 180° Adjustable

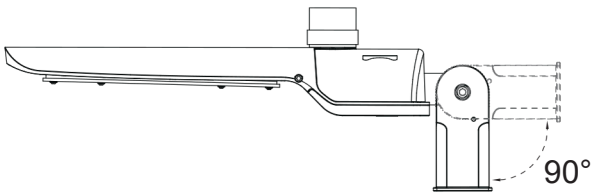


Twist Lock Photocell Sensor

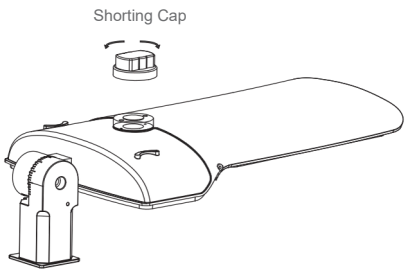


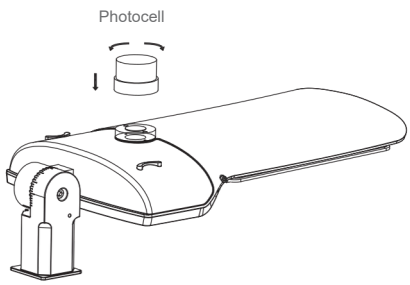

Microwave Sensor Optional

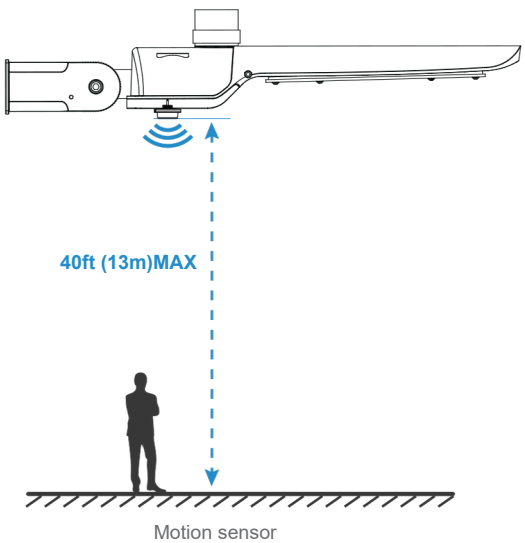


SENSOR COVERAGE

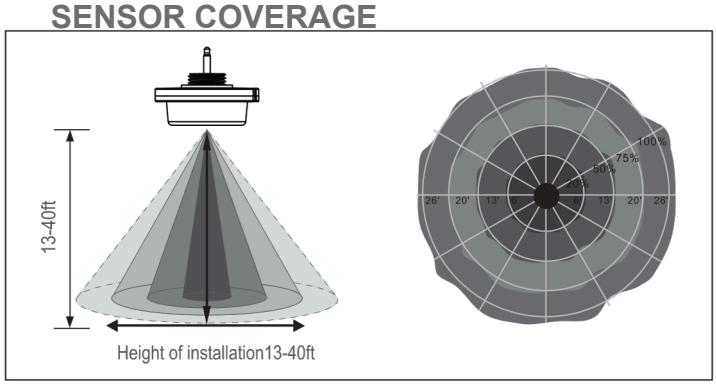


LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555
E-MAIL: helpdesk@lumensdepot.com
HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

Compatible With Different Mount Brackets







Slip Fitter Mount



Square Pole Mount



WALL Mount



Round Pole Mount

Applications



Shopping Centers



Auto Dealership




Sport Fields




Roadways

Dimension Drawings


Dimension 1: (50W~75W)

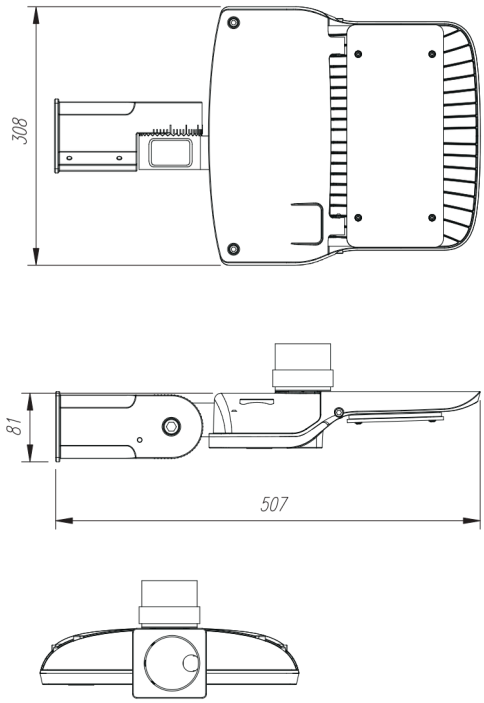

Dimension 2: (100W~150W)

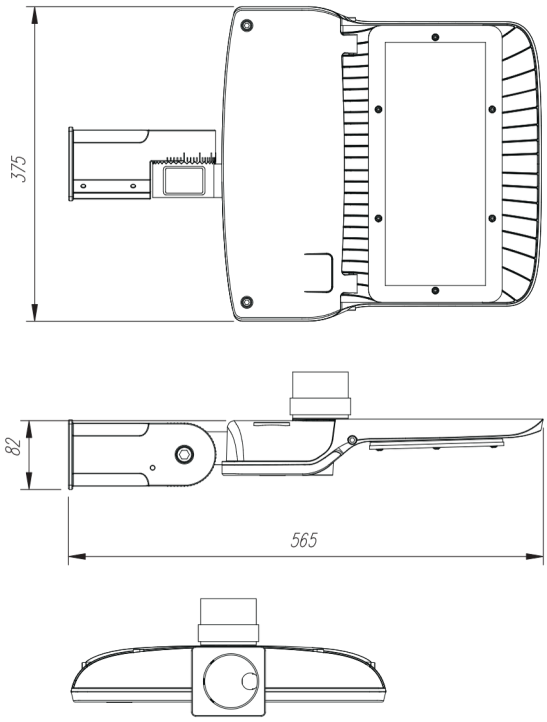


Dimension 3: (200W~300W)

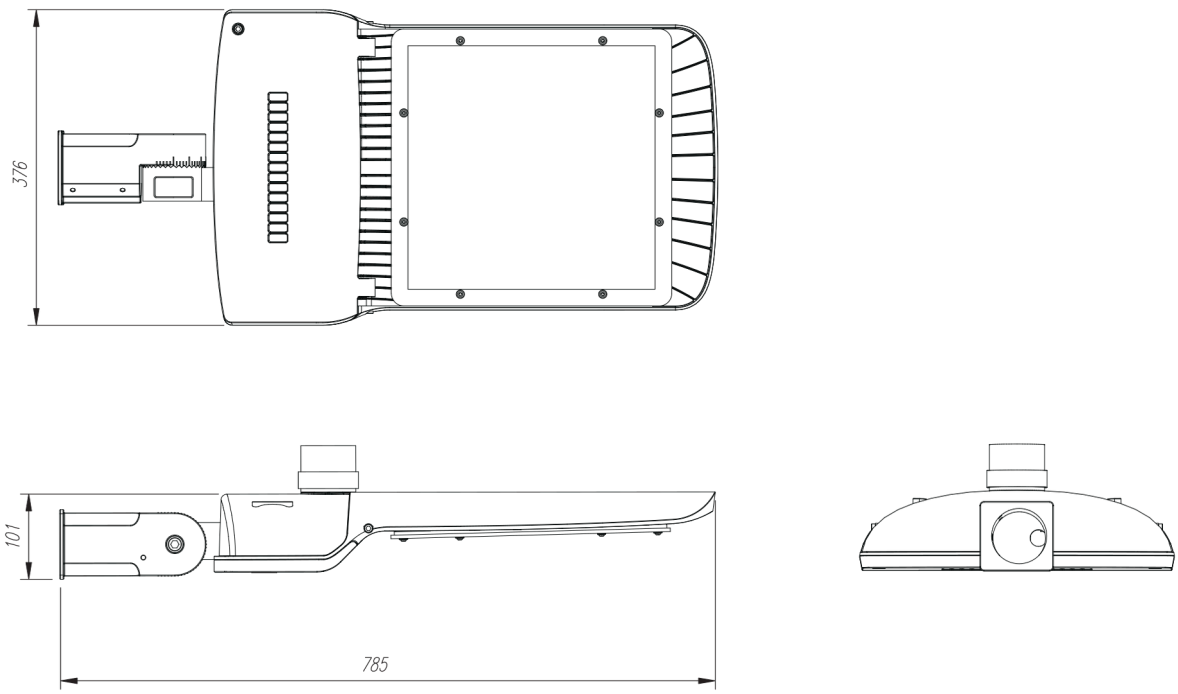

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555
E-MAIL: helpdesk@lumensdepot.com
HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


Installation

B2

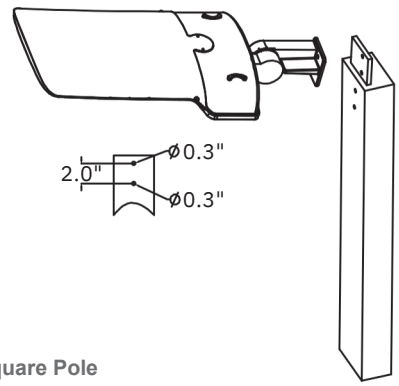


Square Pole

D2

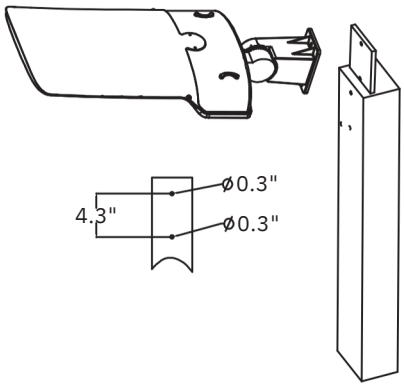


C2

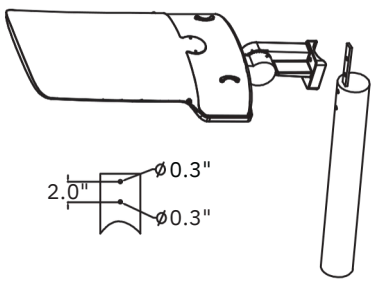


Round Pole

E2

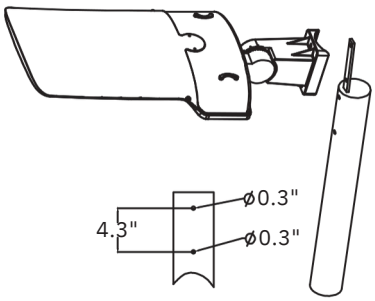


F2

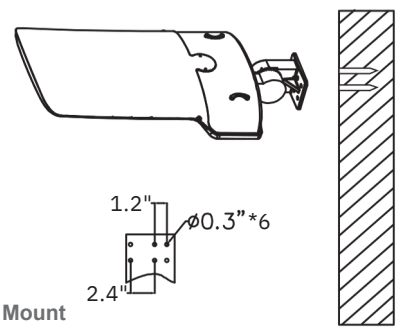

Wall Mount

A

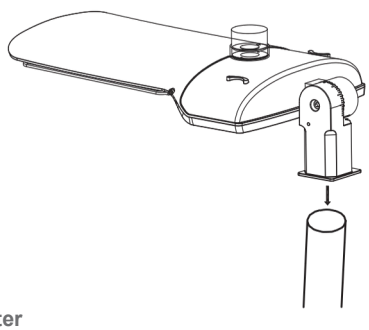


Slip Fitter


Options For Optic Lens


Type III ,Type IV ,Type V and flood lens optional

Lens Ordering Matrix





TYPE III





TYPE IV

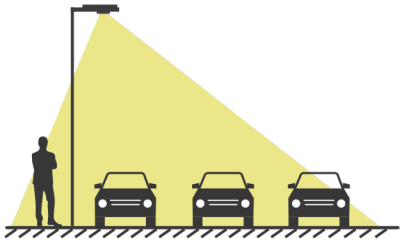



TYPE V



Lens Distribution

T3

T3 = Type III (90° X 140°)
T4 = Type IV (100° X 140°)
T5 = Type V (120°)
60 = *Flood (60 °)
30 = *Flood (30 °)


Flood Light Lens contain a Type V lighting distribution; typically used in applications with low mounting heights.


LENS QUANTITY PER FIXTURE

QTY:1for 5 0W /75W
QTY:2for 2 00W /240 W
QTY:1for 1 00W /1 5 0W
QTY: 2 for 300W

Packaging information

Wattage	Product Size(mm/in)	Package Size(mm/in)	N.W (Kg/lb)	G.W (Kg/Lbs)	QTY
50W	*507 x 308 x 81 mm 19.96 x 12.13 x 3.19 in*	*555 x 335 x 110 mm 21.85 x 13.19 x 4.33 in*	*4.1 Kg(9.04 lb)*	*4.9 Kg(10.80 lb)*	*1 PCS*
75W	*507 x 308 x 81 mm 19.96 x 12.13 x 3.19 in*	*555 x 335 x 110 mm 21.85 x 13.19 x 4.33 in*	*4.1 Kg(9.04 lb)*	*5.2 Kg(11.46 lb)*	*1 PCS*
100W	*565x 375 x 82 mm 22.24 x 14.76 x 3.23 in*	*615 x 395 x 110 mm 24.21 x 15.55 x 4.33 in*	*5.0 Kg(11.0 lb)*	*5.9 Kg(13.01 lb)*	*1 PCS*
150W	*565x 375 x 82 mm 22.24 x 14.76 x 3.23 in*	*615 x 395 x 110 mm 24.21 x 15.55 x 4.33 in*	*5.0 Kg(11.0 lb)*	*5.9 Kg(13.01 lb)*	*1 PCS*
200W	*785 x 376 x 101 mm 30.91 x 14.80 x 3.98 in*	*820 x 400 x 130 mm 32.28 x 15.75 x 5.12 in*	*9.8 KG(21.61 lb)*	*11 Kg(24.25 lb)*	*1 PCS*
240W	*785 x 376 x 101 mm 30.91 x 14.80 x 3.98 in*	*820 x 400 x 130 mm 32.28 x 15.75 x 5.12 in*	*9.8 KG(21.61 lb)*	*11 Kg(24.25 lb)*	*1 PCS*
300W	*785 x 376 x 101 mm 30.91 x 14.80 x 3.98 in*	*820 x 400 x 130 mm 32.28 x 15.75 x 5.12 in*	*10.3 KG(22.70 lb)*	*11.5 Kg(25.35 lb)*	*1 PCS*

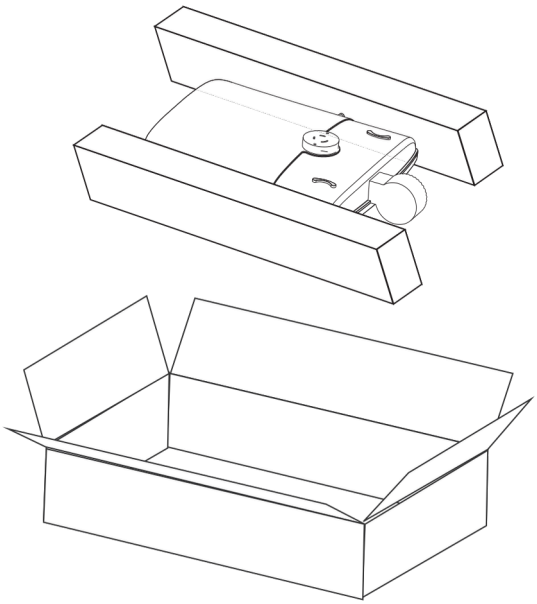

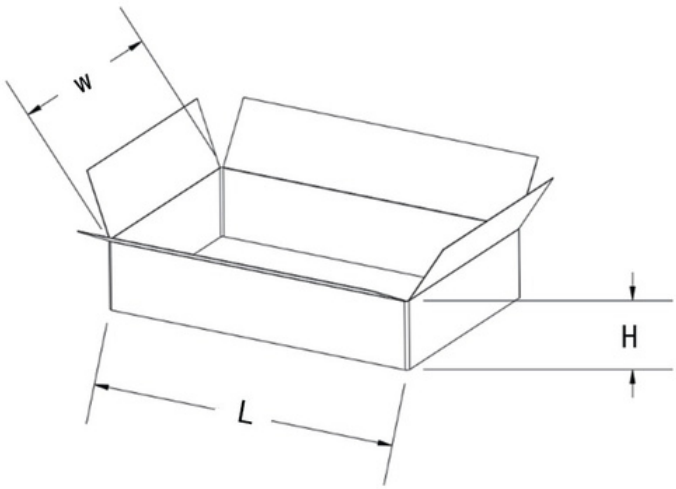

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA