


Acorn Post Top Light



Specifications

Wattage	30W- 50W- 60W	60W- 80W- 100W Max	60W- 80W- 100W Max
Light Output	Max 3600lm	11000lm	11000lm
CCT	3000K / 4000K / 5000K 3CCT Selectable		
LED Chip	SMD 3030, Lumileds or Other LED Brands		
Efficacy	110LM/W (Can customize higher LM/W if needed)		
AC Input Voltage	120~277V / AC120-347V / 277~ 480V		
Light Distribution	Type V		
Exclusive Feature(1)	Button Photocell Sensor Available		
Exclusive Feature(2)	Acrylic Diffuser / PC Diffuser Optional		
Exclusive Feature(3)	3CCT / Power Tunable Available		
Ambient Temperature	-40°C to +45°C(-40°F to +113°F)		
Total Harmonic Distortion (THD)	<20%		
Lifetime	50,000H		
IP Rating	IP65		
Warranty	5 years		

Features



CCT Select



Power Select



Photocell sensor



ADC12 Die casting

Button Photocell Sensor (Optional)



Photocell Sensor

CCT Select & Power Select





CCT Switch

Power Switch

60W-80W-100W

Dimension

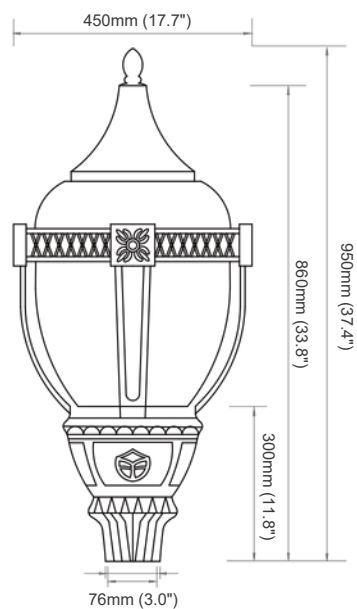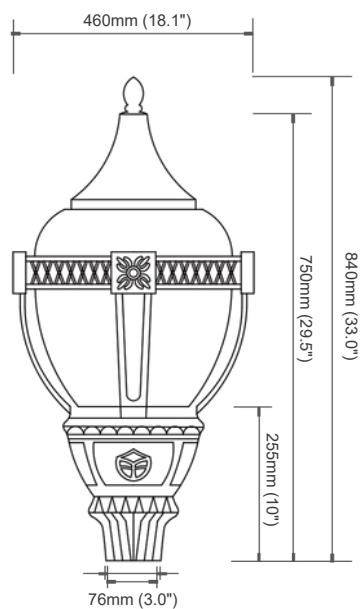

Applications




Street / Walkway




Community

Light Distribution

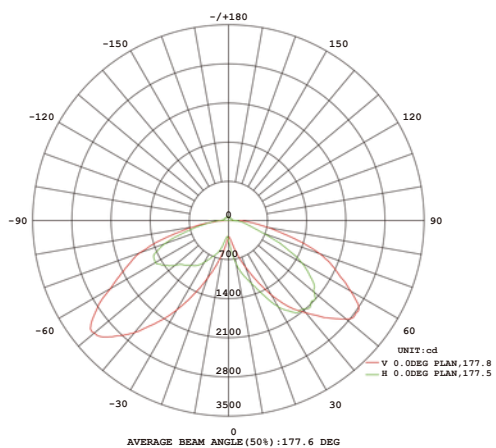

Installation



Double



Single

Packaging information

Package Size(mm/in)	N.W (Kg/lb)	G.W (Kg/lb)	QTY/BOX
530 x 530 x 680 mm 20.86 x 20.86x 26.77 in	6.7 Kg(14.8 lbs)	9.0 Kg(19.8 lbs)	1 PCS
530 x 530 x 680 mm 20.86 x 20.86x 26.77 in	7.9 Kg(15.2 lbs)	9.2 Kg(20.3 lbs)	1 PCS
530 x 530 x 930 mm 20.86 x 20.86x 36.61 in	10.2 Kg(22.5 lbs)	12.8 Kg(28.2 lbs)	1 PCS

Carton Box

