LED Wall Pack Light

15W / 25W / 50W / 70W / 90W



IP65

5 year warranty

Specification

Wattage	15W / 25W / 50W / 70W / 90W
Power Factor	≥0.95
LED Chip (optional)	SMD 3030, Philips or other LED chip
Driver Brand	Meanwell / SOSEN/ Other Brand
CCT	3000K / 4000K / 5000K / 6000K / 3CCT Switch
Lumen	1950LM / 3100LM / 6200LM / 9100LM / 11500LM
AC Input Voltage	100-277V / 120-347V / 180-480V
Exclusive Feature (optional)	CCT & Power selectable
Material	Aluminum alloy + PC optic lens
Housing color	Dark Bronze / Black / Gray / White
Ambient Temperature	-40℃ ~ 45℃ (-40℉ ~ 113℉)
Total Harmonic Distortion	＜20%
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years

LUMENS DEPOT
PRO LIGHTING SOLUTION

Tel: +18007658555 E-Mail: helpdesk@lumensdepot.com https:www.lumensdepot.com
Address: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

Features



CCT Select



Power Select



BLE Mesh




Daylight sensor



ADC12 Die casting

Semi Cut Off (Forward Throw)

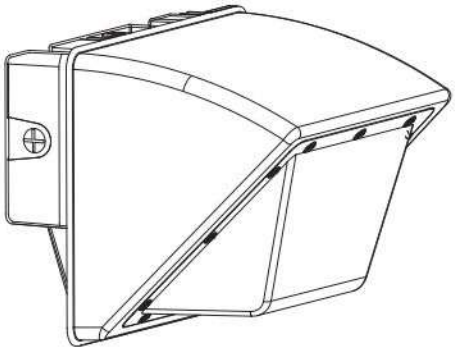


Sensor (Daylight sensor available)



Daylight Sensor

Fine heat sink design , fine heat dissipation

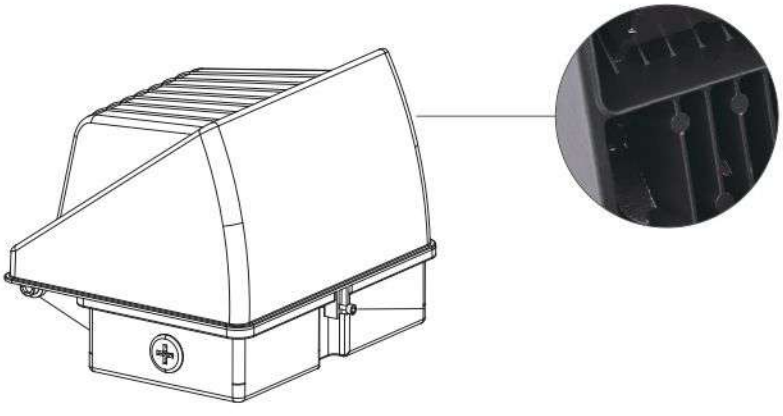



Applications



Gas Station



Back Yard



Parking Area




Shopping Center




Warehouse

Light Distribution

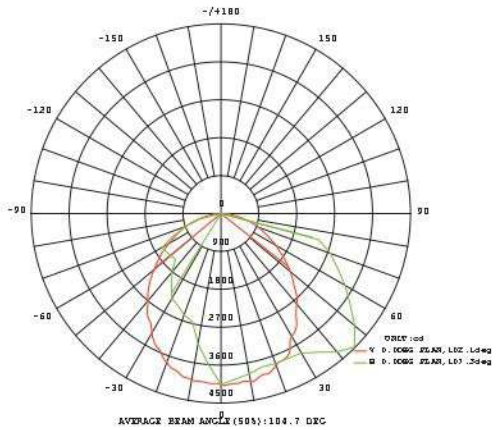



Light Distribution





WL 196







WL 268

Installation


1.Remove M3x12mm locking screw with 3mm allen wrench on fixture to open the fixture

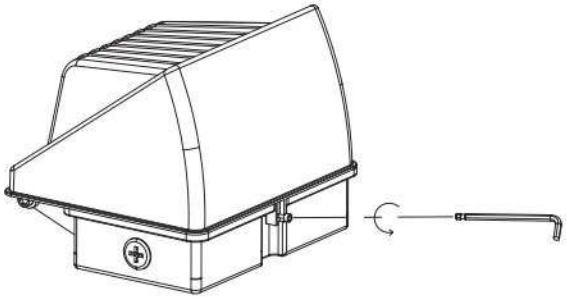


2.Drill 2 holes (0.125 inch) through fixture, and 2 holes into mounting surface using drill template. Drive wall anchors into holes. Attach the fixture to wall with using 2 screws (not included).

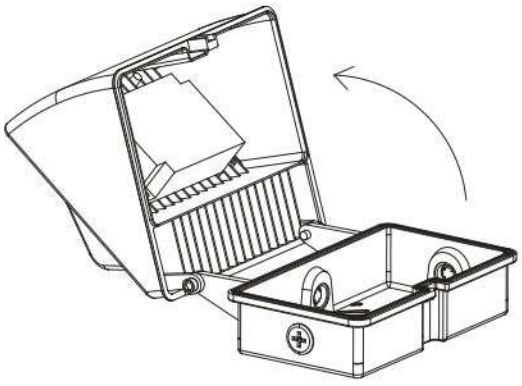



3.Remove Knockout Plug and attach conduit.

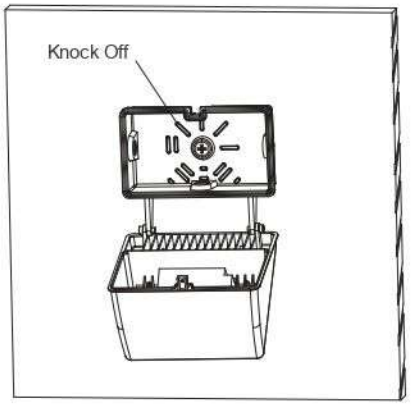


4. Pull wires from conduit through knockout and make wire connections to main supply. Black to Line, White to Neutral, and Green to Ground. Consult an electrician and install according to national, local, and state codes.

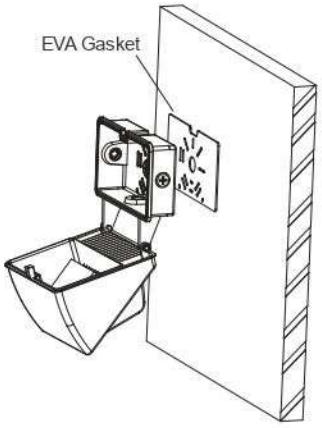


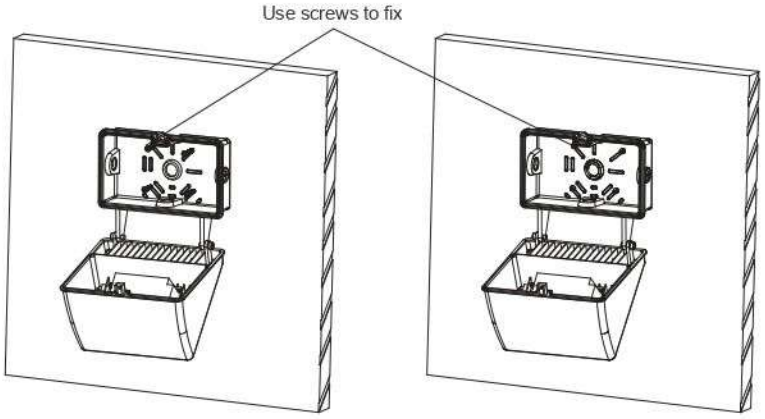

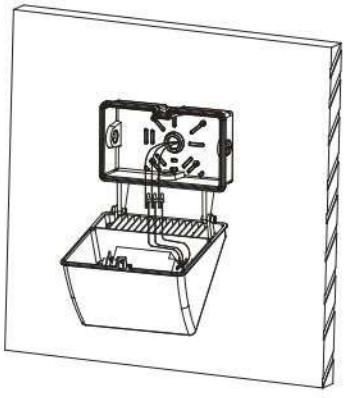

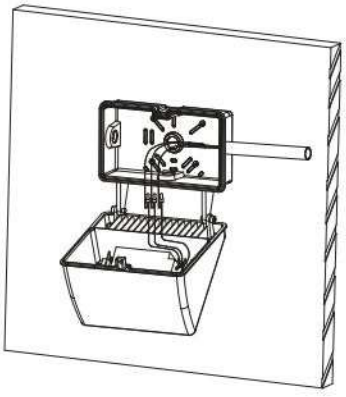


5. Close hatch and tighten M3x12mm locking screw with 3mm allen wrench.

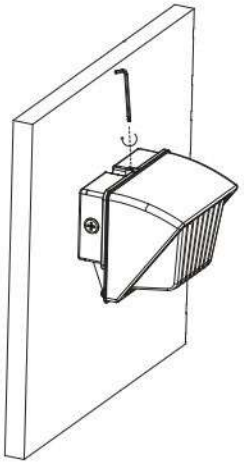


Packaging information

Wattage	Product Dimension (mm/in)	Carton Box Dimension	N.W (Kg/lb)	G.W (Kg/lb)	QTY / CTN
15W	196 × 166 × 148mm 7.71 × 6.53 × 5.83 in	260 × 230 × 220mm 10.24 × 9.06 × 8.66 in	1.7Kg(3.75lb)	2.2kg(4.85lb)	1 PCS
25W	196 × 166 × 148mm 7.71 × 6.53 × 5.83 in	260 × 230 × 220mm 10.24 × 9.06 × 8.66 in	1.7Kg(3.75lb)	2.2kg(4.85lb)	1 PCS
50W	196 × 166 × 148mm 7.71 × 6.53 × 5.83 in	260 × 230 × 220mm 10.24 × 9.06 × 8.66 in	1.7Kg(3.75lb)	2.2kg(4.85lb)	1 PCS
70W	273 × 214 × 224mm 10.71 × 8.40 × 8.78 in	350 × 330 × 310mm 13.78 × 12.99 × 12.20 in	4.3KG(9.48lb)	5.0kg(11.02lb)	1 PCS
90W	273 × 214 × 224mm 10.71 × 8.40 × 8.78 in	350 × 330 × 310mm 13.78 × 12.99 × 12.20 in	4.3KG(9.48lb)	5.0kg(11.02lb)	1 PCS

Protection

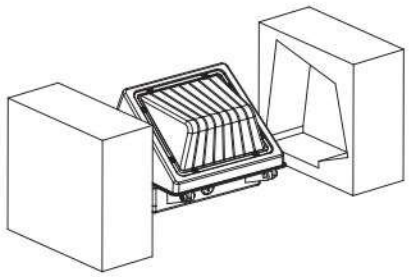



Package





150W Spectrum Test Report

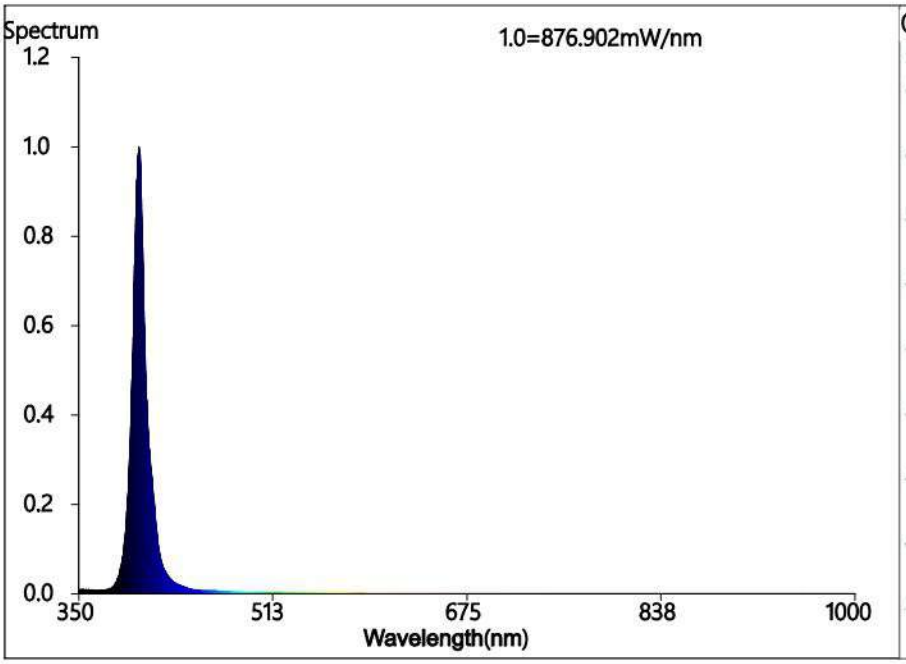

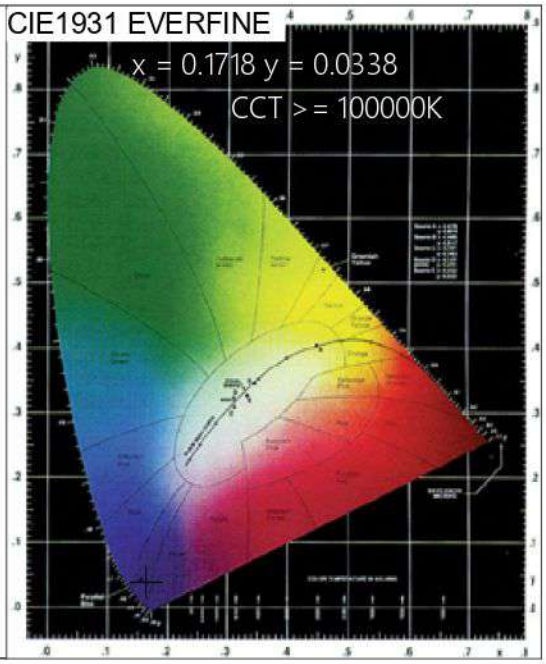

Color Parameters:

Chromaticity Coordinate:x=0.1718 y=0.0338/u'=0.2244 v'=0.0994

CCT=100000K(Duv=-0.2044) Dominant WL:Ld =445.1nm WL:Lc = --nm Purity=93.7%

Ratio:R=5.4% G=57.6% B=37.0% Peak WL:Lp=400.4nm FWHM=10.9nm

Render Index:Ra=13.7 AvgR=18.2 TM30:Rf=0 Rg=-59

Eff(PPF)=0.36920

R1 =44	**R2 =25**	**R3 =0**	**R4 =0**	**R5 =41**	**R6 =0**	**R7 =0**	
R8 =0	**R9 =0**	**R10=0**	**R11=0**	**R12=0**	**R13=74**	**R14=7**	**R15=81**

Photo Parameters:

Flux = 66.63 lm Eff. : 0.94 lm/W Fe = 13.28 W

Photosynthetic:PPF:26.304umol/s PAR WATT:7658mW(400-700nm)

Electrical parameters:

V = 120.03 V I = 0.6289 A P = 71.25 W PF = 0.9439

LEVEL:OUT WHITE:OUT

Packing

	Qty/ctn	Material	N.W.	Box Size	G.W.
80W	1	K=K	1.8Kg	310X90X350mm	2.0Kg
	4	K=K	7.5Kg	385X325X370mm	9.0Kg

	Qty/ctn	Material	N.W.	Box Size	G.W.
100W	1	K=K	1.96Kg	310X90X350mm	2.3Kg
	4	K=K	8.0Kg	385X325X370mm	10.5Kg

	Qty/ctn	Material	N.W.	Box Size	G.W.
150W	1	K=K	3.15Kg	315X115X350mm	3.5Kg
	4	K=K	13.5Kg	495X335X370mm	15.0Kg

Instruction	1PCS	Thanking card	/
Fluorescent tape	6PCS	Power line	/

