

LED WALL PACK LIGHTS

LUMENS DEPOT LED Wall Pack Lights deliver a bright 7,800lm daylight white light with 5000k color temperature, efficiently replacing 600-800W MH/HIP/HID bulbs while saving up to 85% in energy. Featuring durable die-cast aluminum for excellent heat dissipation and a service life of over 50,000 hours, it includes a dusk-to-dawn photocell for automatic operation, enhancing outdoor security and perimeter lighting. With IP65 waterproof, it's suitable for all weather conditions and offers three easy installation methods, including a J-BOX surface mount. Backed by a 5-year warranty.




SPECIFICATION

- Output Lumens: 7,800lm
- Input Power: 60W
- Input Voltage: AC100-277V
- 130 LPW
- Color Temperature: 5000K
- Beam Angle: 120°
- Dimming: 0-10V Dimmable
- With Photocell sensor
- Die cast aluminum, comes in a bronze powder coat finish
- High reliable constant current LED driver
- IP Rating: IP65
- Operating temperature: -40°C to 40°C (-40°F to 104°F)
- Warranty: 5-Year

RECOMMENDED USE

- Site Lighting
- Security Lighting
- Pathways
- Entrances
- Perimeters
- Job sites
- Construction sites
- Mines
- Courtyard

DIMENSION

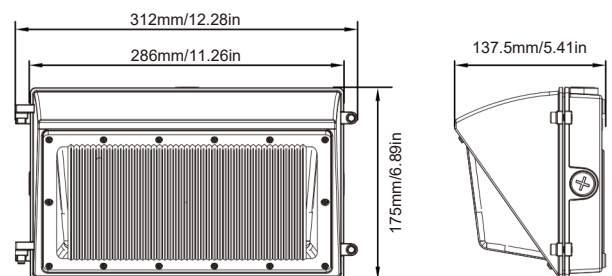

LED WALL PACK LIGHTS

LUMENS DEPOT LED Wall Pack Lights deliver a bright 15,600lm daylight white light with 5000k color temperature, efficiently replacing 600-800W MH/HIP /HID bulbs while saving up to 85% in energy. Featuring durable die-cast aluminum for excellent heat dissipation and a service life of over 50,000 hours, it includes a dusk-to-dawn photocell for automatic operation, enhancing outdoor security and perimeter lighting. With IP65 waterproof, it's suitable for all weather conditions and offers three easy installation methods, including a J-BOX surface mount. Backed by a 5-year warranty.



SPECIFICATION

- Output Lumens: 15,600lm
- Input Power: 120W
- Input Voltage: AC100-277V
- 130 LPW
- Color Temperature: 5000K
- Beam Angle: 120°
- Dimming: 0-10V Dimmable
- With Photocell sensor
- Die cast aluminum, comes in a bronze powder coat finish
- High reliable constant current LED driver
- IP Rating: IP65
- Operating temperature: -40°C to 40°C (-40°F to 104°F)
- Warranty: 5-Year

RECOMMENDED USE

- Site Lighting
- Security Lighting
- Pathways
- Entrances
- Perimeters
- Job sites
- Construction sites
- Mines
- Courtyard

DIMENSION

