


LED PANEL LIGHT

FEATURES AND SPECIFICATIONS

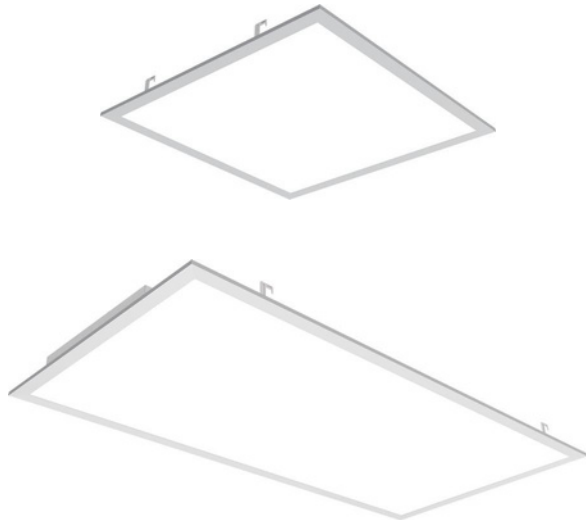

Construction

- Integrative aluminum frame provides a durability structure
- Sealed housing, prevents dust and without light leak
- 5 Wattage and 5 CCT selectable switches are integrated on the driver
- Minimize Stock, 1SKU can cover Max. of 25 Models

Electrical

- Input Voltage: 120-277Vac 50/60Hz
- 0-10V dimmable,
- THD≤10%, PF≥0.95

Applications

- Offices, Retail, Schools, restaurants, and residential applications.

Installation

- Fixture issuitable for recessed mounting with T-bar, and accessories for suspension and surface mounting are also available. Usein ambient temperatures ranging from -20°C to 45°C

Listing

- ETLlisted, suitable for damp location.
- DesignLights Consortium ®(DLC)Premium.

Warranty

- 5-yearlimited warranty

Specs at a Glance

* Nominal Wattage (Switchable)

Configuration	JEN-B2-S40-3065	JEN-B4-S72-3065
CCT (K)	3000K-3500K-4000K-5000K-6500K(Switchable)	
Wattage (W)*	20W/25W/30W/ 35W/40W WattageAdjustable	30W/40W/50W/ 60W/72WWattage Adjustable
Lumens (lm)	2,500-5,000LM	3,750-9,000LM
Efficacy (LPW)	Upto130	Upto130
CRI	≥80	
Input Voltage	120-277VAC, 50/60Hz, 0-10V Dimmable	
Operating Temp	-20°C to 45°C	
Certifications	ETL DLC 5.1 Premium	
Warranty	5 Years	


LED PANEL LIGHT

Ordering information

Description

	2' x 2' Backlit Panel, Power Switchable 20W/25W/30W/35W/40W, Color Switchable 3000K/3500K/4000K/5000K/6500K, 120-277VAC
	2' x 4' Backlit Panel, Power Switchable 30W/40W/50W/60W/72W, Color Switchable 3000K/3500K/4000K/5000K/6500K, 120-277VAC

Detail


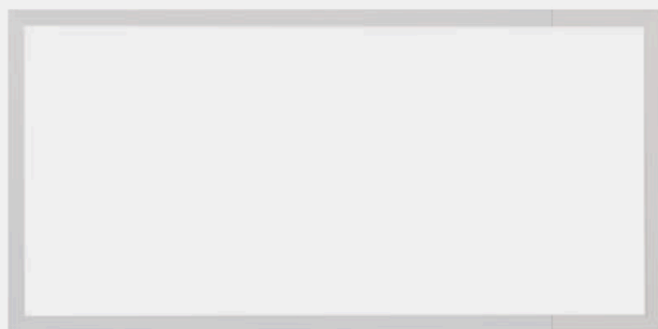


5-in-1 Color Temperature
(3000K 3500K 4000K 5000K 6500K)
5-in-1 Wattage (30 40 50 60 72W)
Hassle-Free Set up
0-10V Dimming
Support Emergency, Sensor, Bluetooth

5 Wattage and 5 CCT
selectable switches



Dimensions

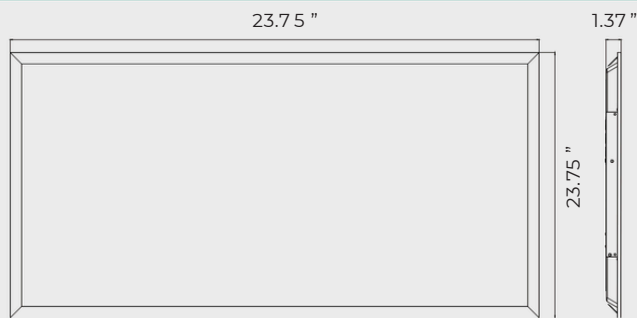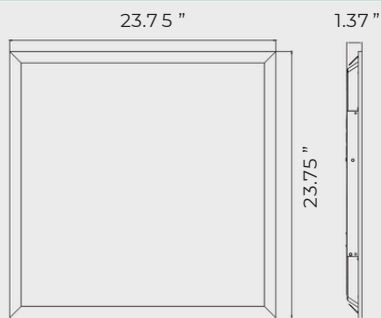

LED PANEL LIGHT

Accessories (Sold Separately)




Suspension mounting kits



Emergency Battery Backup



Sensor





Surface mount kit

Flexible Installation Options


Cable Mount Kit

Optional Y cable mounting kit allows for suspended installations from any ceiling type. (2 pcs/kit)





Surface Mount Kit

Optional surface mount kit allows for installation on plaster or other hard ceilings.




Wiring Diagram

Power regulation
CCT adjustment

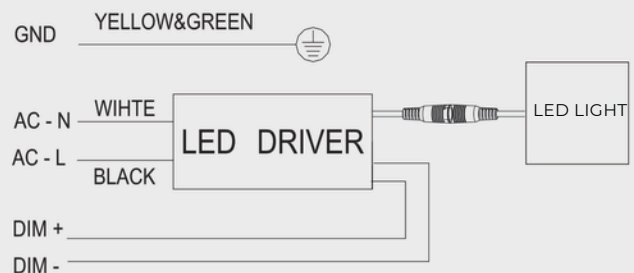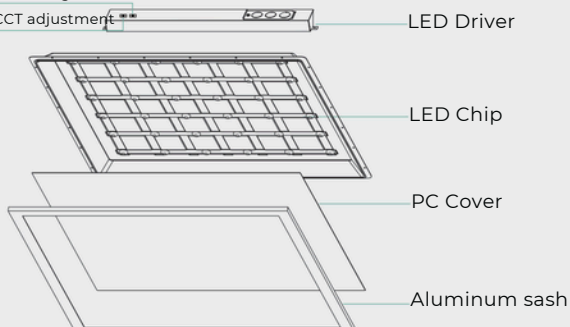

LED PANEL LIGHT


Installation Instruction

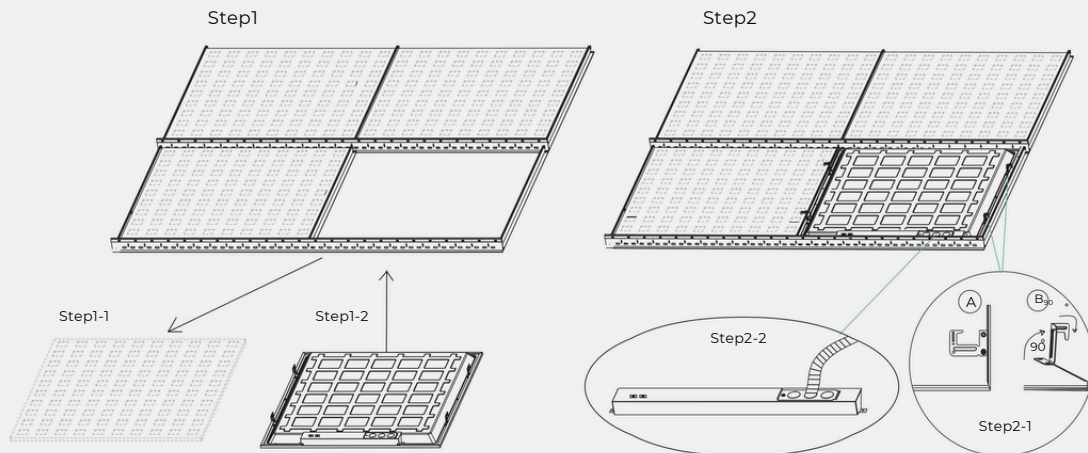

Packing/Weight


Size/ft	L /inch	W /inch	H /inch	QTY/ctn	G.W./lbs	CTN QTY/pallet
2x2'	25.2	25.2	6.5	4	16.23	144pcs
2x4'	49.2	25.2	6.5	4	39 . 30	72pcs

Emergency Backup

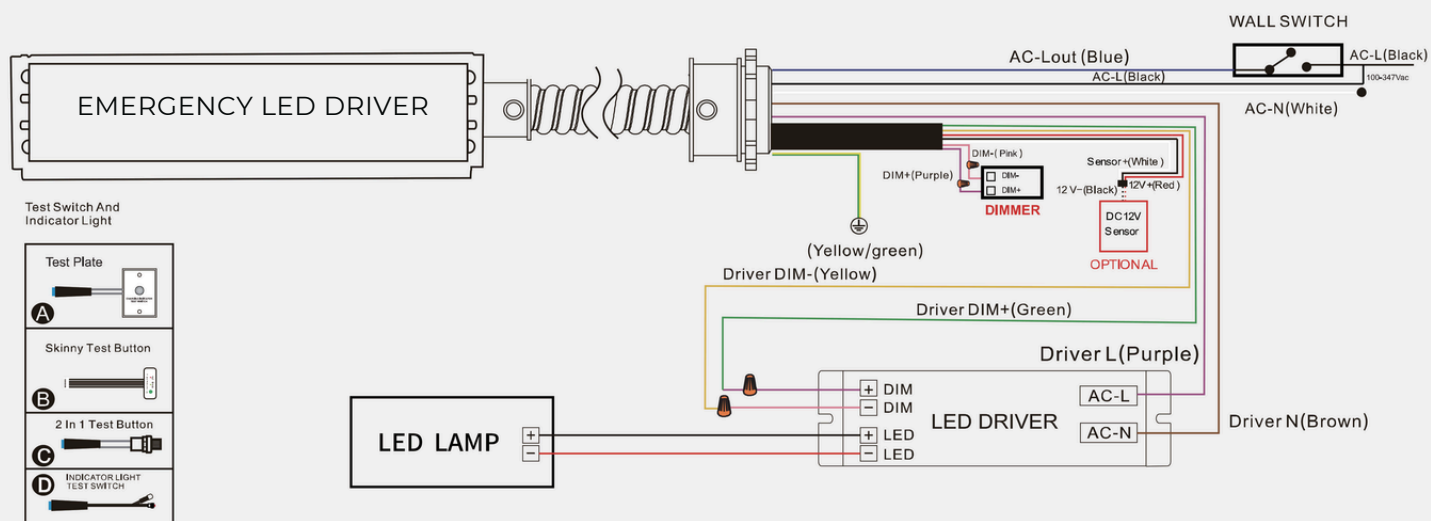


Ceiling Frame Installation

Figure 1



1) .Assembling the frame as shown in the figure.

Figure 2



1) .Screwing up three frames as picture shown.

Figure 3


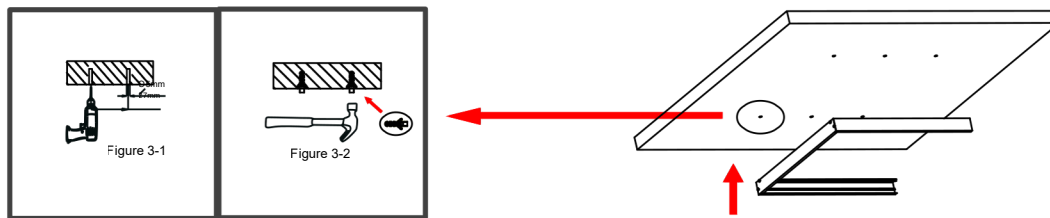


Figure 3-3


- 1) .Marking the hole site on the ceiling according to the hole site of the frames;
- 2) .Screw up the frames to the ceiling as shown in the figure.

Figure 4




1) The 3 sides of the frames fixed on the ceiling.

Figure 5

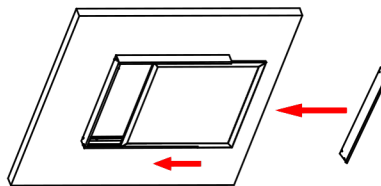

1)Put the panel light into the fixed frame as the figure shown.◆

Figure 6



1)Screw up the last piece of the frames.