

LED MODULES



White



RGB

Features

- IP68Rated.
- Multiple application for 7-18cm lighting box channel letters and signs.
- Crystal Lens on LED's for LED Chip Protection.
- One Unit PVC Injection Molding Case.
- Average Wattage Consumption up to 1.2W per Module.

Input Voltage

- 12V DC.

Application

- Channel Letters
- Thin and Thick Light Boxes
- Around Ceiling Molding.
- Under Cabinets.

Qualifications




LED MODULES

Specifications

Watts	Color	Qualified	Lumens	CCT	Size	LED Type
1.1W	White	CE & ROHS	110lm/module	10000K	25'/50Pcs	Samsung
1.1W	White	CE & ROHS	132lm/module	6500K	25'/50Pcs	Samsung
.72W	RGB	CE & ROHS	N/A	N/A	25'/50Pcs	Epistar
.72W	W/ Diffuse	CE & ROHS	58lm/module	6500K	25'/50Pcs	Samsung
.72W	Red w/ Diffuse	CE & ROHS	66lm/module	N/A	25'/50Pcs	Epistar
.72W	G/ Diffuse	CE & ROHS	66lm/module	N/A	25'/50Pcs	Epistar
.72W	B/ Diffuse	CE & ROHS	66lm/module	N/A	25'/50Pcs	Epistar

Drawing

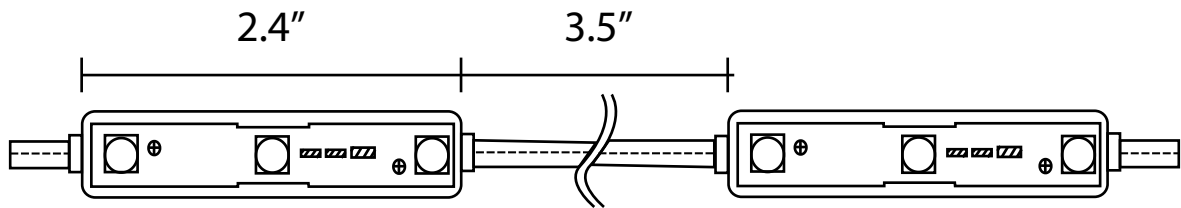

Packaging



Contents of Each Bag:

- 50 Modules
- 25 Ft in Length