


GONDOLA LIGHT

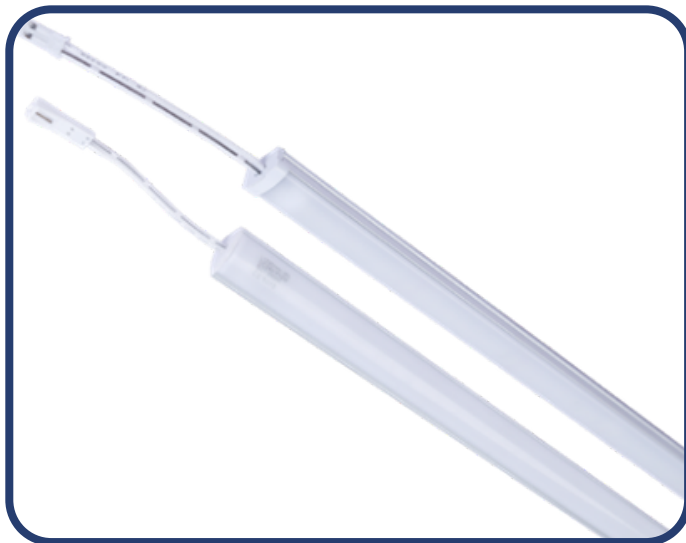

Lumens Depot Foam's LED Gondola Shelf Light is an ideal solution for enhancing product visibility and presentation in retail environments. Designed to make displays more attractive and engaging, it helps products stand out and improves the overall shopping experience.

Featuring magnetic LED strips for quick and easy installation, this system delivers bright, uniform illumination across shelves and displays. With a cool white 6500K color temperature and wide beam angle options, it creates a clean, well-lit environment while maintaining energy efficiency.

The 4ft LED strips operate at 12W per strip and are perfect for gondolas, shelving units, and retail displays. Available with 120° or V-shape 90° beam angles, they provide flexible lighting options for different display needs. Each kit includes multiple shelf lights, a magnetic strip, power supply, and connectors—offering a complete, convenient solution for retail lighting setups.

Product Features

- 4FT Magnetic LED Strip
- 12 Watt/Strip
- CCT 6500K
- Input Voltage 24V DC
- 120° Beam Angle
- V Shape 90° Beam Angle
- 4 x 4 FT LED Shelf Lights
- 1 x 4 FT Magnetic Strip
- 1 x 96W Power Supply
- 1 x 4 Connectors
- UL Listed

GONDOLA LIGHT

WATT	MAX LUMENS	CCT	INPUT VOLTAGE	CRI	SIZE	LIGHT SPREAD	CONSTRUCTION	SHAPE	CERTIFICATIONS
12W	600	6500K	24V DC	>80	4'	120°	Aluminum+PC	Straight	UL
12W	560	6500K	24V DC	>80	4'	90°	Aluminum+PC	V-Shape	UL

Specifications

Parameter	Description	Value
General Performance	Model #	OY101
	Watt	12W/M
	Max Lumens	600
	Lumen Efficacy	Up to 50LM/W
	Color Temperature	6500K
	CRI (Ra)	>80
	Light Spread	120o
Electrical	Diffuser Type	AI+PC Cover
	Input Voltage	110V DC
	Output Voltage	24V
	Frequency	50/60Hz
	Adapter	Power Supply 96W
Physical	Dimming	No
	Shape	Straight
	LED Brand	San'an
	LED Type	SMD2835
	LED QTY	160 PCS
Qualification	Construction	AI+PC Cover
	Housing Color	White
	IP Rating	IP20
	Warranty	2 Years Warranty


GONDOLA LIGHT

Specifications

Parameter	Description	Value
General Performance	Model #	OY1616
	Watt	12W/M
	Max Lumens	560
	Lumen Efficacy	Up to 50LM/W
	Color Temperature	6500K
	CRI (Ra)	>80
	Light Spread	90o
	Diffuser Type	Al+PC Cover
Electrical	Input Voltage	110V DC
	Output Voltage	24V
	Frequency	50/60Hz
	Adapter	Power Supply 96W
	Dimming	No
Physical	Shape	V - Shape
	LED Brand	San'an
	LED Type	SMD2835
	LED QTY	160 PCS
	Construction	Al+PC Cover
Qualification	Housing Color	White
	IP Rating	IP20
	Warranty	2 Years Warranty



GONDOLA LIGHT

Correlated Color Temperature (CCT)


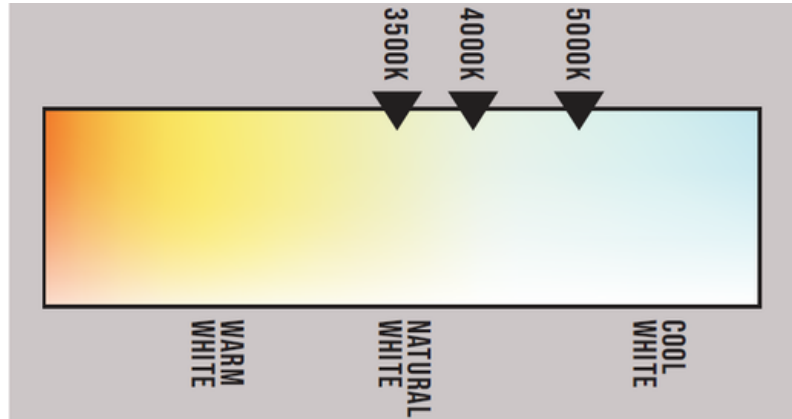


Dimension


Magnetic Light Strip

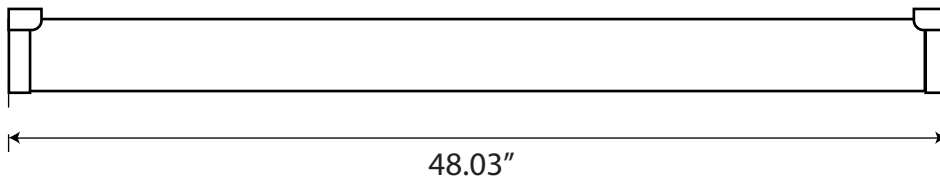

Magnetic light strip

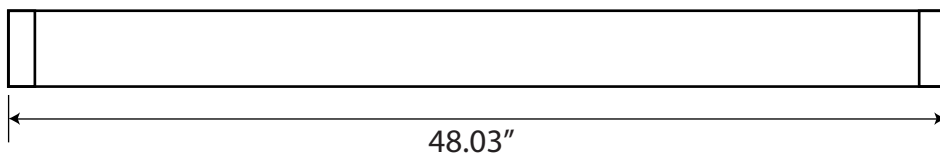



Accessories

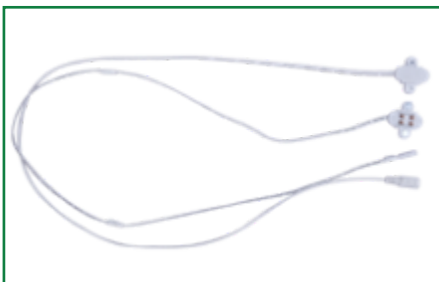


GONDOLA LIGHT

Installation


- 1, Unpacking the carton, find below the components ① Track*1pcs ② Track-LED Bar Connector*4pcs ③ LED Bar*4pcs ④ Power Supply-Track Connector*1 ⑤ . DC Power Supply.

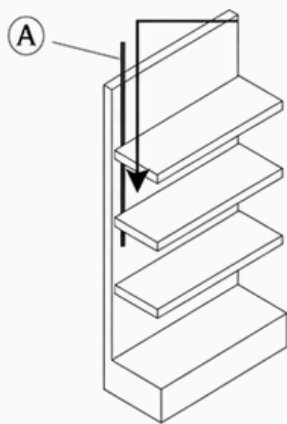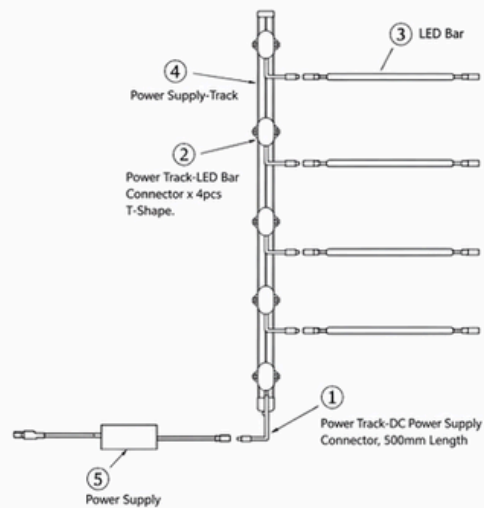


- 2, From top, slide the ① Track between the shelves and back wall, place it at a position which is convenient to connect all led bars

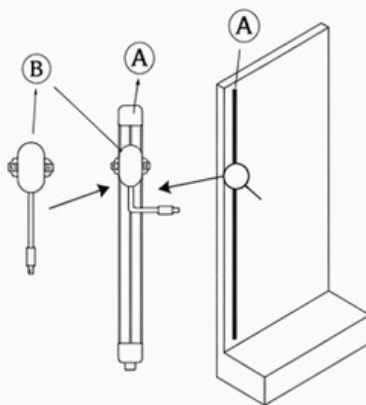

- 3, Clip the magnetic ② Track-LED Bar Connector onto the ① Track and fix the ① Track

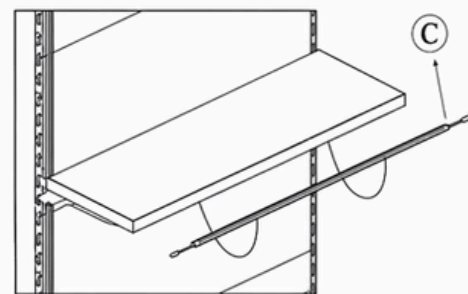


- 4, Attach the magnetic ③ LED Bar under shelves

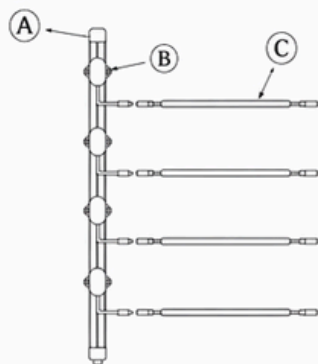


- 5, Connect the ② Track-LED Bar Connector with ③ LED Bar, organize the wire by using the small magnet on it

OR

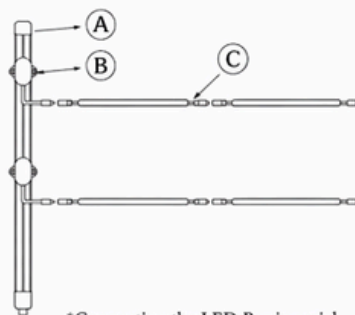

*Connecting the LED Bar in serial

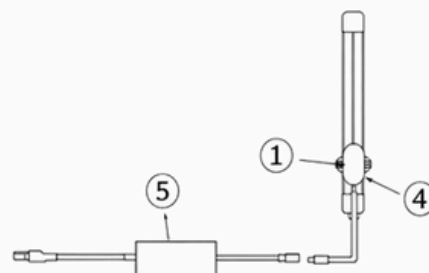

- 6, Use the ① Power Supply-Track Connector connect the ① Track and ⑤ Power Supply, afterwards connecting the ⑤ DC Power Supply to AC power.

GONDOLA LIGHT

Packaging

Size	Box Dimension	Qty	Net Weight	Gross Weight
4FT	55.11" x 13.18" x 9.28"	4 Pcs/Box	4LBS	4.51LBS
4FT	55.11" x 13.18" x 9.28"	4 Pcs/Box	4LBS	4.51LBS

Application Image



GONDOLA LIGHT

Application Image

