

LED HIGH BAY LIGHTS

Lumens Depot's HB Series LED High Bay Light features selectable wattage settings of 100%, 80%, and 60%, allowing you to customize the light output for different applications. Its 0–10V dimming capability provides precise brightness control while supporting greater energy savings. Featuring a modern design, IK08 impact resistance, and an IP65 weatherproof rating, this fixture is built to perform reliably in demanding commercial and industrial environments. DLC, ETL, FCC, and RoHS approved, it delivers dependable quality and is backed by a generous 5-year warranty.




SPECIFICATION

- Max Delivered Lumens: 22,500lm
- Input Power: Selectable 150W (100%) - 120W(80%) - 90W(60%)
- Input Voltage: AC100-277V
- Dimmable: 0-10V
- 150 LPW
- CRI: ≥ 70
- Operating Temperature Range: -31°F to 122°F (-35°C to 50°C)
- Estimated L70 Lifetime @ 25°C (77°F): >70,000
- Power Factor: >0.9 at full load
- Total Harmonic Distortion: <20% at full load
- Waterproof Rating: IP65
- Limited Warranty: 5-Year

RECOMMENDED USE

- Auto Dealerships
- Commercial
- Gymnasiums
- Industrial
- Manufacturing
- Storage Facilities
- Warehouses

DIMENSION

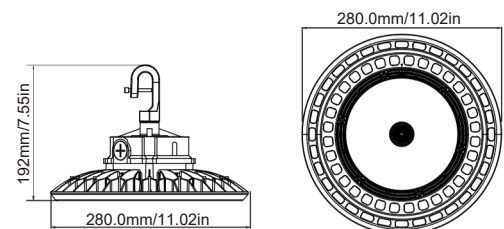

150W(120W/90W)

Lumens Depot's HB Series LED High Bay Light offers selectable wattage settings of 100%, 80%, and 60%, allowing you to customize the light output for different applications. Its 0–10V dimming capability provides precise brightness control while helping reduce energy consumption. Featuring a modern design, IK08 impact resistance, and an IP65 weatherproof rating, this fixture is built to perform reliably in demanding commercial and industrial environments. DLC, ETL, FCC, and RoHS approved, it delivers dependable quality and is backed by a generous 5-year warranty.




SPECIFICATION

- Max Delivered Lumens: 30,000lm
- Input Power: Selectable 200W (100%) - 160W(80%) - 120W(60%)
- Input Voltage: AC100-277V
- Dimmable: 0-10V
- 150 LPW
- CRI: ≥ 70
- Operating Temperature Range: -31°F to 122°F (-35°C to 50°C)
- Estimated L70 Lifetime @ 25°C (77°F): >70,000
- Power Factor: >0.9 at full load
- Total Harmonic Distortion: <20% at full load
- Waterproof Rating: IP65
- Limited Warranty: 5-Year

RECOMMENDED USE

- Auto Dealerships
- Commercial
- Gymnasiums
- Industrial
- Manufacturing
- Storage Facilities
- Warehouses

DIMENSION

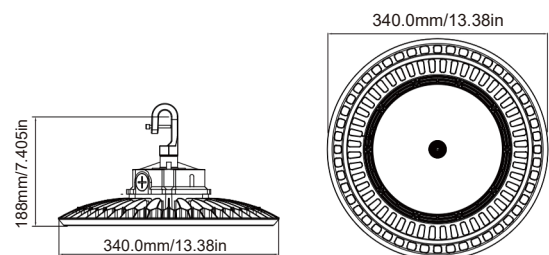

200W(160W/120W)

LUMENS DEPOT LED High Bay Light HB Series offer selectable wattage options(100%-80%-60%), allowing you to customize your lighting experience. It includes 0-10V dimming for energy conservation. This light is not only aesthetically pleasing, but also built to withstand tough conditions with its IK08 and IP65 ratings. DLC/ETL/FCC/RoHS are approval, as a testament to its exceptional quality, it comes with a generous 5-year warranty.




SPECIFICATION

- Max Delivered Lumens: 36,000lm
- Input Power: Selectable 240W (100%) - 190W(80%) - 140W(60%)
- Input Voltage: AC100-277V
- Dimmable: 0-10V
- 150 LPW
- CRI: ≥ 70
- Operating Temperature Range: -31°F to 122°F (-35°C to 50°C)
- Estimated L70 Lifetime @ 25°C (77°F): >70,000
- Power Factor: >0.9 at full load
- Total Harmonic Distortion: <20% at full load
- Waterproof Rating: IP65
- Limited Warranty: 5-Year

RECOMMENDED USE

- Auto Dealerships
- Commercial
- Gymnasiums
- Industrial
- Manufacturing
- Storage Facilities
- Warehouses

DIMENSION

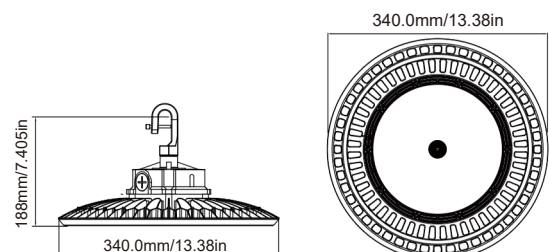

240W(190W/140W)

LUMENS DEPOT LED High Bay Light HB Series offer selectable wattage options(100%-80%-60%), allowing you to customize your lighting experience. It includes 0-10V dimming for energy conservation. This light is not only aesthetically pleasing, but also built to withstand tough conditions with its IK08 and IP65 ratings. ETL/FCC/RoHS are approval, as a testament to its exceptional quality, it comes with a generous 5-year warranty.




SPECIFICATION

- Max Delivered Lumens: 45,000lm
- Input Power: Selectable 300W (100%) - 240W(80%) - 180W(60%)
- Input Voltage: AC100-277V
- Dimmable: 0-10V
- 150 LPW
- CRI: ≥ 70
- Operating Temperature Range: -31°F to 122°F (-35°C to 50°C)
- Estimated L70 Lifetime @ 25°C (77°F): >70,000
- Power Factor: >0.9 at full load
- Total Harmonic Distortion: <20% at full load
- Waterproof Rating: IP65
- Limited Warranty: 5-Year

RECOMMENDED USE

- Auto Dealerships
- Commercial
- Gymnasiums
- Industrial
- Manufacturing
- Storage Facilities
- Warehouses

DIMENSION

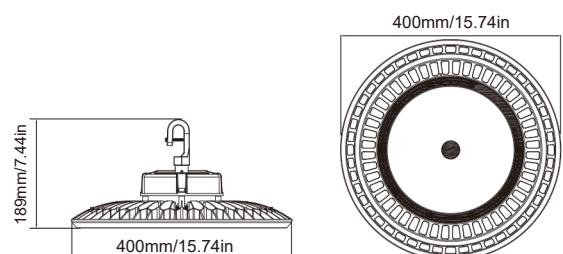

300W(240W/180W)