

LED UFO PRO LIGHT



Features

- Super-Thin Aluminum Heatsink
- Microwave Motion Sensor Function
- Remote Control, 0–10V Dimmable
- 100–277VAC / 120V ±10% Input
- SMD3030 LED Chips, 150 LM/W
- 6kv High-Voltage Surge Test Approved
- 120° Beam Angle
- High Power Factor >0.9, Low THD Driver
- Excellent Heat Dissipation
- At Least 50% Energy Savings
- UL, cUL & DLC Approved
- 5-Year Warranty
- Easy Installation
- Waterproof and Durable
- Energy Saving




Application

The LED UFO PRO Light Series is widely used in supermarkets, garages, factories, workshops, highway toll stations, gas stations, exhibition halls, and other commercial and industrial lighting applications.




Series	Lumens	Wiring	Beam Angle (Degree)	Electrical Data	LED Type	Color temperature	Color rendering index
120W	15000 Lm	ACL(Black) ACN(White) GND(Green)	120 degree	Input Voltage 100-277V 50~60Hz Power Factor(%)>90	SMD 3030 Chips	WW 3000 K NW 4000 K DW 5000 K CW 5700 K	Ra>70 Ra>80 Ra>90
150W	22500 Lm						
200W	30000 Lm						
240W	36000 Lm						
300W	45000 Lm						

DIMENSIONS

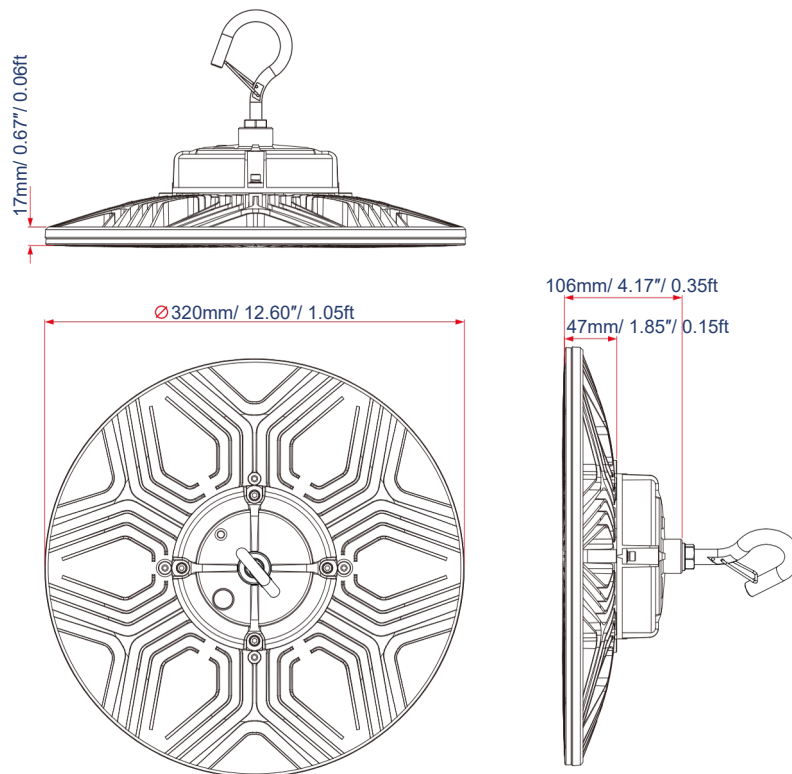


120W/150W/200W

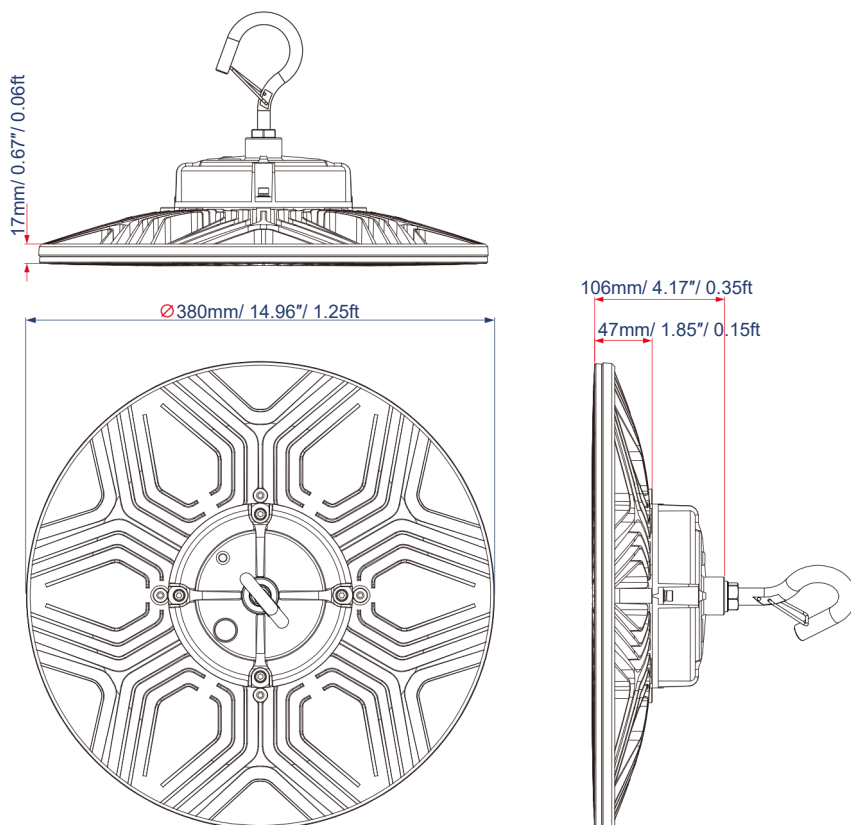


240W/300W

INSTALLATION INSTRUCTIONS


1. Open the box and take out the LED light and ring.
2. Install the ring into the light body as following diagram.

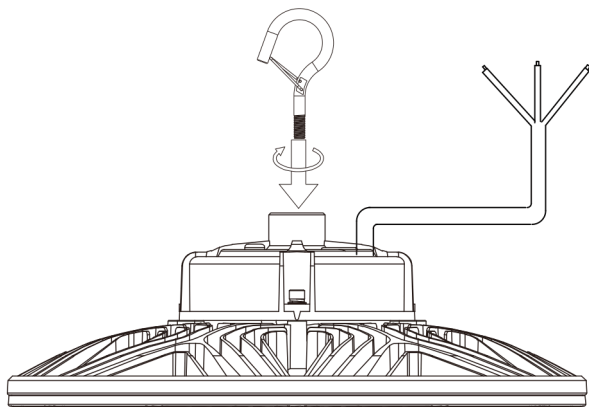

3. Hung the LED light with a sturdy hook.

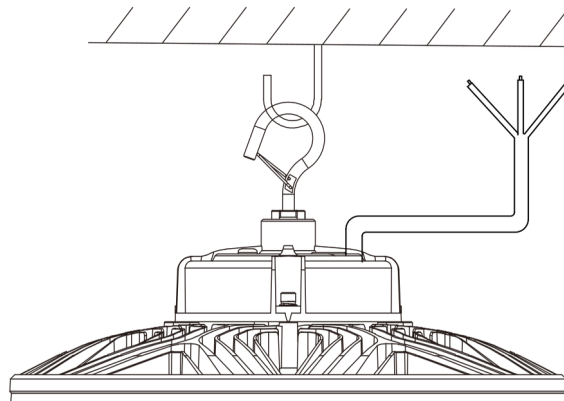

4. Hang the safety wire one side to the lamp, another side to the sturdy hook shown by diagram.


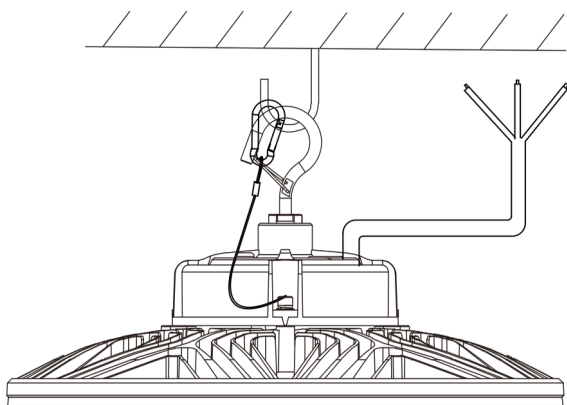


5. Connect wires as below diagram and turn on power to lighting.


Black wire : L

Green wire: 


White wire : N

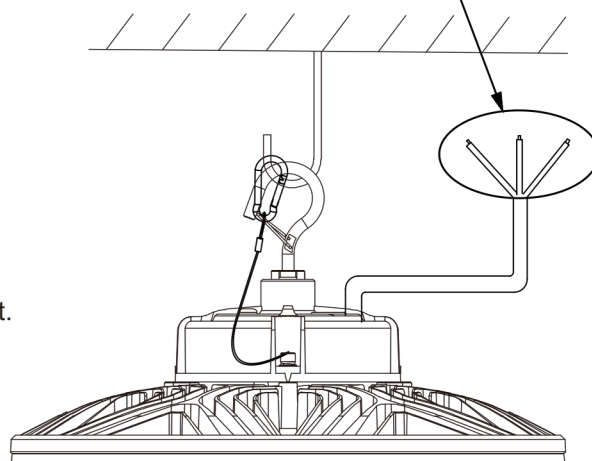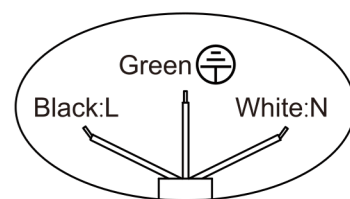

6. Use remote control to adjust product brightness, 0-100% adjustment.
Or use microwave induction to intelligently adjust product functions.

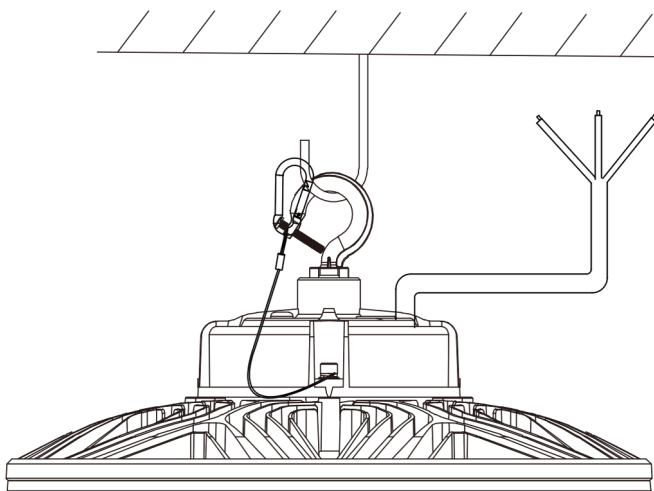

PACKAGE

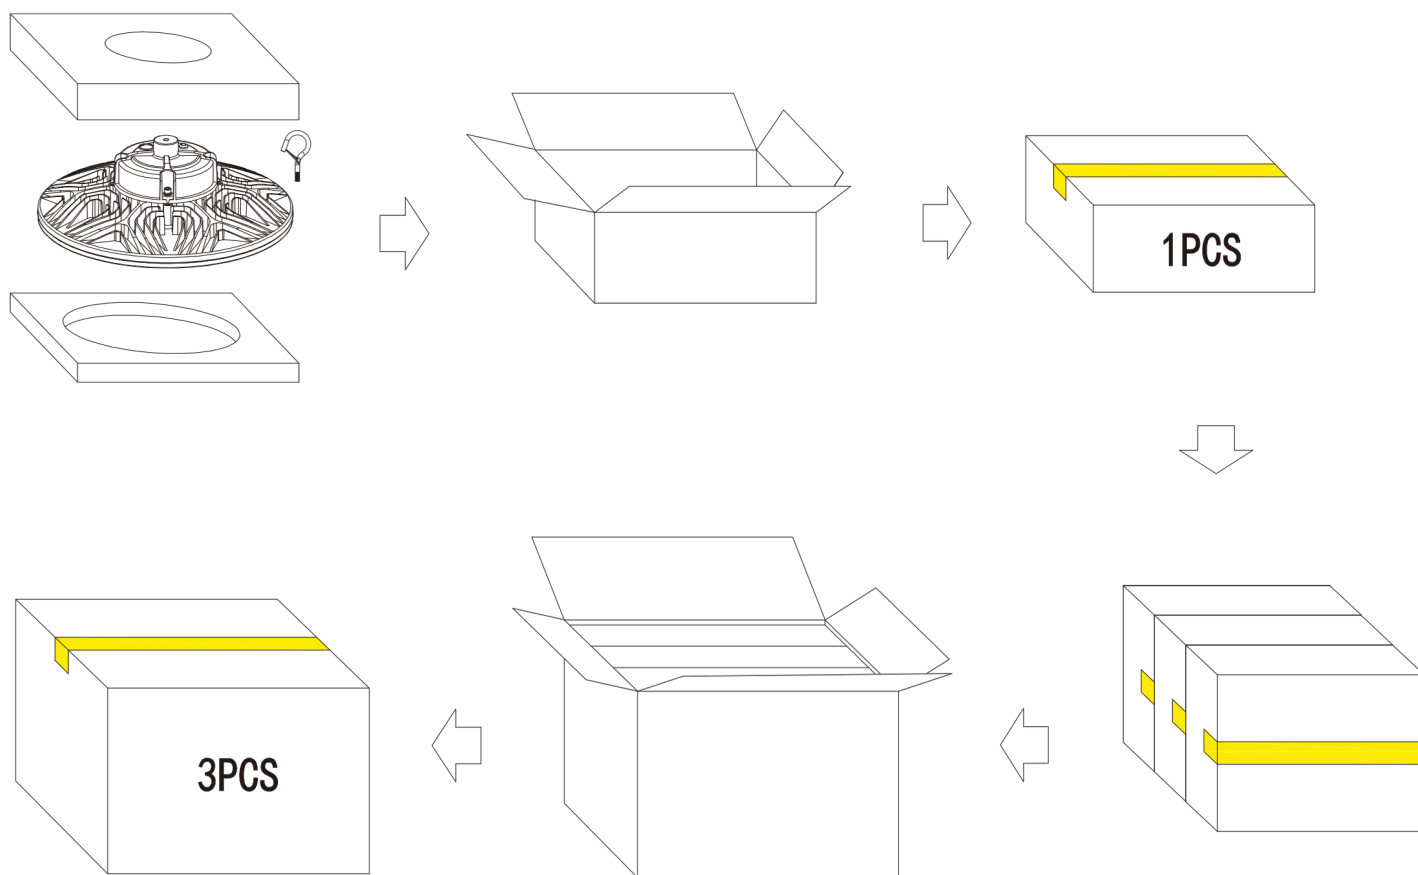

Power	Unit	Size	Grass weight	Volume
120W	1PC	330x330x150mm/ 12.99"*12.99"*5.91"/ 1.08ft*1.08ft*0.49ft	3.5 Kg / 7.72 lbs	0.108m ²
150W	3PCS	500x350x355mm/ 19.69"*13.78"*13.98"/ 1.64ft*1.15ft*1.16ft	14.5 Kg / 31.97 lbs	0.177m ²
200W	3PCS	500x350x355mm/ 19.69"*13.78"*13.98"/ 1.64ft*1.15ft*1.16ft	14.5 Kg / 31.97 lbs	0.177m ²
240W	1PC	390x390x150mm/ 15.35"*15.35"*5.31"/ 1.28ft*1.28ft*0.49ft	4.3 Kg / 9.48 lbs	0.15m ²
300W	3PCS	490x410x415mm/ 19.29"*16.14"*16.34"/ 1.61ft*1.35ft*1.36ft	17.5 Kg / 38.58 lbs	0.203m ²