

HBD UFO HIGHBAY LIGHT

NSF Certified Food Safety Light

Introduction

- ◆ HBD series high bay light with smooth housing prevents the accumulation of substances such as food debris and dust, which is the premier choice for harsh ambient lighting.
- ◆ As an NSF certified product, the luminaire is IP66 and IP69K rated, withstand the rigors of food processing and high pressure washing. Its standard efficiency is 150 lumen per watt. But it can reach up to 190 lumen per watt, and its highest lumen reaches 38,000 lumens.
- ◆ It supports built-in sensors and emergency functions for selection.
- ◆ The HBD Series can be used in food processing and food safe environments. Applications include poultry processing, food and beverage processing, commercial kitchens and manufacturing facilities, among others.



Product Specifications



Construction

- ◆ The streamlined housing design allows easy cleaning and prevents the build-up of any liquid or particles.
- ◆ Integral heat sink to optimize thermal transfer and maximize performance of the LEDs.

Electrical:

- ◆ 0-10v dimmable driver, which can dim from 100% down to off.
- ◆ The Input voltage is AC100-277V/AC100-347V/AC 277-480V (50/60Hz).
- ◆ 5ft (59") long power and 1ft (12") long dimming cord provided for easier installation.

Optics:

- ◆ LED chips support 3000k, 4000K, 5000K and 5700K with Ra80 for general light efficacy, Ra70 for high light efficacy
- ◆ Sealed optic available in wide beam angle.

Finish:

- ◆ White is the standard for NSF certification.

Mounting:

- ◆ Support Standard 3/4" G hook and Safety hanging for hanging installation.

Ambient Temperature:

- ◆ -40° F (-40° C) to 113° F (45° C)

Ordering Guide

EXAMPLE: XSY-HBDUXXW-XXKAA-MZPT

Brand X	Product name HBD	Region U	Wattage XXW	CCT XXX	Input Voltage AA	Mounting M	Sensor S	Driver P	Efficacy T
XSY	HBD	E=Europe U=America Blank=Australia	80W 100W 150W 200W	30K=3000K 40K=4000K 50K=5000K 57K=5700K	SV=100-277Vac LV=100-347Vac HV=277-480Vac	D= Ring Pendant G=Pole Mounted	S=with Sensor N=without Sensor	I=Isolated C=Non-Isolated	A=190lm/w B=150lm/w


Performance Data

Lumen values are based on 120VAC input product configuration, contact for performance data on any configurations not shown here.

General Efficacy

Nominal CCT	Lumens	Watts	LPW	CRI
3000K	14,000	100W	140	>80
4000K	14,200		142	
5000K	14,600		146	
5700K	15,000		150	
3000K	21,000	150W	140	>80
4000K	21,300		142	
5000K	21,900		146	
5700K	22,500		150	
3000K	28,000	200W	140	>80
4000K	28,400		142	
5000K	29,200		146	
5700K	30,000		150	

Photometric



Wide Beam angle

Brief Introduction

Housing

IP66 & IP69K;
Corrosion resistant;
No harmful substances or chemicals;

LED driver

0-10V Dim;
AC100-277V/AC100-347V/
AC277-480V



Efficacy
150LM/W
190LM/W

Glass or PC Lens
(Both of them meet NSF certificate)

Sensor


Microwave sensor
(Installed in the middle of Lens)
Maximum sensing height through PC lens: 10M/33FT

Note: PC lens is recommended for NSF standard applications.


Accessories

Sensor

Factory-Installable ONLY


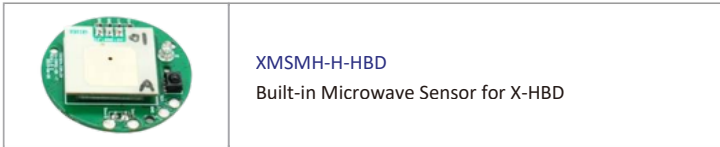


Field-Installable / Field-Use ONLY (purchased separately)

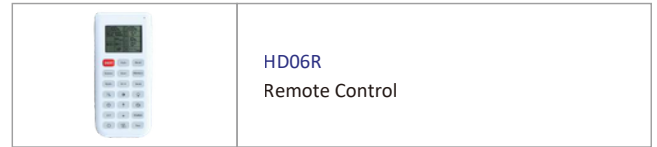


Emergency Battery Backup

Factory-Installable OR Field-Installable (field-installable purchased separately)

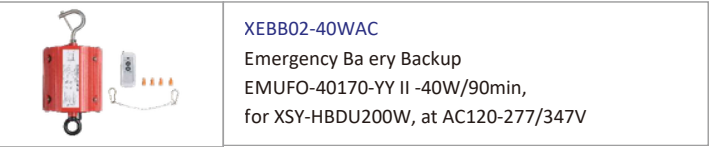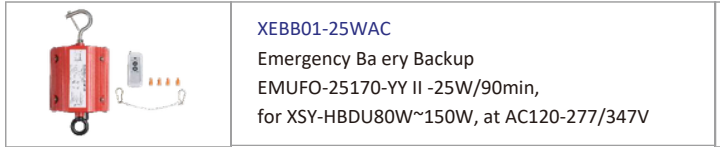

Reflector



Field-Installable (field-installable purchased separately)

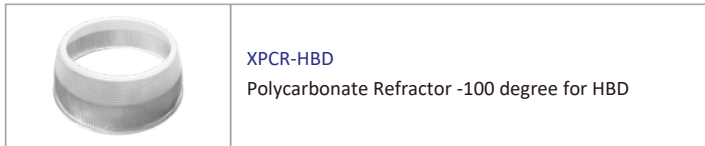

Electrical Data

Wa age(W)	Current (A)					
	Input Voltage (V)					
	120	208	240	277	347	480
100	0.93	0.53	0.46	0.40	0.32	0.23
150	1.39	0.80	0.69	0.60	0.48	0.35
200	1.85	1.07	0.93	0.80	0.64	0.46

Dimensions

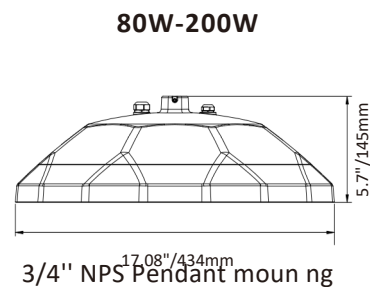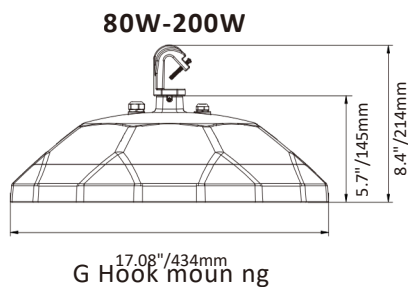

Shipping Information

Carton Size (in)	G.W. (lbs)	Per carton (pcs)	20GP (pcs)	40HQ (pcs)
18.70 x 18.70 x 7.48	13.71	1	548	1,507
18.70 x 18.70 x 7.48	13.71	1	548	1,507
18.70 x 18.70 x 7.48	17.26	1	548	1,507

Note: The packaging data can sometimes be outdated or incomplete. For the most reliable information, please reach out to us directly.