LED VAPOR TIGHT LIGHT



FEATURES AND SPECIFICATIONS

Construction

- WholePCmaterial body, excellent stress and UV resistance. Waterproof, dust-proof and anti-corrosion 4FT and 8FT Options

Electrical

- Input Voltage: 120-277vac
- IP 65 waterproof grade
- Wattage and CCT tun-able
- High lumen efficient 125lm/w on average
- Motion sensor, emergency function for option

Applications

- Offices,retail,supermarket，schools subway& train station, warehouse healthcare,residential,and hospitality applications

Installation

- Hangingandceiling installation

Listing

- Complywith the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2No.250.0) and are identified with the cETL

Warranty

- 5-yearlimited warranty


Specs at a Glance	* Nominal Wattage (Switchable)	
CCT (K)	5CCT Selectable: 3500K-4000K-5000K-5700K-6500K	
Wattage (W)	25W/30W/35W/40W/ 50W	40W/50W/60W/70W/80W
Efficacy (LPW)	125lm/w	
Size	4FT	8FT
CRI	>80	
Input Voltage	120-277V AC	
Operating Temp	-20°C-45°C	
Certifications	ETL DLC 5.1 Premium	ETL
Warranty	5-year limited warranty	

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


LED VAPOR TIGHT LIGHT

Ordering information

	Size	Wattage xxxW	CCT"XX"	Blank"xx"	Input Voltage
	4F 4FT 8F 8FT	50 25W-30W-35W - 40W-50W 80 40W-50W-60W - 70W-80W	3500-4000-5000 - 5700-6500K S CCT and Wattage Selectable	Blank Motion Sensor& Energency Backup M Motion Sensor EM EMergency Backup N Non-montion&emergency	120-277Vac

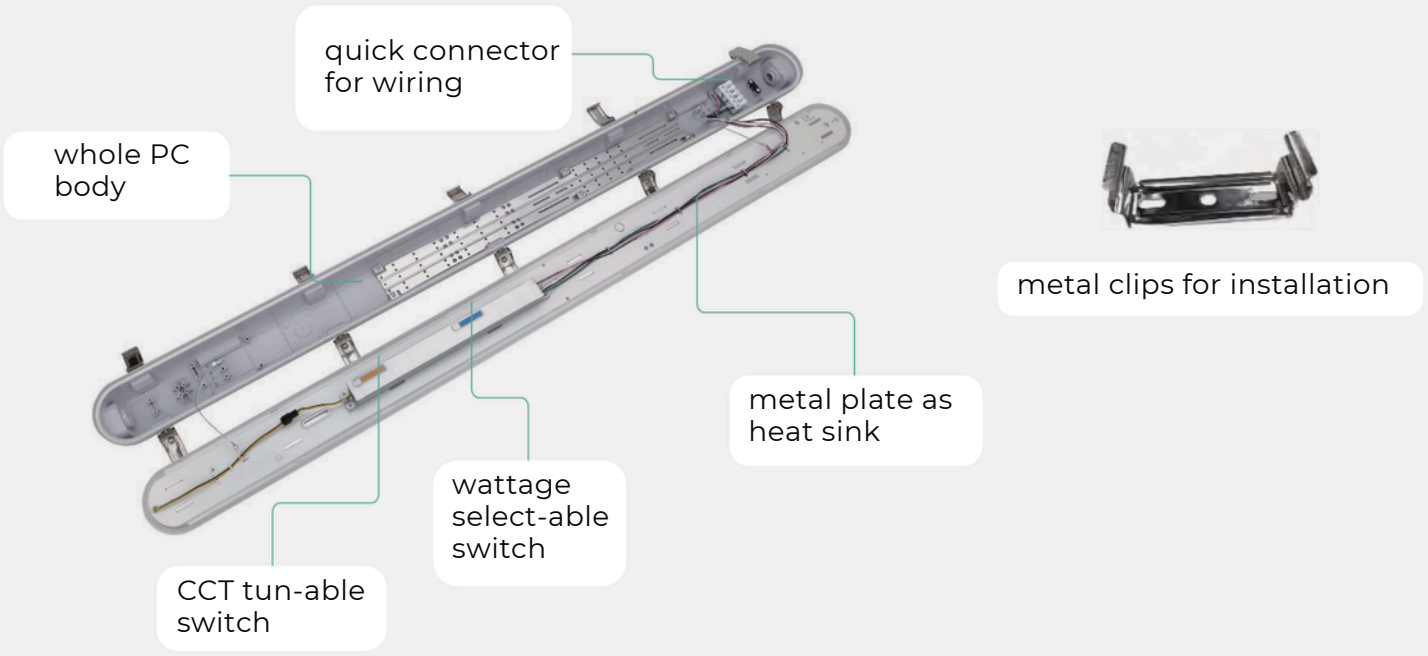

Multiple Sensor Solutions

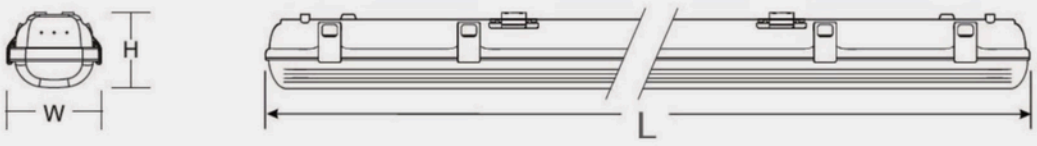

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

LED VAPOR TIGHT LIGHT

Length	Width	Height
1200mm/47”	95mm/3.74”	80mm/3.15”
2400mm/94”	95mm/3.74”	84mm/3.15”

ACCESSORIES



Metal clips

- Stainless steel material
- 2pcs for 4FT light,4pcs for 8FT light



Connection termina

- waterproof IP65
- Lead the connection wires inside the lamp



Metal hook

- Stainless steel material
- For hanging light
- 2pcs for 4FT light,4pcs for 8FT light



Screws bag


- All the screws will be used for installation are packed in this bag


INSTALLATIONS

※Slide the switches on the driver to select the desired CCT and wattage before installation.

Dimming Wiring Diagrams

Thisvaportightlightiscompatible with 0-10V output dimming controls.

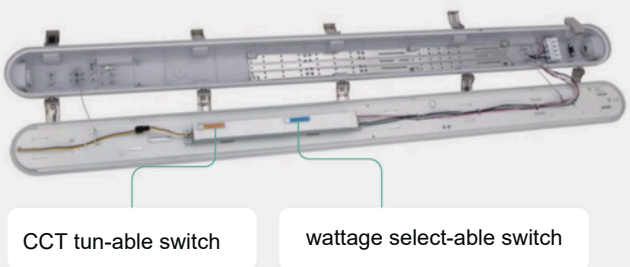


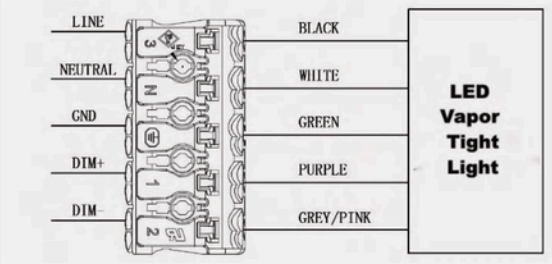


LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555
E-MAIL: helpdesk@lumensdepot.com
HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


LED VAPOR TIGHT LIGHT

Surface Mounting

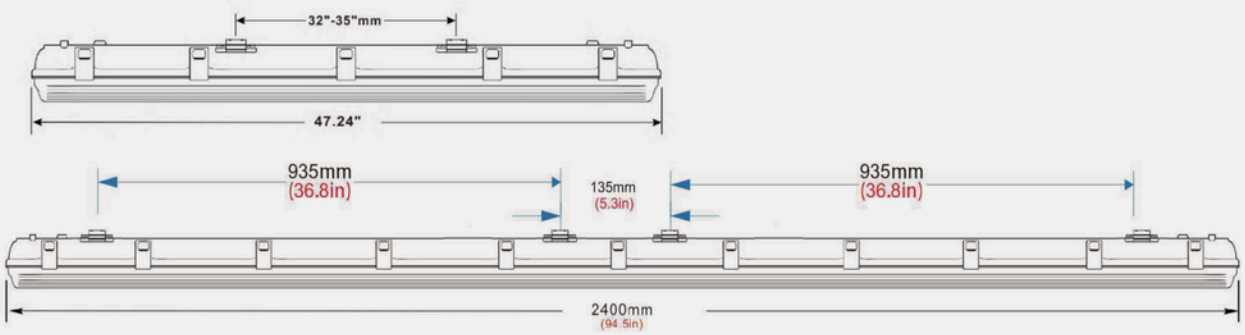

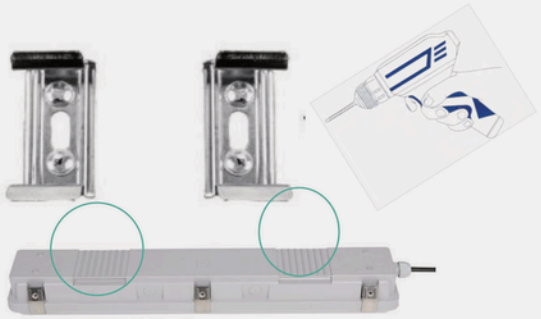


2.Drill the holes and screw the bracket on the wall.Stuck the vapor tight light to the bracket.

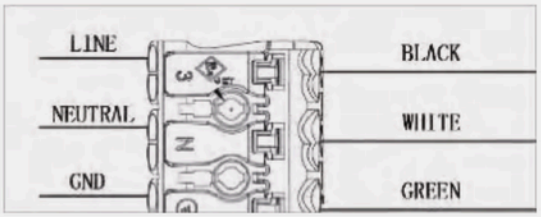

4.Connect the light to the electric supply,make sure the L/N/GND connect correct

Packing Info

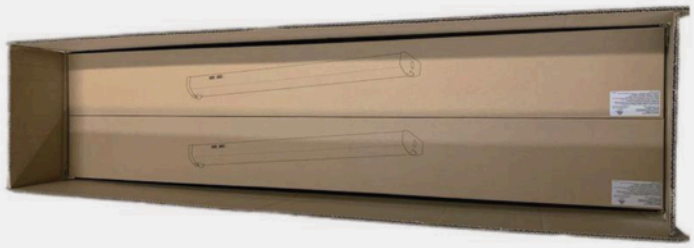

6pcs in an outer box

SIZE	Carton size(inch)	N.W(LBS)	G.W(LBS)	QTY/CTN	20'GP(PCS)	40GP(PCS)
4FT	47.83"*12.6"*7.87"	11.2	14	6pcs	2166	440
8FT	94.88"*12.64"*8.46"	23.4	28.59	6pcs	1014	4
						2058

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA