

2"/3"/4" GimbalCan-less Recessed Downlight with 5CCT Selector

Order Number:

Prepare by:

Note:

Date:

Type:

GIMBAL CAN-LESS

The Canless Gimbal downlight is integrated all-in-one recessed lights are the homeowners dream; perfect for value added lighting upgrades to enhance the look of your interior with the highest quality LEDs. With a low profile junction box and push and click quick connects, these lights are very easy to use. The fixture sits flush in the ceiling without a decorative trim allowing you to create trendy pockets of light while the swivel gimbal lets you highlight certain areas of your room such as artwork, sculptures and more. These recessed down lights are also designed for use in new construction, remodel and retrofit installation without needing a housing or j-box.


Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.



Select color temperature from

- 2700K WARM WHITE
- 3000K SOFT WHITE
- 3500K NATURAL WHITE
- 4000K COOL WHITE
- 5000K DAYLIGHT

DIMENSION

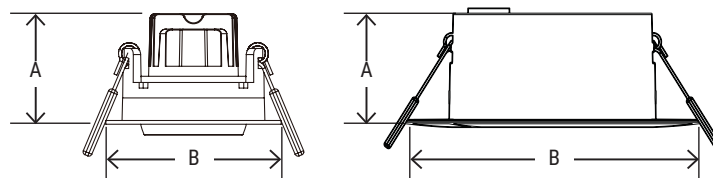

MODEL#	26W-5CCT	36W-5CCT	49W-5CCT
A	1.8"	1.89"	1.89"
B	2.19"	3.75"	5"

Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

TECHNICAL SUMMARY

	LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
	360	6W	60 lm/W	90	120V, 60 Hz	60°	2700K/ 3000K/ 3500K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F
	370	6W	62 lm/W							
	540	9W	62 lm/W							

PART NUMBER ORDERING SUMMARY

M	G	D	02	9W	-	5CCT
M	G	D	2"/3"/4"	6W/9W		5CCT
	Gimbal	Downlight	Aper ture	Wattage		27K/30K/35K/40K/50K

2"/3"/4" GimbalCan-less Recessed Downlight with 5CCT Selector

Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, and foam gasket with deep baffle white ring. Tilt up to 20°.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Can-less design, no can housing needed for the installation
- Pre-installed surface mounting bracket adapter
- Junction box included
- Ceiling mount, directly mount on drywall

LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.



RECOMMENDED DIMMERS

LUTRON

- TGCL-153PH-WH
- DVCL-153PR
- P-PKG1W-WH-R
- CTCL-153PDH-WH

LEVITON

- R00-RNL06-TW
- R50-IPL06-10M

COMPATIBLE PRODUCTS (SOLD SEPARATELY)



Mounting plate for 3"/4"/6" can-less downlight



Mounting plate for 4"/6"/8" can-less downlight



3ft/ 10ft Extension cord for can-less downlight