
LED FAN CORN LIGHT

Features

* Adjustable wattages: 60%/ 80%/ 100%
* Adjustable CCT: 4500K/ 5000K/ 5700K
* 40% more LEDs compared to general corn bulbs available in the market
* Suitable for replacing 100~600W metal halide/HPS
* Transparent PBT Cover, Aluminum fin heat sink
* Equipped with 2 fans for active cooling
* Available in 30~150W power range
* Supports 100~277V voltage input
* Provides a 360-degree beam angle
* 6K High voltage surge test passed
* Offers a lifespan of 50,000 hours
* E26/ E27/ E39/ E40 Mogul screw base
* SMD2835, 150lm/w LED chips
* Emits no UV or IR radiation
* No magnetic disturbance driver
* 5 years warranty

CCT Adjustable



4500K
5000K
5700K

Power Adjustable



30W	45W	60W	75W	80W	100W	120W	150W
18W	27W	36W	45W	48W	60W	72W	90W
24W	36W	48W	60W	64W	80W	96W	120W
30W	45W	60W	75W	80W	100W	120W	150W



30W/ 45W | 60W/ 75W | 80W/ 100W | 120W/ 150W

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555
E-MAIL: helpdesk@lumensdepot.com
HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


DIMENSIONS

Lumens	Base	Electrical Data	LED Type	Color Temperature	Color Rendering Index
4500 Lm	E26 E27 E39 E40	Input Voltage 100-277VAC 50/60Hz Power Factor(%)>90	280 PCS SMD 2835 Chips	3000K 4500K 5000K 5700K	Ra≥80
6750 Lm					
9000 Lm			504 PCS SMD 2835 Chips		
11250 Lm					
12000 Lm	E39 E40				
15000 Lm					
18000 Lm			728 PCS SMD 2835 Chips		
22500 Lm					

DIMENSIONS


30W/ 45W

Weight: 450g/ 0.99 lbs

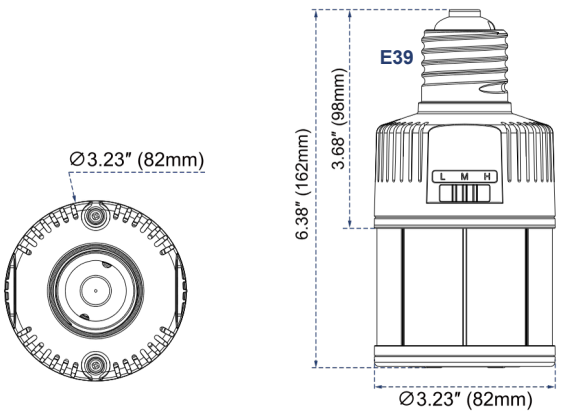


60W/ 75W

Weight: 570g/ 1.25 lbs

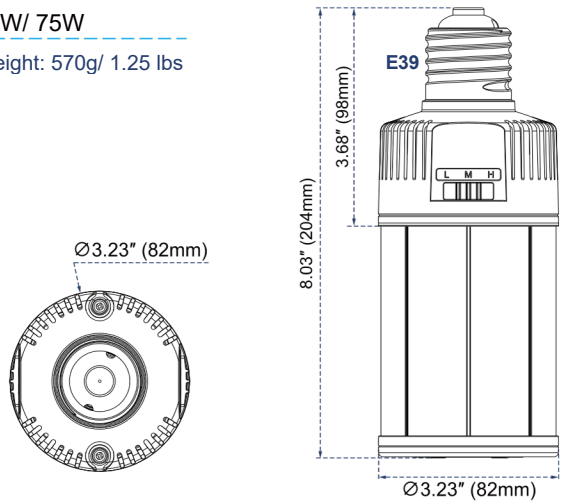


80W/ 100W

Weight: 560g/ 1.23 lbs

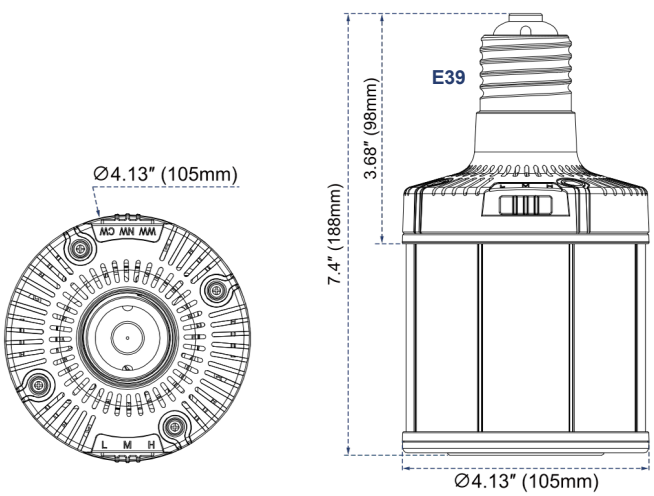


120W/ 150W

Weight: 850g/ 1.87 lbs

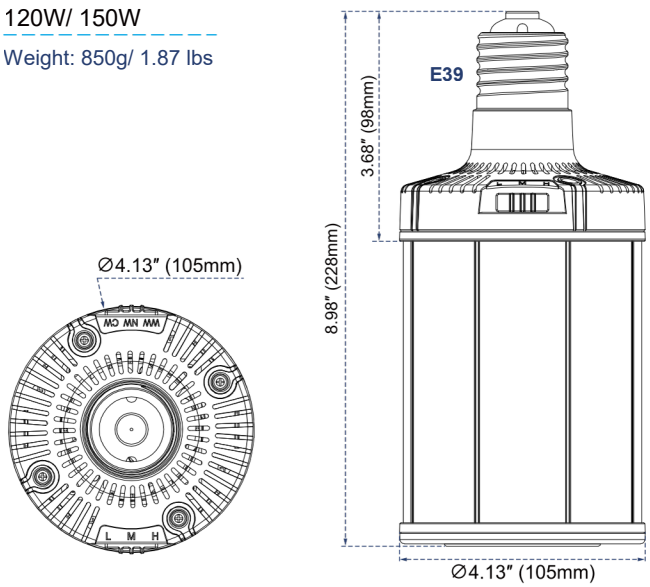

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555
E-MAIL: helpdesk@lumensdepot.com
HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

STRUCTURE

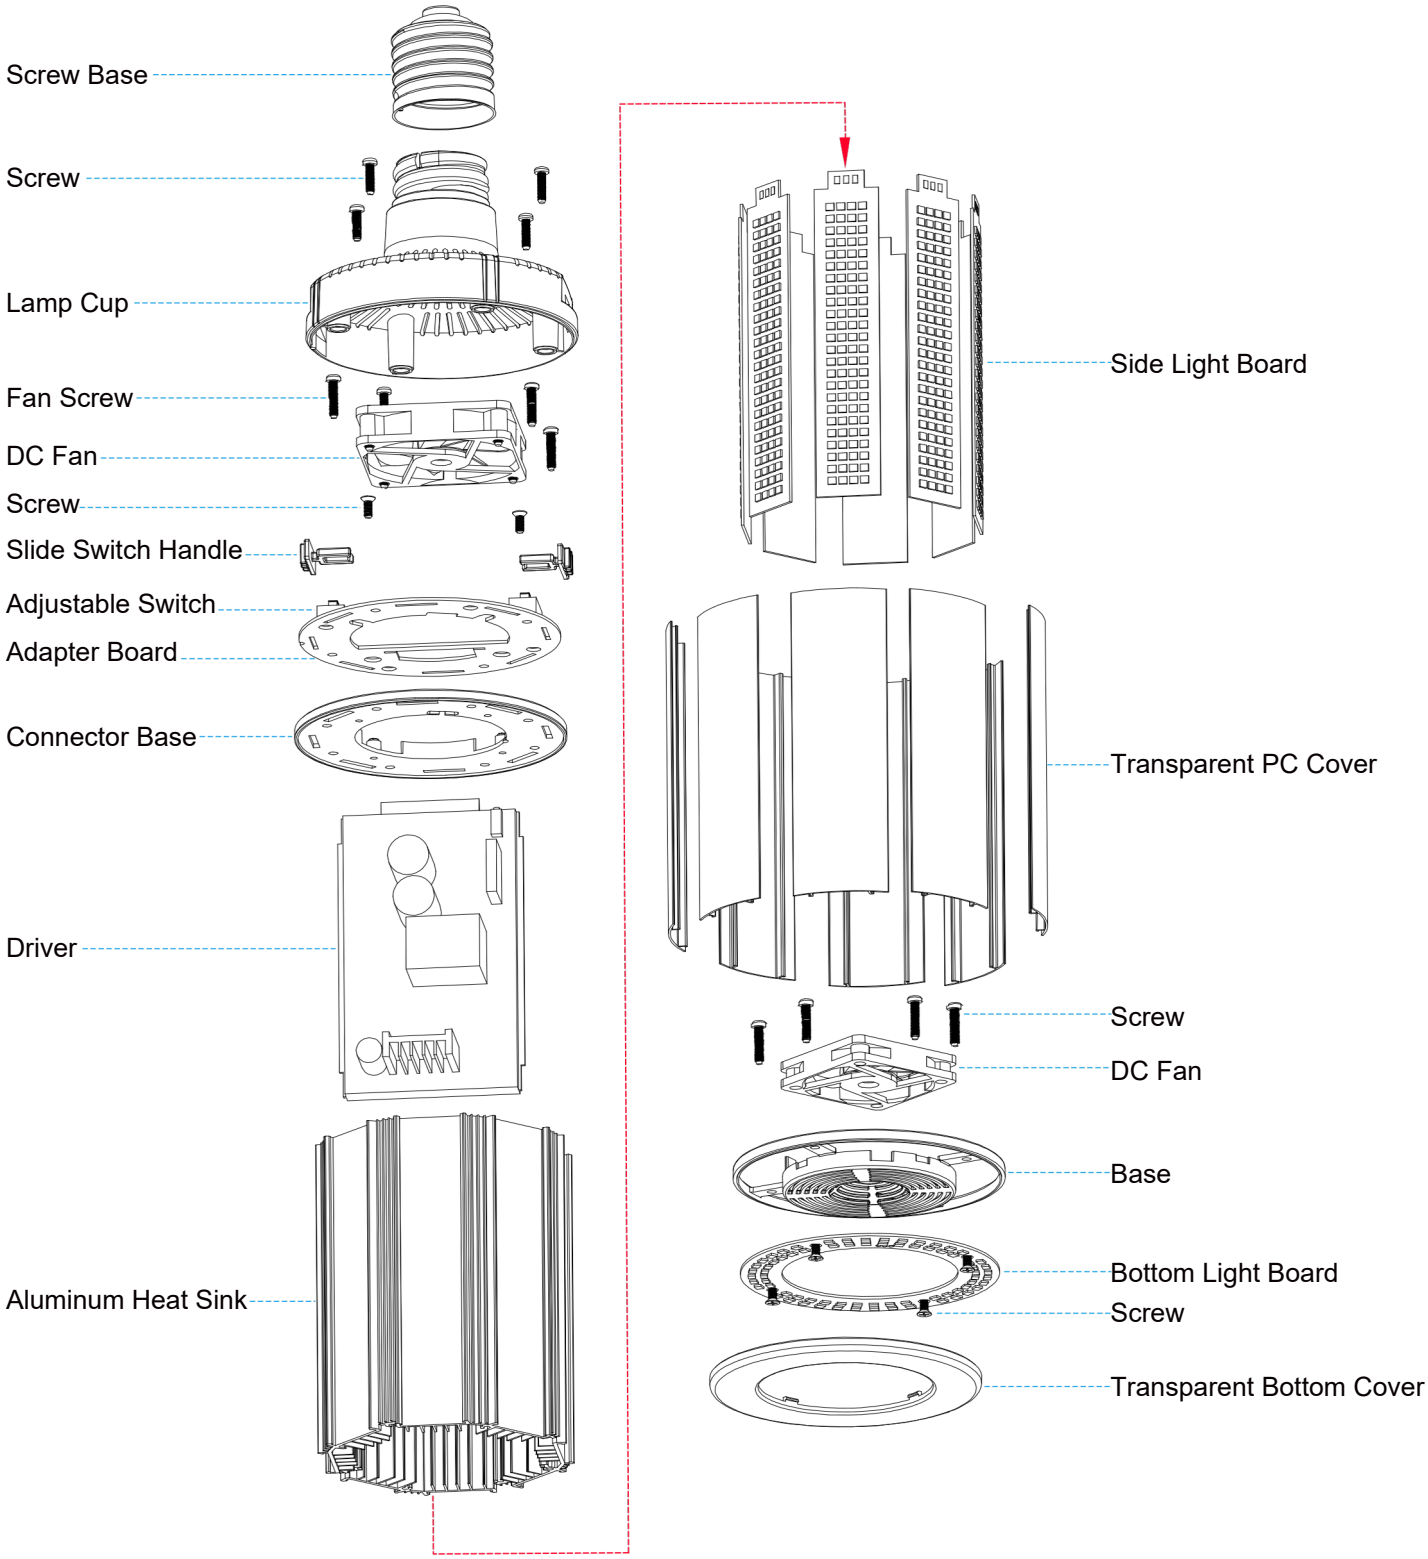


LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555
E-MAIL: helpdesk@lumensdepot.com
HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

INSTALLATION INSTRUCTIONS


1.Remove old ballast or disconnect from existing lamp holder.
Remove and dispose of ballast in correct manner.
Shown as Figure 1.(North America 100-277 VAC)

Fig1

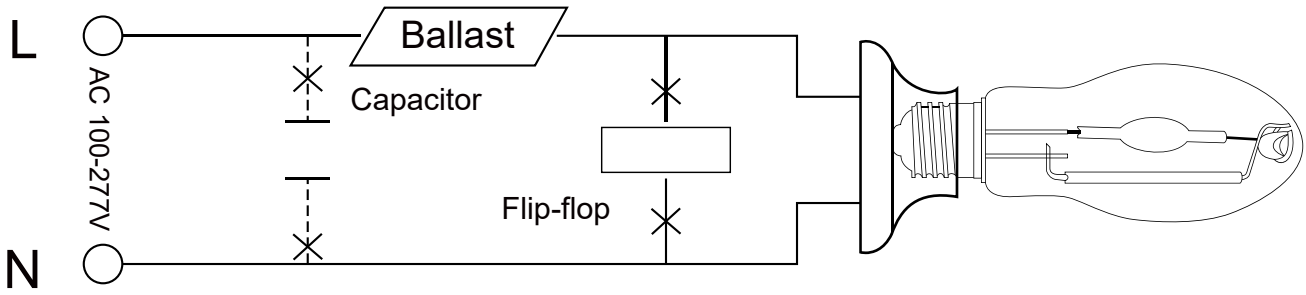


2.Reconnect directly to the existing lamp holder. Shown as Figure 2.
(North America 100-277VAC)

Fig2

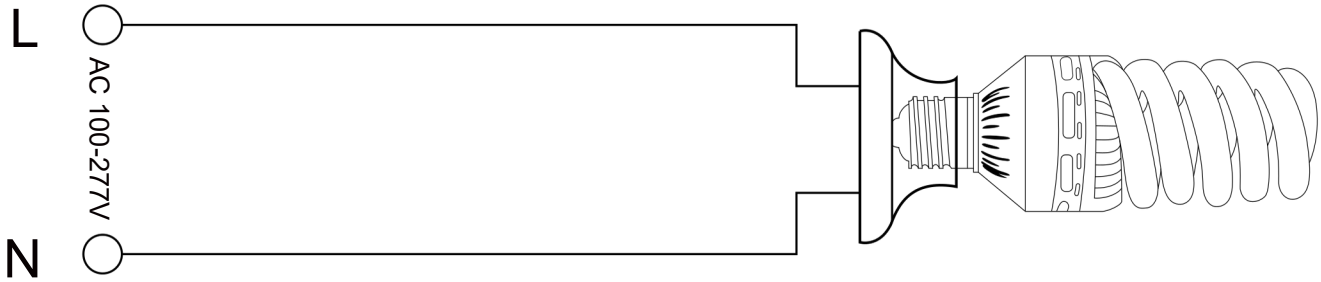

3.Install New LED Replacement lamp. Shown as Figure 3. Please make sure the old fitting is correctly earth. (North America 100-277VAC)

Fig3

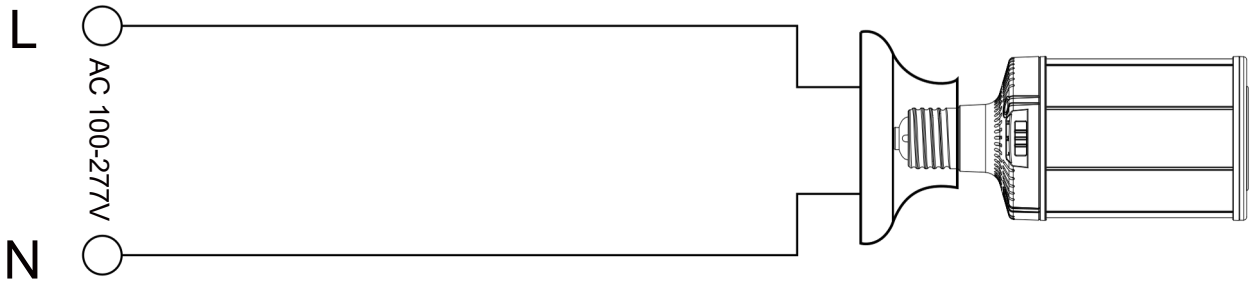

APPLICATION













LED corn light can be wildly used in warehouse, workshop, parking lot, street lighting, with high bay, shoebox, canopy fixtures.



Parking Lot



Yard




Street



Stadium

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA

PACKAGE

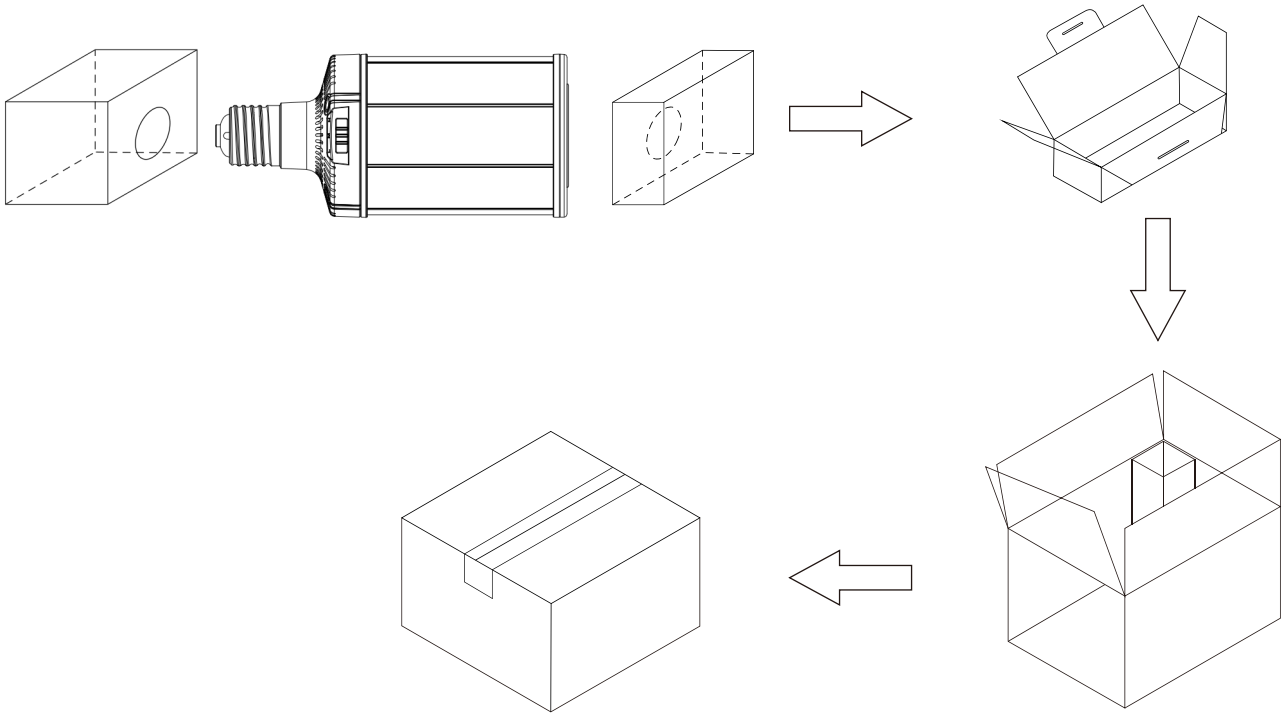

Unit	Package Size	Gross Weight	Volume
1 PC	111x111x200mm/ 4.37″*4.37″*7.87″	0.52 kg/ 1.15 lbs	0.002m³
30 PCS	580x360x420mm/ 22.83″*14.17″*16.54″	16.6 kg/ 36.60 lbs	0.088m³
1 PC	111x111x240mm/ 4.37″*4.37″*9.45″	0.66 kg/ 1.45 lbs	0.003m³
24 PCS	475x360x500mm/ 18.70″*14.17″*19.69″	17.0 kg/ 37.48 lbs	0.086m³
1 PC	130x130x215mm/ 5.12″*5.12″*8.46″	0.70 kg/ 1.54 lbs	0.004m³
18 PCS	420x420x450mm/ 16.54″*16.54″*17.72″	14.0 kg/ 30.86 lbs	0.079m³
1 PC	130x130x255mm/ 5.12″*5.12″*10.04″	0.95 kg/ 2.09 lbs	0.004m³
12 PCS	420x300x530mm/ 16.54″*11.81″*20.87″	13.0 kg/ 28.66 lbs	0.067m³