Mini LED Flood Light

30W/50W/80W/100W








Specifications

Wattage	30W / 50W / 80W / 100W
LED Chip	SMD 2835,Samsung or other LED Brand
Driver Brand	SOSEN / ZHIHE or other Brand Power Supply
Efficacy	130lm/w-140lm/w
AC Input Voltage	120~277Vac / 120-347Vac
Light Distribution	60°/ 120° / 90°x140°for options
Ambient Temperature	-40℃ ~ 45℃(-40℉~113℉)
Additional Feature	CCT / Power Switch Optional
Total Harmonic Distortion	＜20%
Lifetime	50,000H
Mount	Knuckle Mount / Trunnion Mount / U-Bracket
Warranty	5 years

LUMENS DEPOT
PRO LIGHTING SOLUTION
TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA


Features



Photocell sensor





ADC12 Die casting




CCT Select


Installation Angle Adjustable

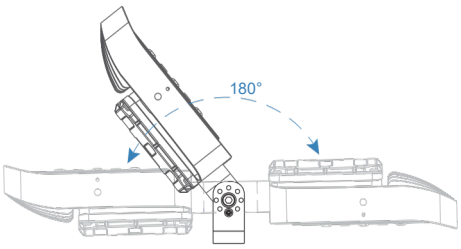


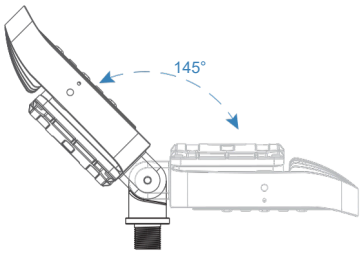





Multiple beam angle: 60° /120°






Hollow out heat sink design, better for heat dissipation

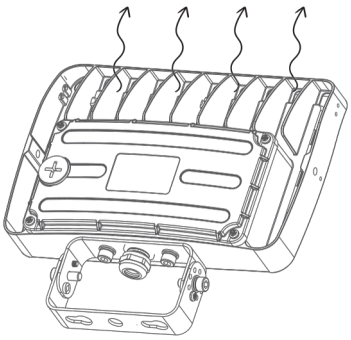


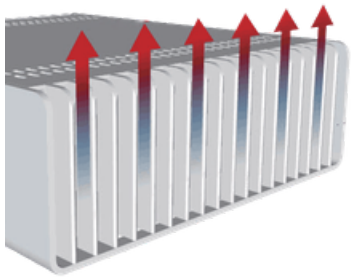


3 Different mount brackets



Knuckle mount




Trunnion Mount





U Bracket


Dimension


30W&50W

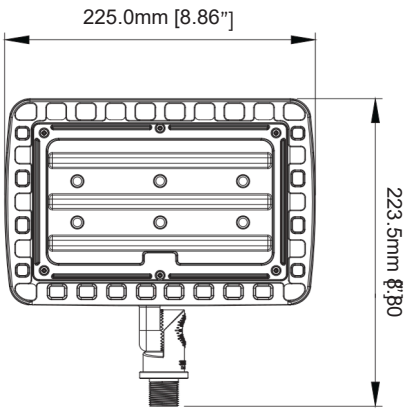


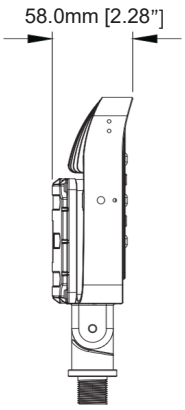

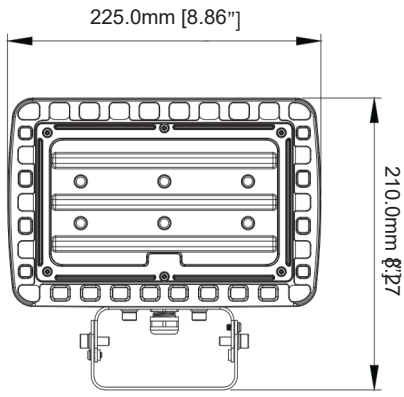


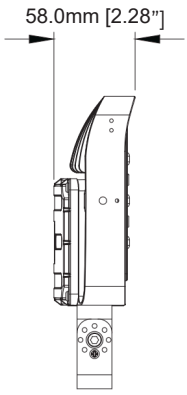


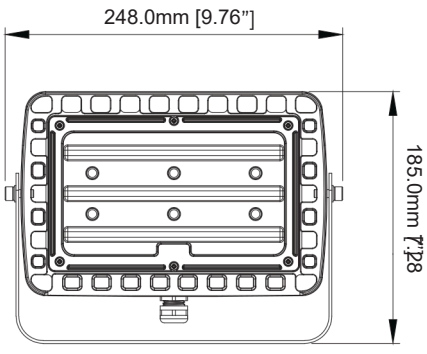


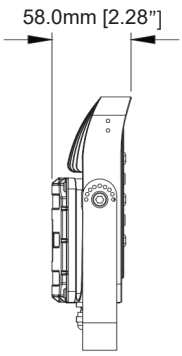

80W&100W

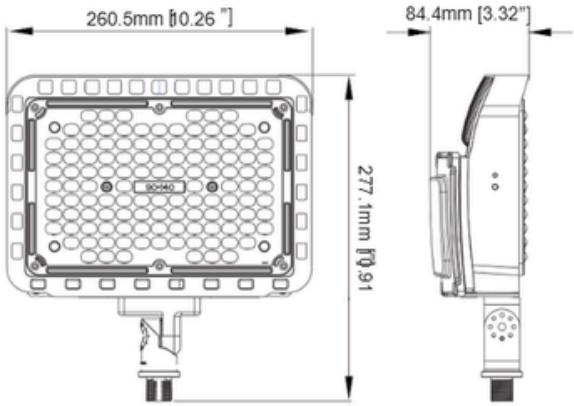

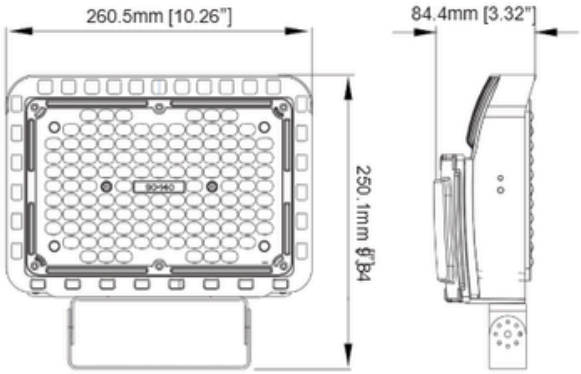

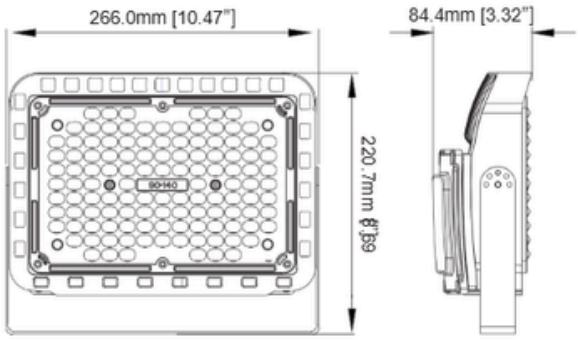


Applications



Building wall



Yard

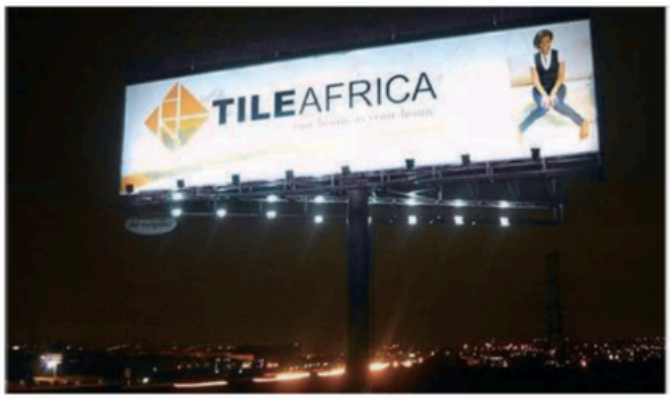


Billboard



Garden


Light Distribution

120°

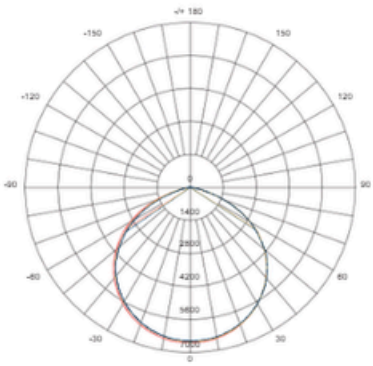


UNIT : cd
V 0.0DEG
PLAN,114.4deg H
0.0DEG PLAN,112.5deg
AVERAGE BEAM ANGLE(50%):113.5 DEG

60°

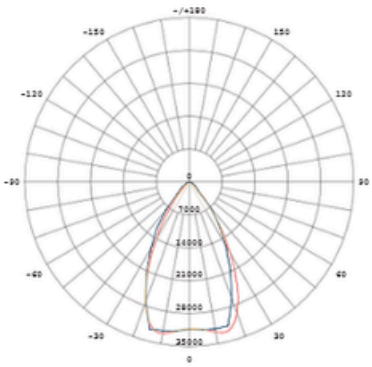

UNIT:cd
V 0.0DEG PLAN,58.8deg
H 0.0DEG PLAN,59.3deg
AVERAGE BEAM ANGLE(50%):59.1 DEG


90*140°

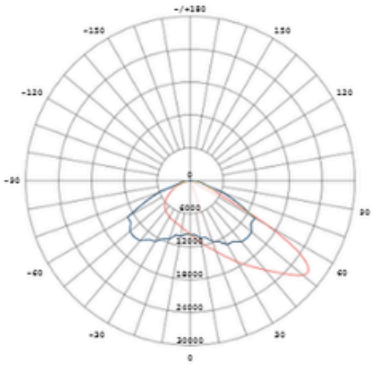


UNIT:cd
V 0.0DEG PLAN,41.5deg
H 0.0DEG PLAN,136.6deg
AVERAGE BEAM ANGLE(50%):89.1 DEG


Installation


1.Knuckle Mount

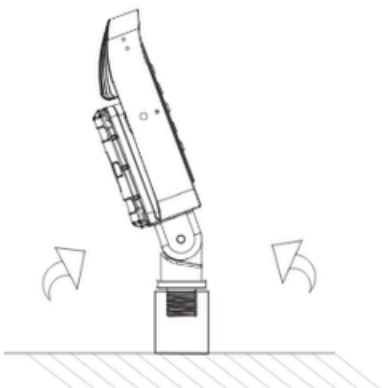

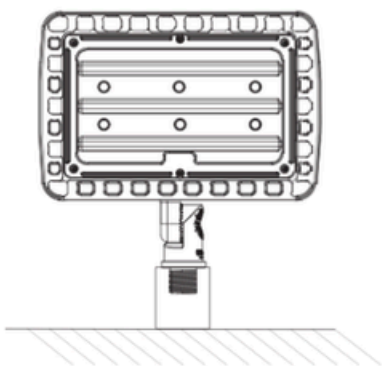



2.Trunnion Mount





3.U Bracket Mount

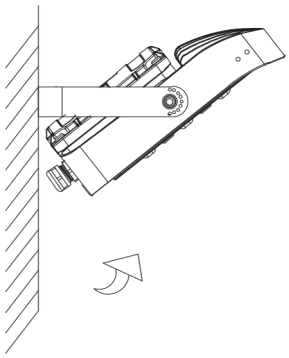


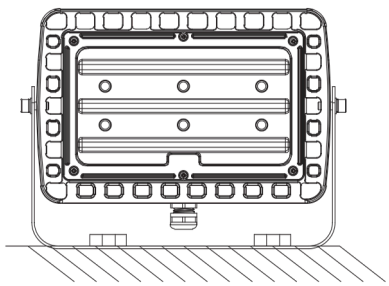


Packaging information

Wattage	Product Size(mm/in)	Inner Box Size(mm/in)	Carton Box Size(mm/in)	N.W (Kg/lb)	G.W (Kg/Lbs)	QTY
30W/50W	*225 x 210.0 x 58 mm 8.86 x 8.27 x 2.28 in*	*260 x 200 x 95 mm 10.24 x 7.87 x 3.74 in*	*535 x 420 x 305 mm 21.06 x 16.54 x 12.01 in*	*1.4Kg(3.09lb)*	*19.35kg(42.66lb)*	*12 PCS*
80W/100W	*260 x 278 x 85 mm 10.24 x 10.95 x 3.35 in*	*240 x 280 x 95 mm 9.45 x 10.03 x 3.75 in*	*520 x 610 x 340 mm 20.47 x 24.02 x 13.39 in*	*2.4Kg(5.30lb)*	*32.40kg(71.43lb)*	*12 PCS*


Lamp

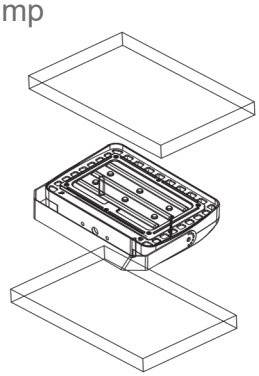

Protection

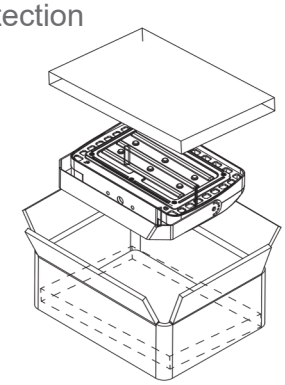

Package





LUMENS DEPOT
PRO LIGHTING SOLUTION

TEL: +18007658555 E-MAIL: helpdesk@lumensdepot.com HTTP://WWW.LUMENSDEPOT.COM
ADDRESS: 18 Lawrence Pkwy, Tenafly, New Jersey, 07670, USA