

3"/4"/6"/8"

RoundBaffleCan-lessUltra-Slim Recessed Downlight with 5CCT Selector


Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

The **RoundBaffle** Ultra-Slim LED Downlights are the perfect lighting solution for both residential and commercial. The ultra-slim can-less design allow you to install them in where a recessed can won't fit, no can housing is needed. The quick wiring connectors are coming with the junction box, making the wiring easier-simple place the cable to the connectors to complete the wiring, no wiring nuts and electrical tap needed for the installation. Our downlight provides perfect light performance, showing the true colors of objects and surroundings. You also get all other benefits of LED technology, including longer life to lower maintenance cost, less heat for better energy saving in summer.

Perfect use for residential housings, condominiums, the healthcare facility, shopping centers and hospitality industry.




BAFFLE CAN-LESS

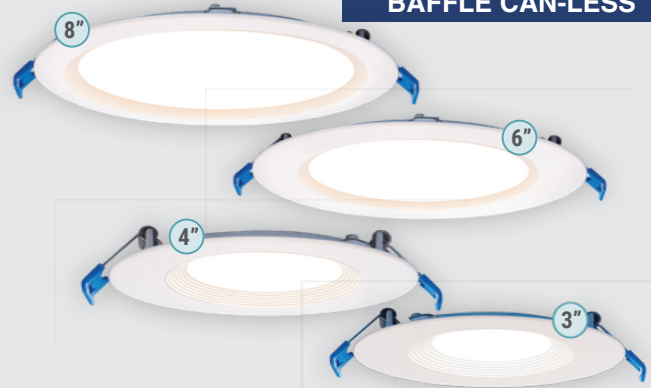

Select color temperature from

- 2700K **WARM WHITE**
- 3000K **SOFT WHITE**
- 3500K **NATURAL WHITE**
- 4000K **COOL WHITE**
- 5000K **DAYLIGHT**

DIMENSION

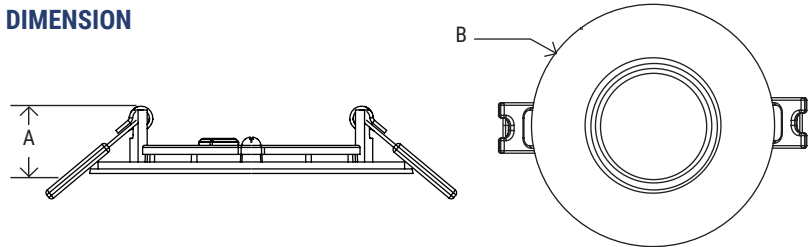

MODEL#	LD3	LD4	LD6	LD8
A	1.25"	1.25"	1.25"	1.25"
B	3.4"	4.7"	6.7"	8.6"

Energy Star® and ETL certified. It can be used to comply with Title-24 and JA8 high efficacy light source requirements.

TECHNICAL SUMMARY

LUMENS	WATTS	EFFICACY	CRI	VOLTAGE	BEAM °	CCT	PF	LIFE	OPERATING TEMP.
500	8W	62.5 lm/W	90	120V 60 Hz	95°	2700K/ 3000K/ 3500K/ 4000K/ 5000K	>0.9	50,000 hrs	-5°F ~ 104°F
650	10W	65 lm/W							
900	12W	75 lm/W							
1500	18W	83 lm/W							

PART NUMBER ORDERING SUMMARY

M	R	S	D	6	12W	BA	-	5CCT
M	Round	Slim	Downlight	3"/4"/6"/8" Aperture	8W/10W/12W/18W Wattage	BA Baffle		5CCT 27K/30K/35K/40K/50K

3"/4"/6"/8"

RoundBaffleCan-lessUltra-Slim Recessed Downlight with 5CCT Selector

Project Name:	Order Number:	Prepare by:	Note:	Date:	Type:

CONSTRUCTION

Unit includes spinning metal housing, LED array, heat sink, lens, and foam gasket with baffle white ring.

OPTICS

- High quality PC lens
- Efficiency LED array
- Diffuse for uniform illumination

DRIVER

- High efficiency integral 120V 60Hz constant current dimmable driver.
- Smooth flicker free deep dimming to 10%

MOUNTING

- Can-less design, no can housing needed for the installation
- Pre-installed torsion spring clips
- Junction box included
- Quick wiring, no wiring nuts and electrical tap needed for the installation

LISTING

ETL Listed, Energy Star Listed, Suitable for Wet Locations, Title 24 JA8-2022, RoHS, Air-Tite Certified

WARRANTY

5 years manufacturer warranty, consult factory for more details. Terms and conditions may apply.



COMPATIBLE PRODUCTS (SOLD SEPARATELY)



Mounting plate for 3"/4"/6" can-less downlight



Mounting plate for 4"/6"/8" can-less downlight



3ft/ 10ft Extension cord for can-less downlight