

Full Cut-Off Wall Pack

30W / 60W




Specifications

Wattage	30W / 60W
Power Factor	≥0.95
LED Chip (optional)	SMD 3030, Philips or other LED chip
Driver Brand	SOSEN/ ZHIHE /WEIPENG/ Other Brand
CCT	3000K / 4000K / 5000K / 6000K
Lumen	3900LM / 7800LM
AC Input Voltage	100-277V / 120-347V / 180-480V
Exclusive ~~Feature~~ (Feature)	Non Adjustable (Real Dark Sky)
Material	Aluminum alloy + PC optic lens
Housing color	Dark Bronze / Black / Gray / White
Ambient Temperature	-40°C ~ 45°C (-40°F ~ 113°F)
Total Harmonic Distortion	<20%
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years

Features



Motion sensor




Daylight sensor



ADC12 Die casting

Full Cut Off (Dark Sky)


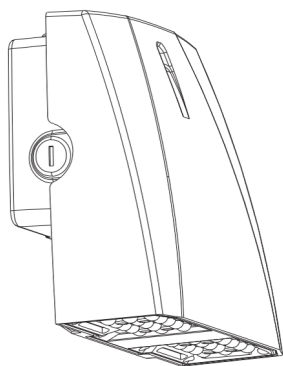


Sensor (Daylight sensor available)



Daylight Sensor

Fine heat sink design, fine heat dissipation

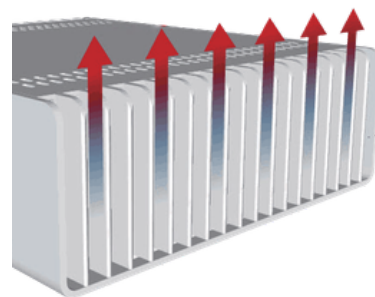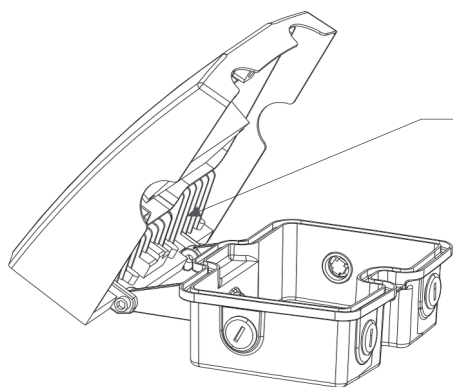


Applications



Facility Plant



Back Yard

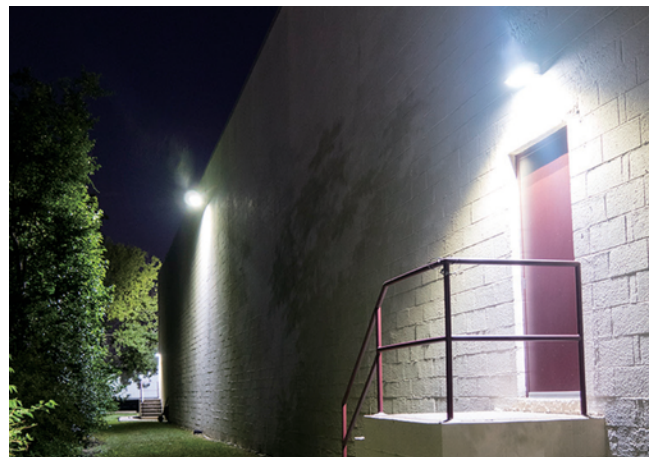

Emergency Exit




Building




Residential Area

Light Distribution

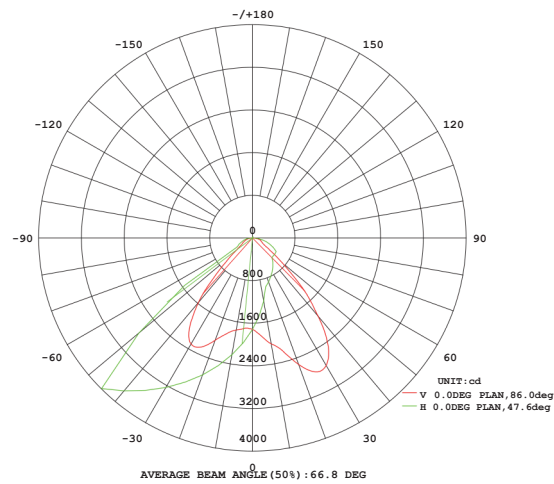


Dimension (Size)

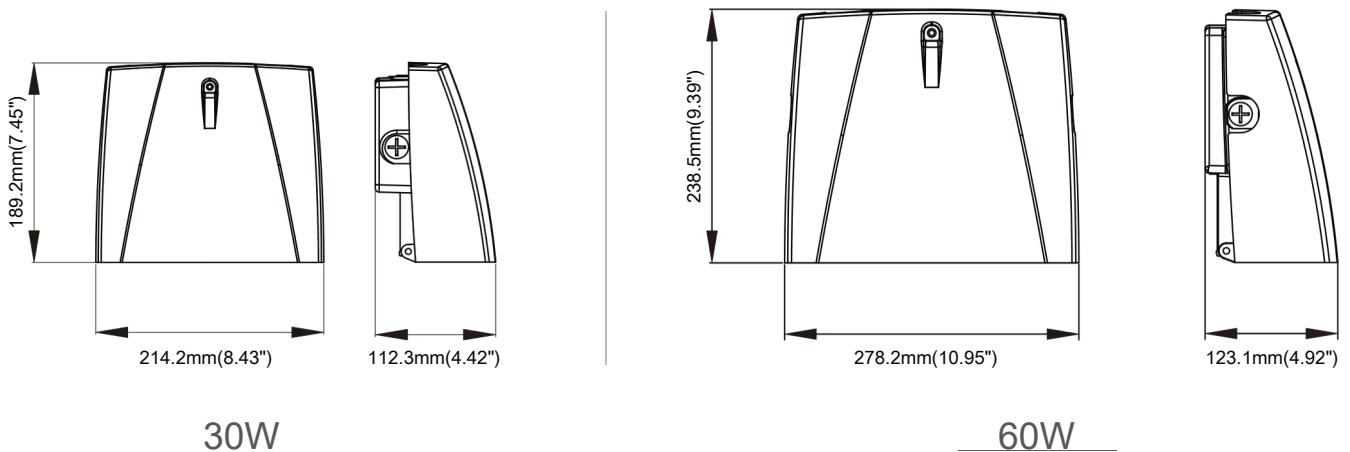


Installation


1. Remove M3x12mm locking screw with 3mm allen wrench on fixture to open the fixture

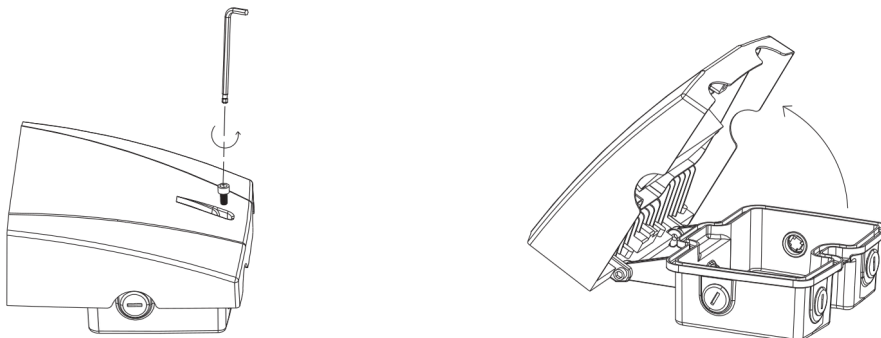


2. Remove the cover of EVA gasket, put the EVA gasket onto the back of the wall pack housing tightly.

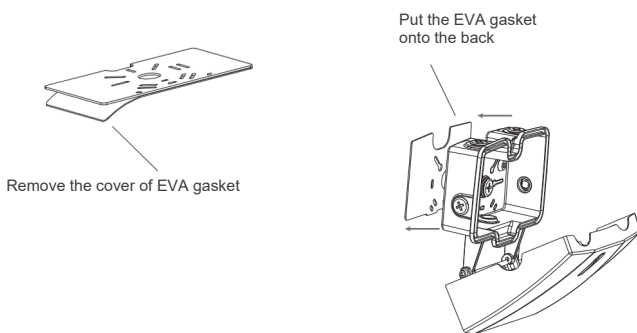

3. Remove Knockout Plug and attach conduit.

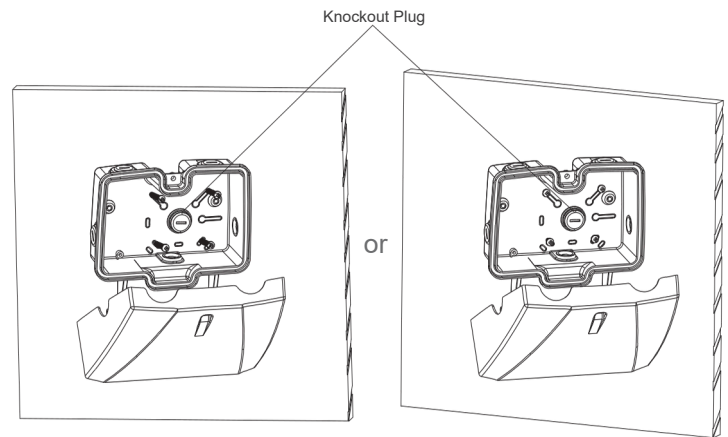


4. Drill 2 holes (0.125 inch) through fixture, and 2 holes into mounting surface using drill template. Drive wall anchors into holes. Attach the fixture to wall with using 2 screws (not included).

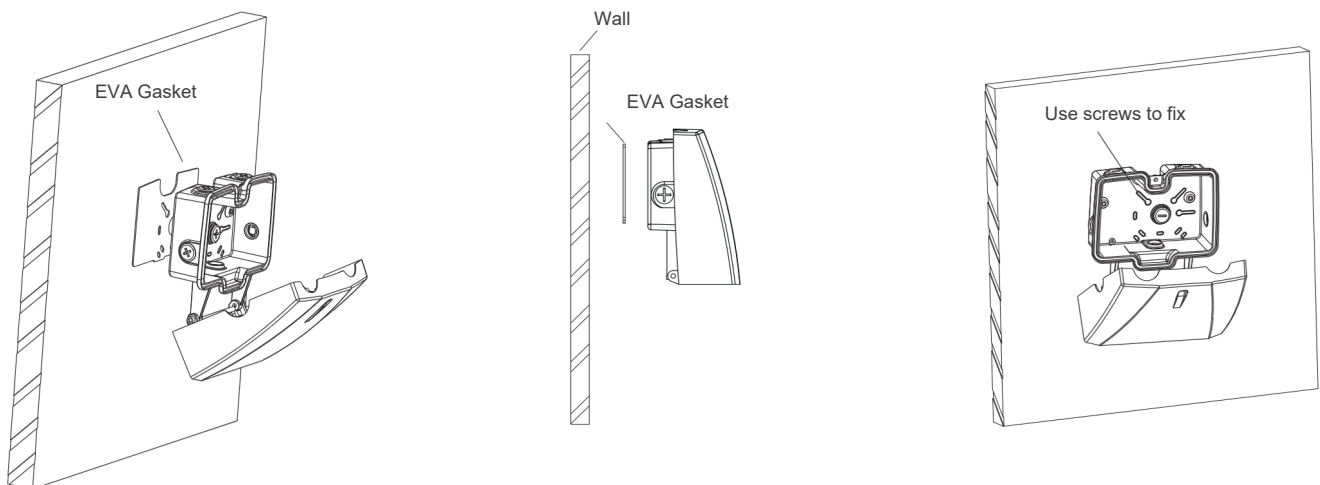

5. Pull wires from conduit through knockout and make wire connections to main supply. Black to Line, White to Neutral, and Green to Ground. Consult an electrician and install according to national, local, and state codes.


6. Close hatch and tighten M3x12mm locking screw with 3mm allen wrench.

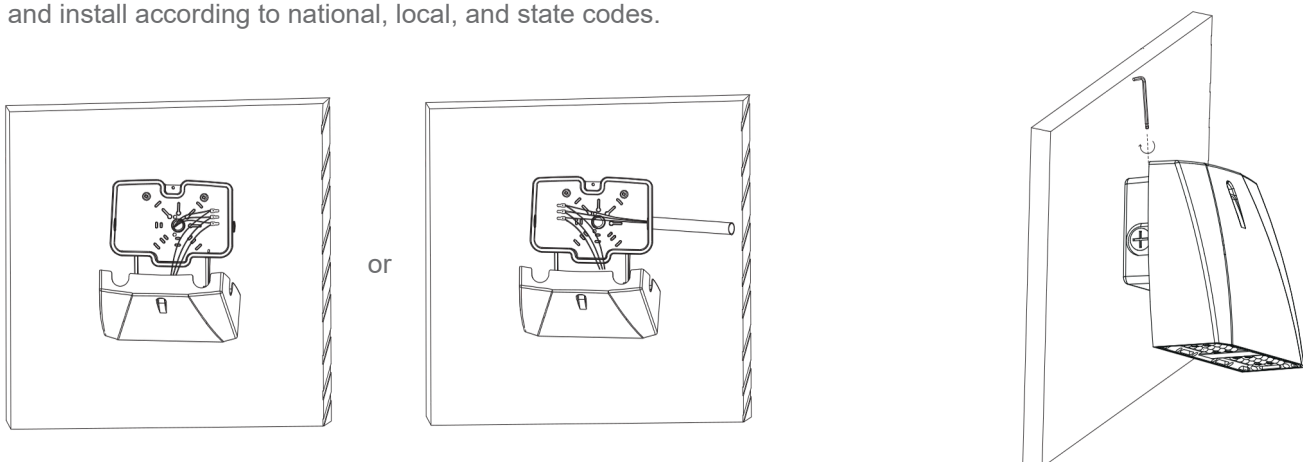


Packaging information

Wattage	Product Dimension (mm/in)	Carton Box Dimension	N.W (Kg/lb)	G.W (Kg/lb)	QTY / CTN
30W	215 × 90 × 113mm 8.46 × 7.48 × 4.45 in	240 × 230 × 150mm 9.45 × 9.06 × 5.91 in	1.7Kg(3.75lb)	2.1kg(4.63lb)	1 PCS
60W	279 × 239 × 125mm 10.98 × 9.41 × 4.92 in	330 × 310 × 200mm 12.99 × 12.20 × 7.87 in	3.2Kg(7.05lb)	3.9kg(8.60lb)	1 PCS

Protection

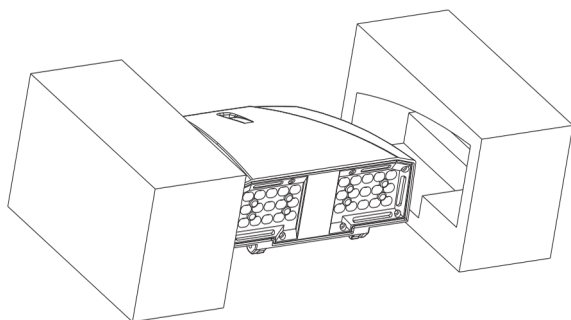

Package

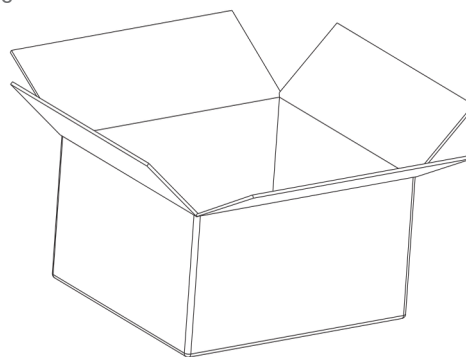

1 PCS

